

*“1995 - The Year of the Virtual LAN”*

IEEE Conference, Maui, July 1995

[mmcnealis@cisco.com](mailto:mmcnealis@cisco.com)

# Agenda

- Where are we today ?
- Virtual LAN Technologies
- IEEE 802.10 Virtual LANs
- vLANs and IEEE 802.1d
- Conclusion

## Where are we today ?

- vLANs over-hyped and under-defined.
- vLAN membership criteria:
  - Port-Centric
  - Protocol/Subnet
  - MAC Address
- Standardization Process.
  - vLAN Identification
  - Automated Configuration
  - vLAN Management

## **vLAN Technologies**

- vLAN Signaling.
- vLAN Tagging.
- LAN Emulation for ATM backbones.

## **vLAN Signaling**

- Switches maintain lists of MAC Addresses associated with a particular vLAN.
- Exchange this information with other switches connected to the backbone.
- Enables intelligent forwarding/directed broadcasting.

## vLAN Signaling Evaluation

- Advantage:

Preserves the original packet format

- Disadvantages:


Requires “routing-like protocol” to distribute MAC <--> vLAN tables

Scalability

Requires unique addressing

## Suitability for vLAN Tagging



- Functions at the Data Link Layer:-

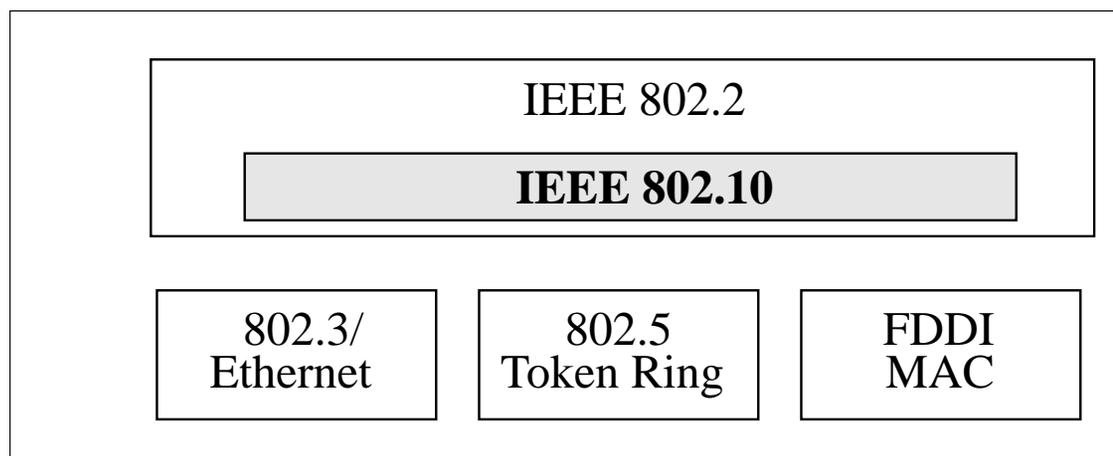

- Scalability - 4 byte vLAN Identifier field.
- Media independent/transparent to non 802.10 vLAN devices.
- Simple to implement/low overhead.
- Potential security benefits.


## IEEE 802.10 Framing

- Single Secure Data Exchange (SDE) PDU.
- 802.10 header inserted between frame's MAC and Data:



- VLAN ID carried in the 4 byte SAID (Security Association Identifier) field.

## 802.10 Frames on the backbone

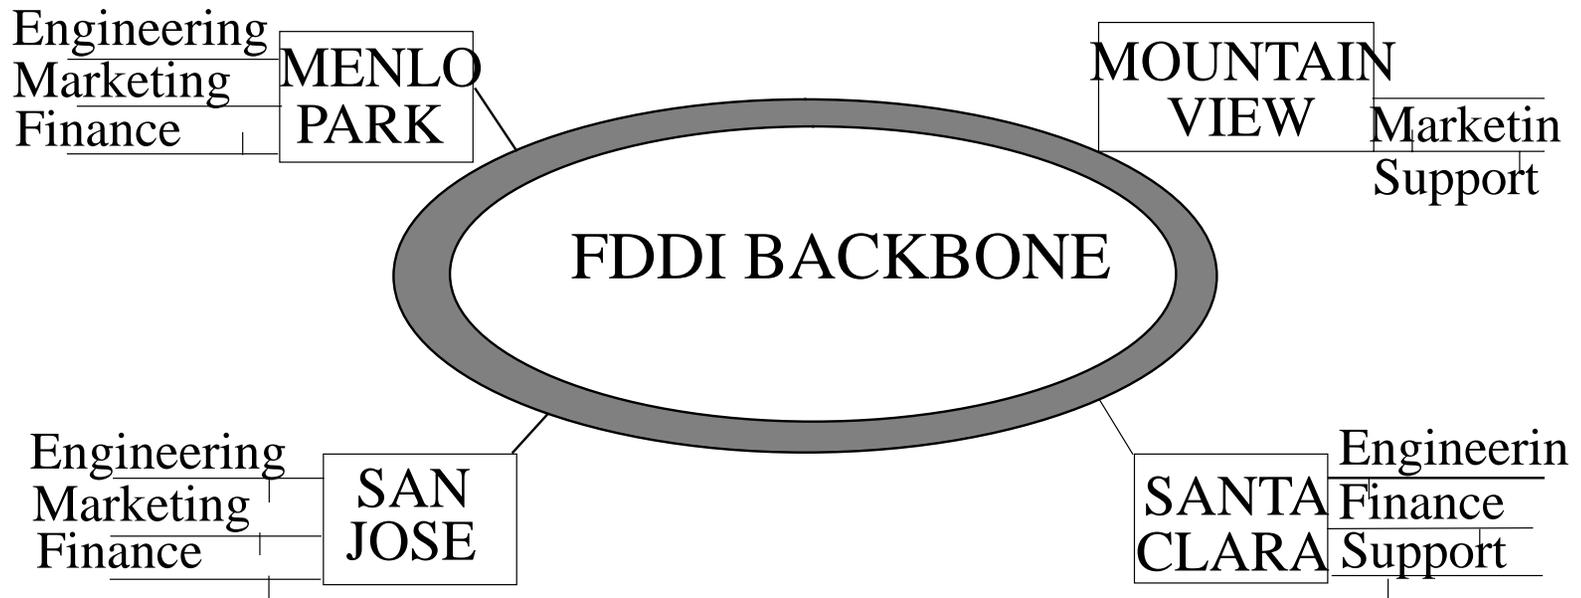

- Entry/Exit points of a shared backbone configured to accept supported colors
- 802.10 header inserted/removed as packets forwarded to/from the shared backbone

## **vLAN Tagging**

- Packets traversing shared backbone carry vLAN ID within the packet header.
- Remote switches make intelligent forwarding decisions based upon vLAN tag.
- vLAN tag inserted/removed as packets enter/exist shared LAN backbone.

## **vLAN Tagging Evaluation**

- **Advantages:**

Scalable.

Independent of vLAN “membership criteria”.

Supports multiple vLANs per source.

Facilitates inter-vLAN routing.

Low processing overhead.

- **Disadvantage:**

potential MTU violation.

## **The IEEE 802.10 Standard**

- Interoperable LAN/MAN Security (SILS) Standard for Secure Data Exchange (SDE).
- Addresses the need for traffic segmentation and network security.
- Optional support for:
  - Fragmentation.
  - Authentication.
  - Encryption.
  - Security Management Information Base (SMIB).

## **vLANs and IEEE 802.1d**

- Autonomous Spanning Tree topology computed for each Virtual LAN.

Better resilience and network stability

Extend scalability by tunneling BPDUs across vLAN backbone


- Requires Bridge ID per vLAN supported.
- Backwards compatibility may mandate new Group Address.

## Conclusion

- Standardization on vLAN Identification is the first of three parts to achieving virtual networking interoperability.
- IEEE 802.10 is a legitimate vLAN tagging mechanism well suited to vLAN switching and should be endorsed.

## VLAN membership based on port/protocol combination

- Existing VLAN membership is at 'interface level'
- In Client/Server environment clients on different LANs currently share the same VLAN/traffic

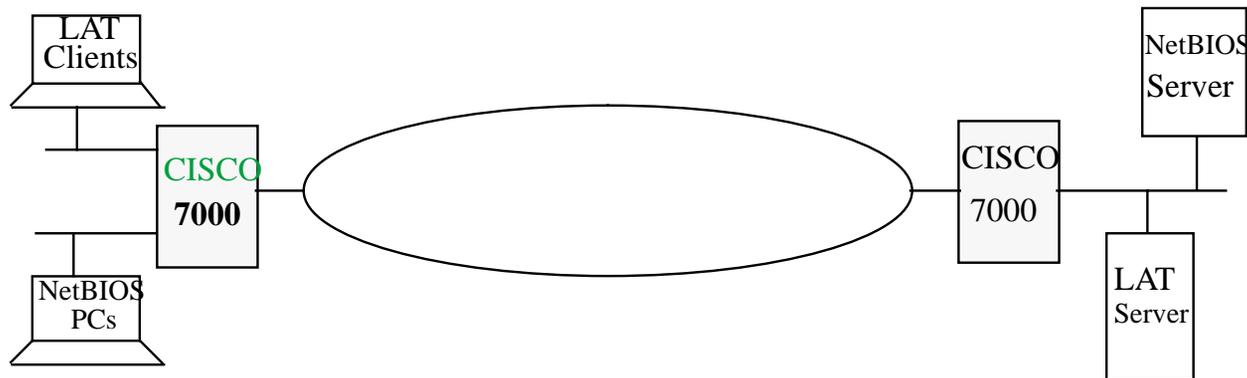

## **vLAN Signaling Evaluation**

- **Advantage:**

Preserves the original packet format

- **Disadvantages:**

Requires “routing-like protocol” to distribute MAC <--> vLAN tables

Scalability

Requires unique addressing