

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                        |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Project                      | <b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                        |
| Title                        | DL Traffic Channel Definition and Enhanced DL Resource Allocation for OFDMA PHY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                        |
| Date Submitted               | 2004-11-17                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                        |
| Source(s)                    | Hang Zhang, Mo-Han Fong, Peiyong Zhu,<br>Wen Tong<br>Nortel Networks<br>Yigal Eliaspur<br>Intel Corp.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <a href="mailto:mhfong@nortelnetworks.com">mhfong@nortelnetworks.com</a><br><br><a href="mailto:yigal.eliaspur@intel.com">yigal.eliaspur@intel.com</a> |
| Re:                          | IEEE P802.16e/D5-2004                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                        |
| Abstract                     | This contribution proposes to define semi-static traffic channels (or region) on the DL. The objective is to reduce the overhead in DL resource allocation. <b>This is a revised contribution. Changes are highlighted in change bar.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                        |
| Purpose                      | Review and Adopt the suggested changes into P802.16e/D5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                        |
| Notice                       | This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                        |
| Release                      | The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                        |
| Patent Policy and Procedures | The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >. |                                                                                                                                                        |

Deleted: 04

Deleted: Voice: +1-613-765-8983  
Fax: +1-613-765-6717Formatted: (Asian) Japanese,  
(Other) English U.S.

# 1 Introduction

In the current DL-MAP message, each DL access region is defined by the following fields: OFDMA symbol offset (8 bits), Subchannel offset (6 bits), number of OFDMA symbols (8 bits) and number of subchannels (6 bits), ie. a total of 28 bits. In this mechanism, the minimum or basic DL resource unit is 1 subchannel (or mini-subchannel) x 1 OFDMA symbol.

The above DL access region definition incurs a lot of overhead. If we assume 20 MSSes are assigned DL resource per frame, 560 bits in DL-MAP will be used for DL access region assignments. In most cases, the DL resource allocation to MSSes does not need to be as granular as a basic unit (i.e. one subchannel (or mini-subchannel) x one OFDMA symbol).

# 2 Proposed Solution

To reduce the overhead associated with DL resource allocation, we propose the following:


## 1) Semi-static traffic channel definition:

- Define DL access regions for a number of DL traffic channels in DCD. The **Channel Definition** (a new TLV for DCD) defines the following parameters for each traffic channel:
  - Access region in terms of OFDMA symbol offset (8 bits), Subchannel offset (6 bits), number of OFDMA symbols (8 bits) and number of subchannels (6 bits)
  - Channel ID (CHID)
  - Channel type (see next bullet)

The channel definition can be updated slowly based on traffic statistics

## 2) Resource allocation description in DL-MAP (using Enhanced DL MAP IE) based on the above semi-static channel definition, where the DL burst region is identified by the CHID:

Figure 1 shows an example of the above scheme.

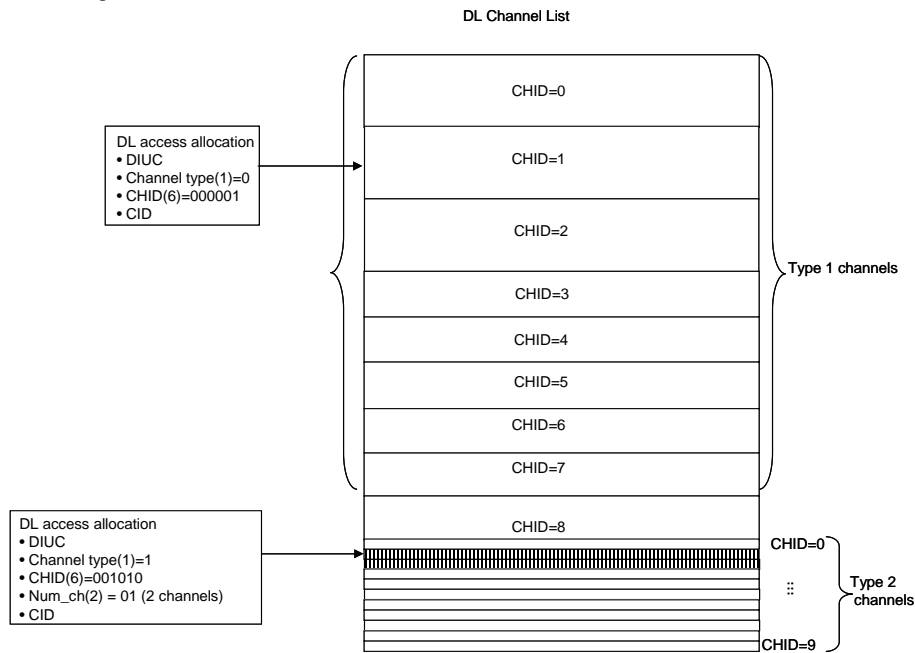

**Deleted:** <#>To allow sufficient flexibility for actual resource allocation through DL-MAP (see point #2 below), we propose to have two types of channel definition.\*  
 <#>Type 1: A channel of type 1 includes a larger number basic resource units and an assigned channel ID (CHID)\*  
 <#>This type of channel is assigned to MSS who has a larger amount of DL traffic\*  
 <#>Only one of this type of channel can be assigned to a MSS in each burst allocation\*  
 <#>Type 2: A channel of type 2 includes a small number of basic resource unit (could be as small as 1 OFDMA symbol x 1 subchannel or 1 OFDMA symbol x 1 mini-subchannel) and an assigned channel ID (CHID)\*  
 <#>This type of channel is assigned to MSS who has a small amount of DL traffic\*  
 <#>One or more of this type of channel can be assigned to a MSS in each burst allocation\*

**Deleted:** <#>For each CID that is assigned DL access, up to one Type 1 channel can be assigned, and multiple Type 2 channels can be assigned to that CID.\*  
 <#>Each Type 1 or Type 2 channel is identified by unique CHID\*  
 <#>For each Type 1 channel assignment, there is 1 bit to indicate channel type, and up to 6 bits for CHID. For each Type 2 channel assignment, there is 1 bit to indicate channel type, up to 6 bits for CHID, and 2 bits to indicate number of Type 2 channel assigned. Therefore, using this proposed scheme, we can reduce the number of bits required to allocate DL access region from 28 bits to 7 bits and 9 bits for Type 1 channel and Type 2 channel respectively.\*

Figure 1. Example of semi-static channel definition and DL access allocation to reduce overhead (The channels layout shown above is logical).

Using the above scheme, the total overhead involved in defining DL access regions is reduced from 560 bits to 140 bits (assume 20 Type 1 channels).

In fact, the overhead can be further reduced by omitting the CHID field in the DL access allocation. This is possible by setting the rule that each subsequent DL access allocation corresponds to the next increment of the CHID value of a particular channel type. In this way, the overhead involved in defining DL access regions can be further reduced to 20 bits (assume 20 channels).

The above semi-static channel definition and assignment does not preclude the normal DL region allocation (using OFDMA symbol offset, subchannel offset etc.) to be performed in the same frame. If a normal DL region allocation overlaps with a particular semi-static DL channel, that channel definition will be over-written.

### 3 Proposed Text Changes

#### Remedy 1:

Define semi-static traffic channels in DCD. Introduce a new TLV called DL channel definition.

[Modify Table 356a – DCD channel encoding]

| Name                         | Type      | Length          | Values                                                                                                                                                                                                                                                                                                                                       |
|------------------------------|-----------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <u>DL channel definition</u> | <u>19</u> | <u>variable</u> | <u>Num_channels (6 bits)</u><br><u>For (i = 0; i &lt; Num_channel; i++)</u><br><u>{</u><br><u>  <u>OFDMA symbol offset (8 bits)</u></u><br><u>  <u>Subchannel offset (6 bits)</u></u><br><u>  <u>No. OFDMA symbols (8 bits)</u></u><br><u>  <u>No. subchannels (6 bits)</u></u><br><u>}</u><br><u>padding bits to align boundary of byte</u> |

#### Remedy 2:

Introduce a new IE called the Enhanced DL MAP IE to assign the semi-static channels to different MSS/CID.

[Insert the following at the end of Section 8.4.5.3.19]

#### 8.4.5.3.19 Enhanced DL MAP IE

This IE is used for BS to indicate the DL resource allocation by using the channel definition specified in the DL channel definition TLV in the DCD.

**Table 284j. Enhanced DL MAP IE**

| Syntax                                             | Size          | Notes                                   |
|----------------------------------------------------|---------------|-----------------------------------------|
| <u>Enhanced DL MAP IE() {</u>                      |               |                                         |
| <u>  <u>Extended DIUC</u></u>                      | <u>4 bits</u> | <u>0x09</u>                             |
| <u>  <u>Length</u></u>                             | <u>4 bits</u> | <u>Length in bytes</u>                  |
| <u>  <u>Num_Assignment</u></u>                     | <u>4 bits</u> | <u>Number of assignments in this IE</u> |
| <u>  <u>For (i=0; i&lt;Num_Assignment;i++)</u></u> |               |                                         |

Deleted: or 180 bits (assume 20 Type 2 channels) if we assume 20 connections (CIDs) are scheduled in a frame

Deleted: This is illustrated in Figure 2.

Deleted: Type 1

Deleted: / 60 bits (assume 20 Type 2 channels), if we assume 20 connections (CIDs) are scheduled in a frame

Deleted: ¶

¶

DIUC; Channel type(

DIUC; Channel type(

DIUC; Channel type(

DIUC; Channel type(

DIUC; Channel type(1

DIUC; Channel type(

DIUC; Channel type(

DIUC; Channel type(

DIUC; Channel type(

DIUC; Channel type(1=1;Num\_ch(2) = 00 (1 cl

DIUC; Channel type(1)=1;Num\_ch(2) = 01 (2 c

DIUC; Channel type(1)=1;Num\_ch(2) = 01 (2 cl

DIUC; Channel type(1)=1;Num\_ch(2) = 10 (3 c

DIUC; Channel type(1)=1;Num\_ch(2) = 00 (1 cl

DIUC; Channel type(1)=1;Num\_ch(2) = 01 (2 c

Figure 2. Example of semi-static channel definition and DL access allocation for the case where CHID is omitted (The channels layout shown above is logical)¶

Deleted: The case shown in Figure 2 above (i.e. CHID omission) may not always be possible under certain situation where the access region defined for (... [1]

Deleted: Size of CHID field (6 bits)¶

Deleted: Type 1

Deleted: type1

Deleted: Num\_Type 2 channels (6 bits)¶  
For (i = 0; i < Num\_type2\_channel; i++)¶  
{¶  
  ... [2]

Deleted: the two step DL resource assignment method

Deleted: \_

Deleted: \_

|                                     |         |                                                                                                           |
|-------------------------------------|---------|-----------------------------------------------------------------------------------------------------------|
| <u>if</u> (INC_CID == 1) {          |         | The DL-MAP starts with INC_CID = 0. INC_CID is toggled between 0 and 1 by the CID-SWITCH_IE() (8.4.5.3.7) |
| <u>CID</u>                          | 16 bits |                                                                                                           |
| <u>DIUC</u>                         | 4 bits  |                                                                                                           |
| <u>Boosting</u>                     | 3 bits  |                                                                                                           |
| <u>Repetition Coding Indication</u> | 2 bits  |                                                                                                           |
| <u>CHID</u>                         | 6 bits  | As defined in DCD                                                                                         |
| }                                   |         |                                                                                                           |

**Formatted:** Left, Space Before: Auto, Widow/Orphan control, Don't allow text to wrap in the middle of a word

**Formatted:** Font: (Default) TimesNewRoman, (Asian) SimSun, 9 pt, No underline, Font color: Auto, Complex Script Font: TimesNewRoman, 9 pt, (Asian) Chinese PRC, (Complex) Hebrew

**Deleted:** Assignment Code ... [3]

**Deleted:** \_\_\_\_\_

**Deleted:** Num\_bits\_CHID (as defined in DCD)

**Deleted:** If (Assignment\_Code == 001) ... [4]

**Deleted:** Assignment Code\*  
0b000: one type 1 channel assigned, with explicitly indicated CHID\*  
0b001: type 2 channel(s) assigned, with explicitly indicated the CHID of the first channel assigned\*  
0b010: one type 1 channel + type 2 channel(s) assigned, with explicitly indicated CHIDs for the type 1 channel and the first type 2 channel\*  
0b011: Using normal region description. When set, the resource allocation shall override the channel definition in DCD for the overlapping region.\*  
0b100: one type 1 channel assigned, without explicitly indicated CHID (the type 1 channel assigned shall correspond to the next type 1 CHID, following the previous type 1 channel assignment)\*  
0b101: type 2 channel(s) assigned, without explicitly indicated CHID (the first type 2 channel assigned shall correspond to the next type 2 CHID, following the previous type 2 channel assignment) \*  
0b110: one type 1 channel + type 2 channel(s) assigned, without explicitly indicated CHIDs for the type 1 channel and the type 2 channel (the type 1 channel assigned shall correspond to the next type 1 CHID, following the previous type 1 channel assignment; the first ... [5]

Num Assignment  
Number of assignments in this IE

CHID  
Channel index defined in DCD message

**Remedy 3:**  
 Introduce a capability TLV.

[Modify table in section 11.8.3.7.6]

| Type | Length | Value                                                                                                       | Scope                                                    |
|------|--------|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| 155  | 1      | bit #0: H-ARQ MAP capability<br><br>bit #1: <u>DL channel definition support</u><br><br>bit #12-7: reserved | SBC-REQ (see 6.3.2.3.23)<br><br>SBC-RSP (see 6.3.2.3.24) |

**Deleted:** Num\_Channels\*  
\_\_\_\_\_ Number of type 2 channel(s) assigned\*

**Formatted:** Font: Bold, Complex Script Font: Bold

**Formatted:** Font: Not Italic, Complex Script Font: Not Italic

**Formatted Table**

**Formatted:** Underline

**Formatted:** Underline

**Formatted:** Strikethrough

**Formatted:** Underline

The case shown in Figure 2 above (i.e. CHID omission) may not always be possible under certain situation where the access region defined for certain semi-static channels is assigned to or overlapped with other 'irregular' region allocation, e.g. DL/UL-MAP, SHO zone. Under such situation, the CHID needs to be included for the next semi-static channel assignment following the 'irregular' region. For subsequent semi-static channel assignments, CHID can again be omitted. This is illustrated in Figure 3, which includes scenarios where DL-MAP occupies partially the region defined for Type 1 channel #0 and SHO region occupies partially the region defined for Type 1 channel #3. For the above 2 scenarios, CHID is required for the next semi-static channel assigned following the 'irregular' region.

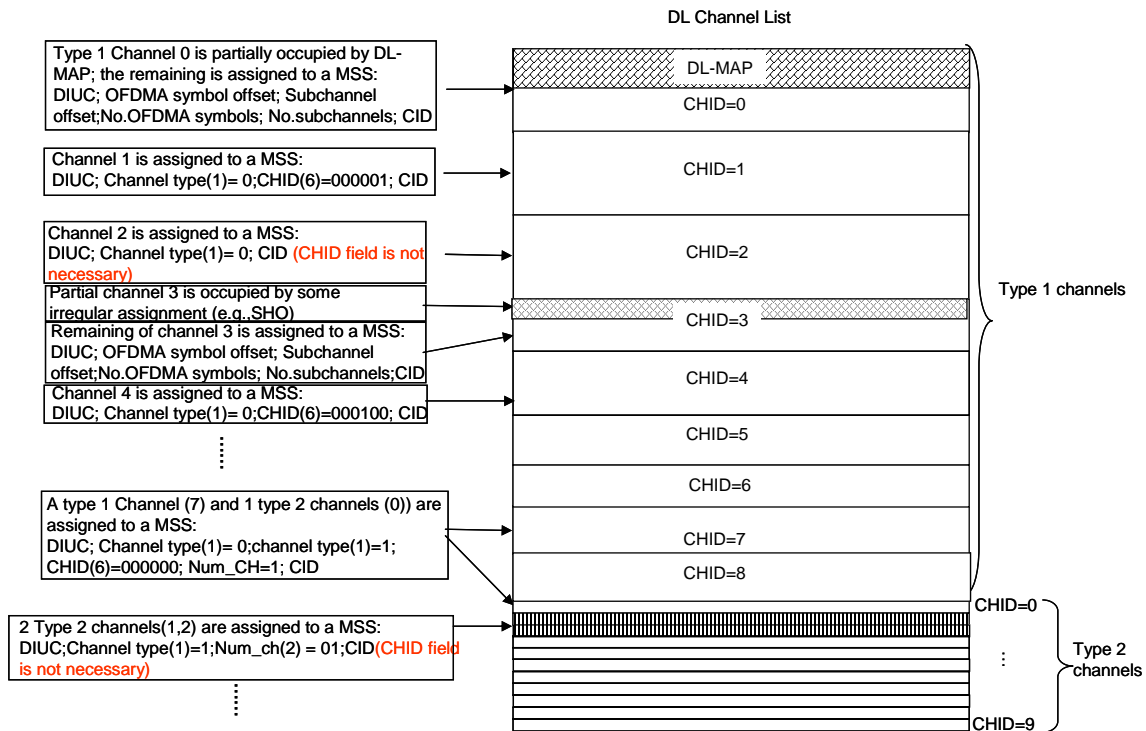


Figure 3. Example of semi-static channel definition and DL access allocation for the case where there is irregular assignment that overlaps with region defined for the semi-static channel (The channels layout shown above is logical)

```

Num Type 2 channels (6 bits)
For (i = 0; i < Num_type2_channel; i++)
{
  OFDMA symbol offset (8 bits)
  Subchannel offset (6 bits)
  No. OFDMA symbols (8 bits)
  No. subchannels (6 bits)
}

```

Assignment Code

3 bits

0b000: one type 1 channel assigned.

with explicitly indicated CHID  
 0b001: type 2 channel assigned, with explicitly indicated CHID of the first type 2 channel  
 0b010: one type 1 channel + type 2 channel(s) assigned, with explicitly indicated CHIDs for the type 1 channel and the first type 2 channel  
 0b011: Using normal region description  
 0b100: one type 1 channel assigned, without explicitly indicated CHID  
 0b101: type 2 channel(s) assigned, without explicitly indicated CHID  
 0b110: one type 1 channel + type 2 channel(s) assigned, without explicitly indicated CHIDs for the type 1 channel and the first type 2 channel  
 0b111: reserved

If (Assignment Code == 000)

If (Assignment Code == 001)

|                    |                                          |  |                          |
|--------------------|------------------------------------------|--|--------------------------|
| {                  |                                          |  |                          |
| <u>CHID</u>        | <u>Num_bits_CHID (as defined in DCD)</u> |  | <u>As defined in DCD</u> |
| <u>Num_Channel</u> | <u>2 bits</u>                            |  |                          |
| }                  |                                          |  |                          |

If (Assignment Code == 010)

|                     |                                          |  |                          |
|---------------------|------------------------------------------|--|--------------------------|
| {                   |                                          |  |                          |
| <u>CHID</u>         | <u>Num_bits_CHID (as defined in DCD)</u> |  | <u>As defined in DCD</u> |
| <u>CHID</u>         |                                          |  |                          |
| <u>Num_channels</u> | <u>2 bits</u>                            |  |                          |
| }                   |                                          |  |                          |

If (Assignment Code == 011)

|                            |               |  |  |
|----------------------------|---------------|--|--|
| {                          |               |  |  |
| <u>OFDMA_symbol_offset</u> | <u>8 bits</u> |  |  |
| <u>Subchannel_offset</u>   | <u>6 bits</u> |  |  |
| <u>No. OFDMA symbols</u>   | <u>8 bits</u> |  |  |
| <u>No. subchannels</u>     | <u>6 bits</u> |  |  |
| }                          |               |  |  |

If (Assignment Code =

-

101|110)

Num\_Channel

2 bits

Indicated in DCD

Page 3: [5] Deleted

mhfong

11/17/2004 7:02 PM

Assignment Code

0b000: one type 1 channel assigned, with explicitly indicated CHID

0b001: type 2 channel(s) assigned, with explicitly indicated the CHID of the first channel assigned

0b010: one type 1 channel + type 2 channel(s) assigned, with explicitly indicated CHIDs for the type 1 channel and the first type 2 channel

0b011: Using normal region description. When set, the resource allocation shall override the channel definition in DCD for the overlapping region.

0b100: one type 1 channel assigned, without explicitly indicated CHID (the type 1 channel assigned shall correspond to the next type 1 CHID, following the previous type 1 channel assignment)

0b101: type 2 channel(s) assigned, without explicitly indicated CHID (the first type 2 channel assigned shall correspond to the next type 2 CHID, following the previous type 2 channel assignment)

0b110: one type 1 channel + type 2 channel(s) assigned, without explicitly indicated CHIDs for the type 1 channel and the type 2 channel (the type 1 channel assigned shall correspond to the next type 1 CHID, following the previous type 1 channel assignment; the first type 2 channel assigned shall correspond to the next type 2 CHID, following the previous type 2 channel assignment)

0b111: reserved