

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>CINR measurements using the EESM method</b>	
Date Submitted	<b>2005-03-09</b>	
Source(s)	Ran Yaniv, Danny Stopler, Tal Kaitz, Kfir Blum <b>Alvarion Ltd.</b>	<a href="mailto:ran.yaniv@alvarion.com">ran.yaniv@alvarion.com</a> <a href="mailto:tal.kaitz@alvarion.com">tal.kaitz@alvarion.com</a> <a href="mailto:danny.stopler@alvarion.com">danny.stopler@alvarion.com</a>
Re:	Call for comments, Sponsor Ballot on 802.16e/D6	
Abstract		
Purpose		
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.	

# CINR measurements using the EESM method

*Ran Yaniv, Danny Stopler, Tal Kaitz, Kfir Blum*

**Alvarion Ltd.**

## **1 Introduction**

The current 802.16e SINR reporting mechanism requires the MSS to report a straightforward CINR measurement. This mechanism does not provide the BS with any knowledge on the frequency selectivity of the channel and noise (especially prominent with partially loaded cells and with multipath). This knowledge is important since, contrary to the AWGN channel, in a frequency selective channel there is no longer a 1 to 1 relation between amount of increase in power and amount of improvement in “effective SINR”<sup>1</sup>. Furthermore, the relation is dependent on MCS level. This lack of knowledge in the BS side results in larger fade margins, which translates directly to reduction in capacity.

In this contribution we propose a mechanism based on the EESM model that provides the BS with sufficient knowledge on the channel-dependent relationship between power increase, MCS change and improvement in effective SINR. The EESM method is a well known SINR predictor in the context of OFDM/A [1][2][3][4].

The contribution is organized as follows: in section 1 we introduce the EESM method. Section 2 discusses the accuracy of the EESM model. Section 3 gives an outline of the proposed solution, followed by a detailed description of the text changes.

## **2 Exponential Effective SIR Mapping (SIR)**

To estimate demodulator performance in a channel with frequency selective signal and/or noise, a known method is the so-called “exponential effective SIR mapping” (EESM) [1][3][4]. In a sense, the EESM is a channel-dependent function that maps power level and MCS level to SINR values in the AWGN channel domain. This allows using this mapping along with AWGN assumptions (such as effect of increase in power, CINR/MCS threshold tables) in order to predict the effect of MCS and boosting modification. The method has been shown to yield an accurate estimation of the AWGN-equivalent SINR (henceforth referred to as “effective SINR”) for frequency selective channels. Section 2 discusses the accuracy of the EESM model.

The EESM method estimates the effective SINR using the following formula:

$$\gamma_{eff} \equiv EESM(\gamma, \beta) \equiv -\beta \cdot \ln \left( \frac{1}{N} \cdot \sum_{i=1}^N e^{-\frac{\gamma_i}{\beta}} \right)$$

---

<sup>1</sup> Effective SINR = AWGN-equivalent SINR, i.e. Equivalent SINR in AWGN channel that results in the same error rate.

where  $\gamma$  is a vector  $[\gamma_1, \gamma_2, \dots, \gamma_N]$  of the per-tone SINR values, which are typically different in a selective channel.

In general, we would like the MSS to report the effective SINR to the BS, and have the BS decide what modulation and coding to use and with what power boosting. However, as stated earlier, this is complicated by the fact that the relationship between increase in power and increase in effective SINR is both channel-dependent and MCS-dependent. **In contrast to the AWGN channel case, 1dB increase in transmit power does *not* translate to 1dB increase in effective SINR.**

In context of EESM, this implies that for each MCS a different  $\beta$  should be utilized, and for each such  $\beta$ , different boosting should be considered. As a result, the BS is required to know the dependence of effective SINR on  $\beta$  and power increase; thus computation of equivalent SNR can no longer remain solely in the MSS's territory.

The increase of  $\gamma_{eff}$  due to boosting is  $\beta$  dependent, as can be seen below (where  $B$  denotes the boost ratio)

$$EESM(\gamma \cdot B, \beta) \equiv -\beta \cdot \ln \left( \frac{1}{N} \cdot \sum_{i=1}^N e^{-\frac{\gamma_i \cdot B}{\beta}} \right) \neq EESM(\gamma, \beta) \cdot B$$


This implies that EESM is a two-dimensional mapping of boost level and an MCS-dependent quantity ( $\beta$ ) to effective SINR. However, we can simplify by observing that

$$EESM(B \cdot \gamma, \beta) \equiv -\beta \cdot \ln \left( \frac{1}{N} \cdot \sum_{i=1}^N e^{-\frac{\gamma_i \cdot B}{\beta}} \right) = B \cdot \left( -\frac{\beta}{B} \right) \cdot \ln \left( \frac{1}{N} \cdot \sum_{i=1}^N e^{-\frac{\gamma_i}{\beta/B}} \right) = B \cdot EESM(\gamma, \beta/B)$$

which shows that given an SINR-per-tone vector it is sufficient for the BS to know the MSS-specific curve relating EESM to  $\beta$ . Both boosting and rate adaptation can be done based on the same curve, thus reducing the mapping problem to one dimension.

## 2.1 Further simplification

In Figure 1 we plot EESM as function of  $\beta$ , for different cases. The first graph plots EESM for 4 different  $\gamma$  vectors, drawn from 24 independent Rayleigh distributions. Both EESM and  $\beta$  are plotted in dB. It can be seen that the graphs can be approximated locally as linear (in dB=>dB), and have overall a linear shape with saturation at  $\beta > 15$ dB. Saturation occurs for practically unachievable  $\beta$  values. This linear shape may be used for compressing the curve for transmission to the BS.

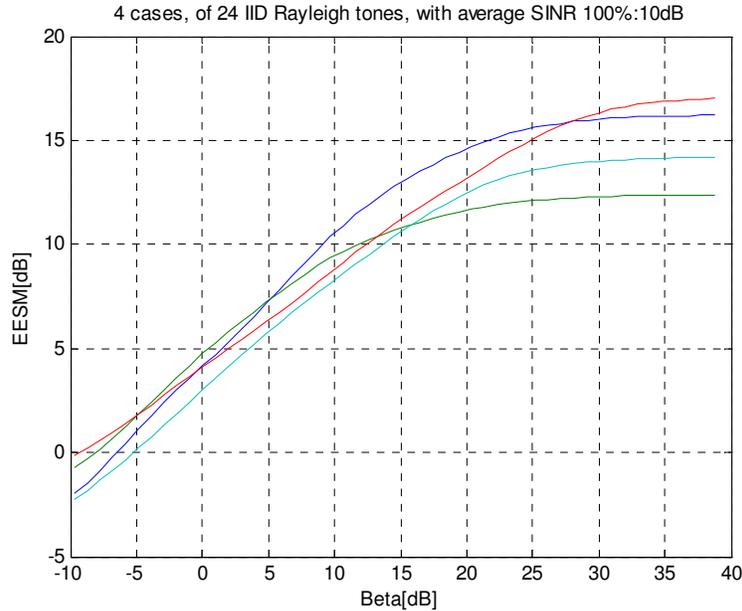

**Figure 1 – EESM as a function of  $\beta$  for 4 channel realizations drawn from 24 independent Rayleigh distributions.**

For the purpose of fast rate adaptation or Hybrid ARQ, the MSS needs to provide instantaneous SINR and BS may decide rate and boosting, according to MSS instantaneous SINR. However the number of relevant rates is limited and their  $\beta$  values are close. Furthermore, the boosting range is limited, so we are typically interested in a narrow region of the  $\beta$  axis. Thus a local linear approximation suffices, and the graph may be compressed effectively. This implies one straightforward solution – the MSS can initially (e.g. on handover to a new cell) send a table of EESM SINR thresholds and  $\beta$  values for each MCS, and then at a higher speed transmit a local linear approximation for the EESM( $\beta$ ) curve. A more simplified solution is described in section 3.

### **3 Accuracy of the EESM method**

The accuracy of the EESM modeling technique as a predictor for the AWGN-equivalent SINR was analyzed extensively for OFDM in [1][2][3].

In addition, we performed a short examination in order to validate the accuracy of EESM for 802.16. The following methodology was used.

(A) First, optimal  $\beta$  values were estimated for each MCS level as follows:

- A reference PER(SNR) for AWGN conditions was generated for each MCS.
- N multi-path channel realizations (SUI3 profile) were generated at random.
- For each channel realization, a PER(SINR) curve was generated for all MCS types through simulation.

- For each MCS, a  $\beta$  estimate was obtained such that the mean square error between the (AWGN-equivalent) EESM SINR and the true AWGN SINR was minimized.

(B) Then, the accuracy of EESM was evaluated:


- K other multi-path channel realizations were generated.
- For each channel realization, a PER(SINR) curve was generated for each MCS type through simulation.
- For each MCS, we compared the AWGN-equivalent SINR obtained using EESM (with the estimated  $\beta$  value) and the AWGN-equivalent SINR obtained from the simulation.

The following scenario was examined:

- DL PUSC zone, full bandwidth.
- CTC encoding.
- 120 byte payload, various MCS levels.
- SUI3 multi-path channel.
- $\beta$  fit optimized for PER=1e-2.

The following figures show, for each MCS (QPSK  $\frac{1}{2}$ , QPSK  $\frac{3}{4}$ , 16-QAM  $\frac{1}{2}$ , and 16-QAM  $\frac{3}{4}$ ), the distribution of the EESM fit error (on the left) and the mean SINR vs. EESM prediction error (on the right) for the channel realizations tested in step (B).

**As can be observed, all EESM prediction errors fall within a +/-0.5dB range for QPSK and within a +/-1dB range for 16-QAM.**

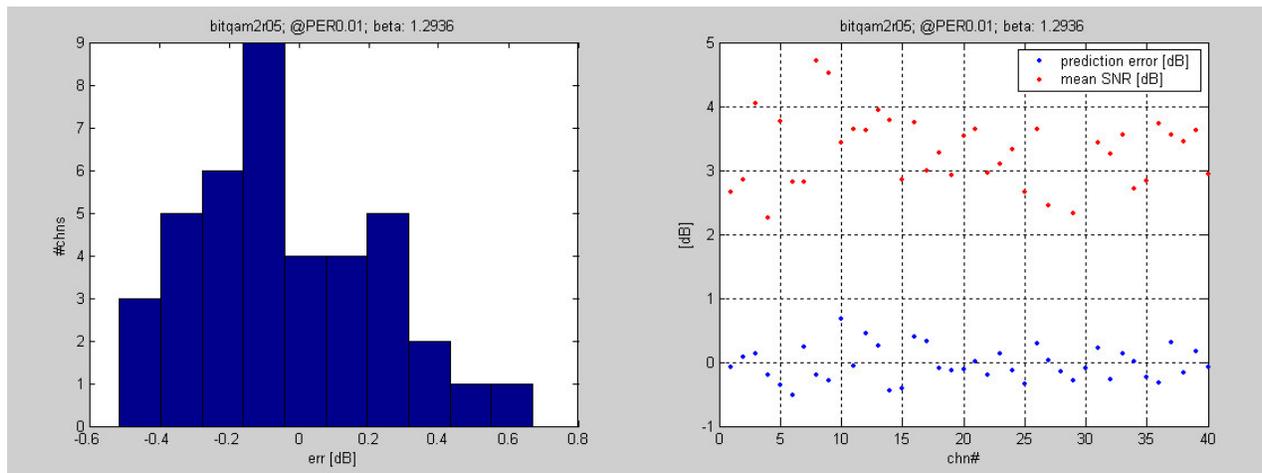

**Figure 2 – QPSK  $\frac{1}{2}$ : (left) EESM fit error, (right) mean SINR and prediction error per channel realization**

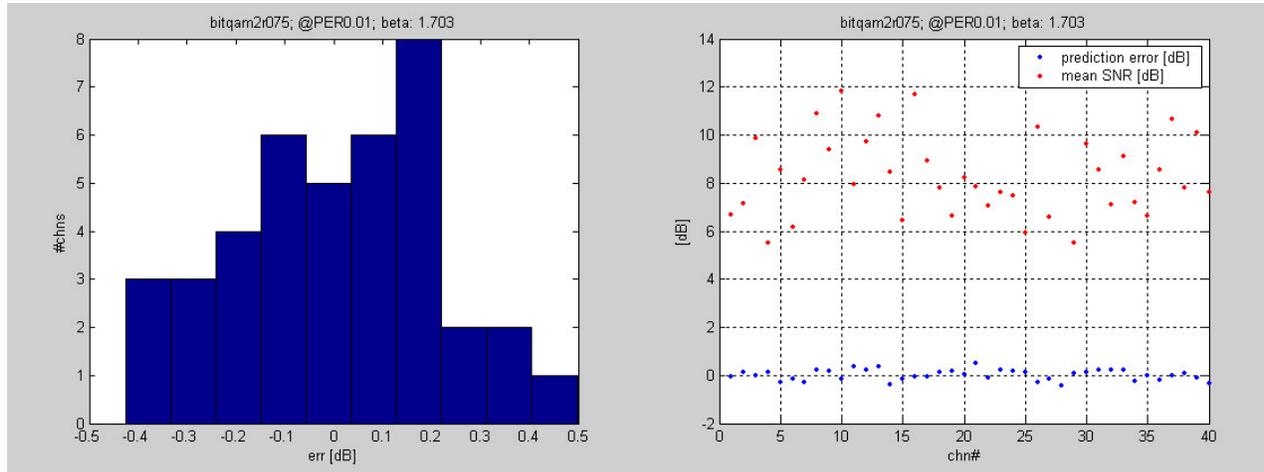


Figure 3 - QPSK  $\frac{3}{4}$ : (left) EESM fit error, (right) mean SINR and prediction error per channel realization

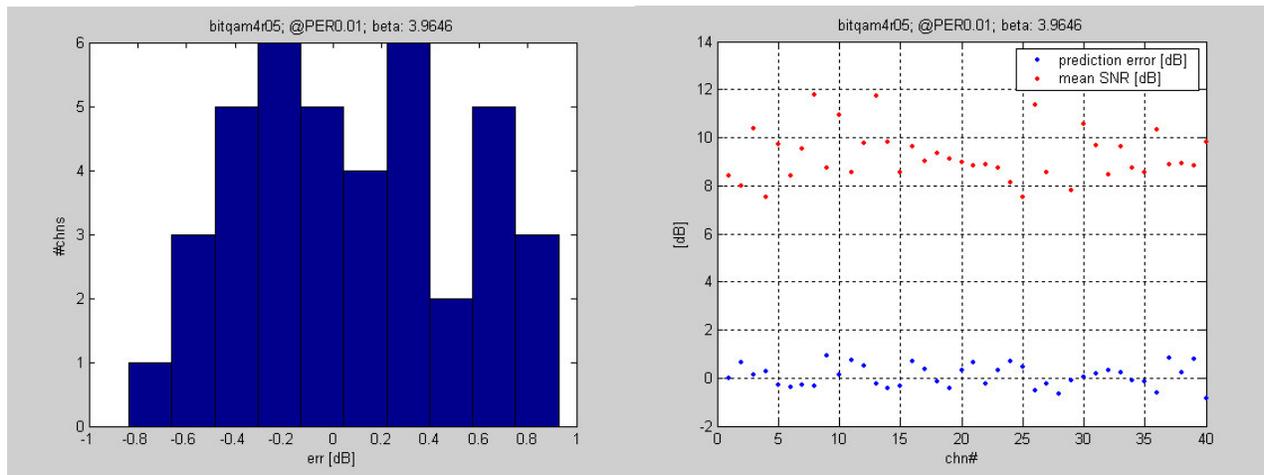


Figure 4 - 16-QAM  $\frac{1}{2}$ : (left) EESM fit error, (right) mean SINR and prediction error per channel realization

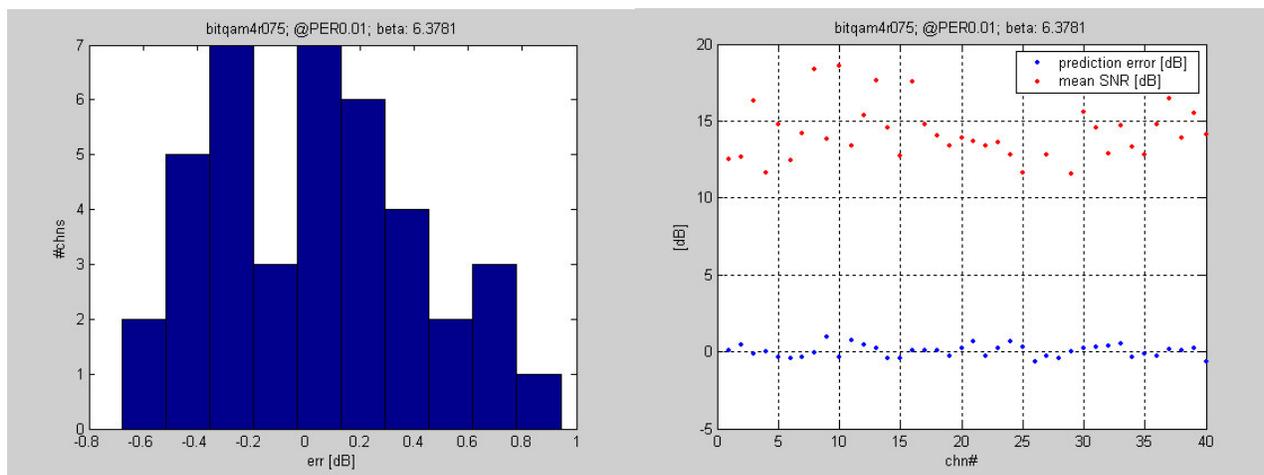


Figure 5 - 16-QAM  $\frac{3}{4}$ : (left) EESM fit error, (right) mean SINR and prediction error per channel realization

## 4 Outline of the proposed solution

In section 1.1 we showed that the relationship between EESM and  $\beta$  can be expressed as a linear approximation. The proposed mechanism is as follows:

- MSS computes SINR-per-tone vectors for the purpose of EESM. The BS assists by providing a subchannel with assured constant output power throughout the zone duration.
- MSS computes the slope of EESM( $\beta$ ) in the  $\beta$  range of interest. The range of interest depends on current MCS level – i.e. an MSS that operates in the QPSK area should compute the local slope for the QPSK range of  $\beta$ s rather than the local slope for the QAM-64 range of  $\beta$ s.
- MSS sends the slope to the BS, and updates the BS whenever the slope changes (due to change in channel conditions) – slow update.
- MSS uses  $\beta$  values from a table of  $\beta$  per MCS (provided by the BS) to compute CINR measurement based on the EESM formula. These measurements are averaged.
- The MSS compensates for implementation losses so that the transmitted CINR values are aligned with normalized threshold levels supplied by the BS.
- A CINR report consists of a single CINR value. The MSS sends the CINR measurement that corresponds to one of the  $\beta$ s; this  $\beta$  is selected using a rule, which ensures that the BS knows its value.

The BS now has all needed information (EESM CINR value,  $\beta$  for which it was computed, local linear approximation of EESM( $\beta$ )) in order to predict the effect of boosting and change of MCS level with the MSS's current channel conditions.

## 5 Detailed Text Changes

=====  
*[Add the following entries to table 14, page 34:]*

Type	Message name	Message description	Connection
...			
<del>66</del> 66	<u>CINRMODE_REQ</u>	<u>CINR measurement mode change request message</u>	<u>Basic</u>
<del>67</del> 67	<u>CINRMODE_RSP</u>	<u>CINR measurement mode change response message</u>	<u>Basic</u>
<del>66</del> 68-255		<i>Reserved</i>	

[Add the following new section 6.3.2.3.63]

[Note to editor: the correct table number should replace XXX]

### 6.3.2.3.63 CINR measurement mode change request (CINRMODE\_REQ) message

The BS may decide to change the CINR measurement mode of an MSS that supports EESM CINR measurement by sending a CINRMODE\_REQ message, to which the MSS shall respond with a CINRMODE\_RSP message. This message only applies to OFDMA PHY mode.

Table WWW – CINRMODE\_REQ message format

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>CINRMODE_REQ message format {</u>		
<u>Management Message Type = 66</u>	<u>8 bits</u>	
<u>CINR measurement mode</u>	<u>1 bit</u>	<u>0b0 – Regular CINR measurements</u> <u>0b1 – EESM CINR measurements</u>
<u>If (CINR measurement mode == 0b1)</u>		
<u>{</u>		
<u>CINR reference FEC type</u>	<u>2 bits</u>	<u>Indicates the FEC type for which the normalized C/N and <math>\beta</math> values in section 8.4.11.4, table XXX, apply:</u> <u>0b00 = CC</u> <u>0b01 = CTC</u> <u>0b10-0b11 = Reserved</u>
<u>Zone index</u>	<u>3 bits</u>	<u>Index of the zone within the frame on which EESM CINR shall be measured. The first zone in the frame has index 0.</u>
<u>Subchannel index</u>	<u>8 bits</u>	<u>Index of the subchannel on which EESM CINR shall be measured.</u>
<u>Reserved</u>	<u>3 bits</u>	<u>Shall be set to zero</u>
<u>}</u>		
<u>Start frame</u>	<u>7 bits</u>	<u>6 LSBs of the frame number in which the new measurement mode is activated; at least 2 frames ahead of the current frame.</u>
<u>}</u>		

### CINR measurement mode

Indicates the new measurement mode that is activated from the frame specified by 'start frame' field. The MSS shall reset all message time indices related to CINR measurement (see sections 8.4.11.3 and 8.4.11.4) upon activation of the new CINR measurement mode.

[Add the following new section 6.3.2.3.64]

### 6.3.2.3.64 CINR measurement mode change response (CINRMODE\_RSP) message

The CINRMODE\_RSP message shall be used by the MSS to acknowledge receipt of the CINRMODE\_REQ message and to send relevant parameters. The MSS shall send

its response prior to the frame number in which the new measurement mode is activated, as specified in the ‘start frame’ field of the received CINRMODE\_REQ message. The MSS may also send an CINRMODE\_RSP message in an unsolicited fashion to notify the BS of a change in the slope of the CINR vs.  $\beta$  curve.

Table UUU – CINRMODE\_RSP message format

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>CINRMODE_RSP message format {</u>		
<u>Management Message Type = 67</u>	<u>8 bits</u>	
<u>Beta slope included</u>	<u>1 bit</u>	
<u>If (Beta slope included == 1) {</u>		
<u>Beta_slope</u>	<u>8 bits</u>	<u>Slope of mean EESM CINR (dB) as a function of <math>10\log_{10}(\beta)</math> (dB) for EESM-based measurements, in units of 0.01. See section 8.4.11.4.</u>
<u>1</u>		
<u>1</u>		

*[Add the following new section 8.4.11.4]*

*[Note: the correct table number should replace XXX]*

#### 8.4.11.4 Optional EESM CINR measurement mode

The EESM method for computing effective CINR provides the BS with a tool to better estimate the optimal MCS and/or boosting level for the MSS by accounting for the frequency selectivity of the signal and the noise. The BS may switch the CINR measurement mode of the MSS to EESM by sending a CINRMODE\_REQ message. Following activation of this mode, CINR mean and/or standard deviation (reported either through REP-REQ/RSP or through fast-feedback channel) shall be computed using the EESM method. In this mode, the MSS measures SINR per subcarrier on a subchannel indicated by the BS. The BS shall facilitate this by maintaining constant output power on the indicated subchannel (specified in the latest CINRMODE\_REQ message) throughout the duration of the zone specified in the CINRMODE\_REQ message.

The EESM CINR estimate of a single message  $k$  shall be derived as a function of the weighting factor  $\beta$  using

$$\underline{CINR_{\beta}[k] = EESM(\{\gamma_1, \dots, \gamma_N\}, \beta)}$$

Where:

$$EESM(\{\gamma_1, \dots, \gamma_N\}, \beta) = -\beta \cdot \ln\left(\frac{1}{N} \sum_{i=1}^N \exp\left(-\frac{\gamma_i}{\beta}\right)\right)$$

$\{\gamma_1, \dots, \gamma_N\}$  are the set of per-subcarrier CINR values (in linear scale) corresponding to the data subcarriers of the message (the manner in

$\beta$  which these are derived is left to individual implementation). The CINR values shall not include the effects of boosting.  $\beta$  is a weighting coefficient.

$EESM(\{\gamma_1, \dots, \gamma_N\}, \beta)$  shall be derived with a relative accuracy of +/-1/2dB and an absolute accuracy of +/-1dB. The mean CINR statistic (in dB) shall be derived from a multiplicity of single messages using

$$\hat{\mu}_{CINR\_dB, \beta}[k] = 10 \log_{10}(\hat{\mu}_{CINR, \beta}[k])$$

where

$$\hat{\mu}_{CINR, \beta}[k] = \begin{cases} CINR_{\beta}[0] & k = 0 \\ (1 - \alpha_{avg}) \cdot \hat{\mu}_{CINR, \beta}[k-1] + \alpha_{avg} \cdot CINR_{\beta}[k] & k > 0 \end{cases}$$

$k$  is the time index for the message (with initial message being index by  $k=0$ , the next message by  $k=1$ , etc.)

$\alpha_{avg}$  is an averaging parameter specified by the BS.

The standard deviation statistic (in dB) shall be derived from a multiplicity of single messages using

$$\hat{\sigma}_{CINR\_dB, \beta}[k] = 5 \log_{10} \left( \left| \hat{x}_{CINR, \beta}^2[k] - \hat{\mu}_{CINR, \beta}^2[k] \right| \right)$$

where

$$\hat{x}_{CINR, \beta}^2[k] = \begin{cases} |CINR_{\beta}[0]|^2 & k = 0 \\ (1 - \alpha_{avg}) \cdot \hat{x}_{CINR, \beta}^2[k-1] + \alpha_{avg} \cdot |CINR_{\beta}[k]|^2 & k > 0 \end{cases}$$

The MSS reports the mean and standard deviation of CINR for a single value of  $\beta$ . In order to resolve ambiguity, the mean and standard deviation of CINR shall be reported for the value of  $\beta$  that corresponds to the highest MCS in table XXX for which

$$\hat{\mu}_{CINR\_dB, \beta(MCS)}[k] > \text{Normalized C/N}(MCS)$$

Table XXX – normalized C/N and  $\beta$  per MCS

<u>MCS</u>	<u>Normalized C/N [dB]</u>	<u>10log<sub>10</sub>(<math>\beta</math>) [dB]</u>
QPSK 1/2	6dB	TBD
QPSK 3/4	TBD	TBD
16-QAM 1/2	TBD	TBD
16-QAM 3/4	TBD	TBD
64-QAM 1/2	TBD	TBD
64-QAM 2/3	TBD	TBD
64-QAM 3/4	TBD	TBD
64-QAM 5/6	TBD	TBD

The values in table XXX may be overridden by the BS for specific FEC types by using dedicated UC D message TLVs.

In addition, the MSS shall compute the linear approximation of the  $\hat{\mu}_{CINR\_dB}(10\log(\beta))$  curve and update it's slope using EESM\_RSP messages as channel conditions change. The manner in which the slope is computed is left to individual implementation.

The CINR value shall not include the SNR improvement resulting from repetition.

The reported CINR shall include all receiver implementation losses so that an MSS reporting EESM-based CINR value higher or equal to a C/N value appearing in table XXX is able to demodulate data in the respective modulation and coding rate, in the current selective channel conditions, with BER equal to 1e-6 using the FEC indicated in the CINRMODE\_REQ message. For example, a SS reporting CINR=6dB should be able to decode QPSK rate 1/2 with BER equal to 1e-6.

*[Add the following new section 8.4.13.5]*

#### **8.4.13.5 Receiver minimum required $\beta$ values for EESM CINR measurements**

The minimum required  $\beta$  for each MCS are shown in table YYY.

Table YYY – minimum required  $\beta$  per MCS

<u>MCS</u>	<u><math>10\log_{10}(\beta)</math> [dB]</u>
<u>CC, QPSK 1/2</u>	<u>TBD</u>
<u>CC, QPSK 3/4</u>	<u>TBD</u>
<u>CC, 16-QAM 1/2</u>	<u>TBD</u>
<u>CC, 16-QAM 3/4</u>	<u>TBD</u>
<u>CC, 64-QAM 1/2</u>	<u>TBD</u>
<u>CC, 64-QAM 2/3</u>	<u>TBD</u>
<u>CC, 64-QAM 3/4</u>	<u>TBD</u>
<u>CTC, QPSK 1/2</u>	<u>TBD</u>
<u>CTC, QPSK 3/4</u>	<u>TBD</u>
<u>CTC, 16-QAM 1/2</u>	<u>TBD</u>
<u>CTC, 16-QAM 3/4</u>	<u>TBD</u>
<u>CTC, 64-QAM 1/2</u>	<u>TBD</u>
<u>CTC, 64-QAM 2/3</u>	<u>TBD</u>
<u>CTC, 64-QAM 3/4</u>	<u>TBD</u>
<u>CTC, 64-QAM 5/6</u>	<u>TBD</u>

The test for measuring the receiver's  $\beta$  for each MCS is defined as follows:

TBD

*[Add the following entries to the end of table 353, section 11.3.1]*

*[Note: the correct table number should replace XXX]*

<a href="#">EESM Normalized C/N override for CC FEC</a>	<a href="#">ZZZ</a>	<a href="#">8</a>	<a href="#">This is a list of numbers, where each number is encoded by one byte, and interpreted as a signed value in units of 0.25. The bytes correspond in order to the list defined by table XXX, starting from the second line. The number encoded by each byte represents the difference in normalized C/N relative to the previous line in the table, for CC FEC.</a>
<a href="#">EESM <math>\beta</math> override for CC FEC</a>	<a href="#">ZZZ</a>	<a href="#">8</a>	<a href="#">This is a list of numbers, where each number is encoded by one byte, and interpreted as a signed value in units of 0.1. The bytes correspond in order to the list defined by table XXX, starting from the first line. The number encoded by each byte represents the value of <math>10\log_{10}(\beta)</math> for CC FEC.</a>
<a href="#">EESM Normalized C/N override for CTC FEC</a>	<a href="#">ZZZ</a>	<a href="#">8</a>	<a href="#">This is a list of numbers, where each number is encoded by one byte, and interpreted as a signed value in units of 0.25. The bytes correspond in order to the list defined by table XXX, starting from the second line. The number encoded by each byte represents the difference in normalized C/N relative to the previous line in the table, for CTC FEC.</a>
<a href="#">EESM <math>\beta</math> override for CTC FEC</a>	<a href="#">ZZZ</a>	<a href="#">8</a>	<a href="#">This is a list of numbers, where each number is encoded by one byte, and interpreted as a signed value in units of 0.1. The bytes correspond in order to the list defined by table XXX, starting from the first line. The number encoded by each byte represents the value of <math>10\log_{10}(\beta)</math> for CTC FEC.</a>

*[Add the following new section 11.8.3.7.X]*

[11.8.3.7.X Optional CINR measurement mode support](#)

[This field indicates the optional CINR measurement modes supported by a WirelessMAN-OFDMA PHY MSS. This field is not used for other PHY specifications. A bit value of 0 indicates “not supported” while 1 indicates “supported.”](#)

<a href="#">Type</a>	<a href="#">Length</a>	<a href="#">Value</a>	<a href="#">Scope</a>
<a href="#">XXX</a>	<a href="#">1</a>	<a href="#">Bit #0: EESM CINR measurement mode</a>	<a href="#">SBC-REQ (see 6.3.2.3.23)</a> <a href="#">SBC-RSP (see 6.3.2.3.24)</a>

=====

**6 [References](#)**

- [1] “Considerations on the System-Performance evaluation of HSDPA using OFDM modulation”, Ericsson, 3GPP TSG\_RAN WG1 #34, R1-030999, October, 2003.

- [2] “System-level evaluation of OFDM – further considerations”, Ericsson, 3GPP TSG\_RAN WG1 #35, R1-031303, November, 2003.
- [3] “OFDM EESM simulation Results for System-Level Performance Evaluations, and Text Proposal for Section A. 4.5 of TR 25.892”, Nortel Networks, R1-04-0089, January, 2004
- [4] “Feasibility Study for OFDM for UTRAN enhancement, Release 6”, 3GPP TSG RAN, TR 25.892 v1.1.0, March 2004.