

Project	IEEE 802.16 Broadband Wireless Access Working Group < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	Pilot Design for High-mobility Zone in 802.16m	
Date Submitted	2008-03-10	
Source(s)	Lai-Huei Wang, Jia-Hao Wu, Chao-Wang Huang, Chien-Yu Kao, Yu-Tao Hsieh, Pang-An Ting, Richard Li ITRI 195,Sec. 4, Chung Hsing Rd. Chutung, Hsinchu, Taiwan 310, R.O.C	Voice: + 886 3 5915642 E-mail: <a href="mailto:richard929@itri.org.tw">richard929@itri.org.tw</a>
	Jenming Wu, Yuan-Hao Huang NTHU	
Re:	IEEE 802.16m-08/005 - Call for Contributions on Project 802.16m System Description Document (SDD) shoot for "Pilot Structures as relevant to downlink MIMO"	
Abstract	A pilot allocation method to reduce the intercarrier interference effect for high-mobility conditions	
Purpose	To contribute the proposal of pilot design in high-mobility zone into the 802.16m SDD	
Notice	<i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.</i>	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy	The contributor is familiar with the IEEE-SA Patent Policy and Procedures: < <a href="http://standards.ieee.org/guides/bylaws/sect6-7.html#6">http://standards.ieee.org/guides/bylaws/sect6-7.html#6</a> > and < <a href="http://standards.ieee.org/guides/opman/sect6.html#6.3">http://standards.ieee.org/guides/opman/sect6.html#6.3</a> >. Further information is located at < <a href="http://standards.ieee.org/board/pat/pat-material.html">http://standards.ieee.org/board/pat/pat-material.html</a> > and < <a href="http://standards.ieee.org/board/pat">http://standards.ieee.org/board/pat</a> >.	

## Pilot Design for High-mobility Zone in 802.16m

*Lai-Huei Wang, Jia-Hao Wu, Chao-Wang Huang, Chien-Yu Kao,  
Yu-Tao Hsieh, Pang-An Ting, Richard Li*

*ITRI*

*Jenming Wu, Yuan-Hao Huang*

*NTHU*

### Introduction

For 802.16m, one of the targets aims at high-mobility application with a velocity up to 350km/hr. Under such a high-mobility environment, the inter-carrier interference (ICI) caused by Doppler spread is serious and may dominate the system performance for a large signal to noise power ratio (SNR). In 802.16e, the problem we address is that system performance, such as packet error rate (PER) or data throughput, will be bounded by the ICI even though in a high SNR circumstance. The idea is proposed in [1]. Following this work, we modified the cluster structure and increase some pilot density. For 802.16m, we want to eliminate the ICI effect to improve system performance.

There are many methods to reduce the ICI effect. Either use a high-complexity equalizer [2] or design a modulation scheme with the mechanism of ICI self cancellation [3]. The deficiency of the former is high complexity for ICI reduction while the deficiency of the latter is only half data efficiency remained. In the contribution, we want to design a pilot scheme for channel estimation to reduce the ICI effect without additional complexity. After getting the near ICI-free channel estimation with the proposed pilot scheme, we eliminate the ICI on data sub-carriers with successive ICI cancellation (SIC) [4]. In SIC, we need to detect data symbols and then feedback decision for the ICI cancellation. Rather than using a complex equalizer, we apply a one-tap equalizer and hard decision for data decision feedback to prevent from large number of computation in the coefficients of equalizers. For ordering of SIC, we do not need complicated ordering skills. Instead, we cancel the ICI caused by pilot sub-carriers first and then cancel the ICI caused by data sub-carriers successively by the order from the sub-carriers near pilots to those far away from pilots. In addition, we cancel the ICI with linear ICI channel model, i.e. assuming the channel variation is linear to further reduce the canceling computational complexity. Overall, the ICI cancellation can be implemented with very low complexity.

In [3], two adjacent sub-carriers are modulated to be an anti-polar pair. This proposal applies similar scheme onto pilot sub-carriers rather than all data sub-carriers. The proposed pilot scheme allows for not only better spectral efficiency but also prominent ICI self cancellation for channel estimation and then improve the performance of further ICI cancellation on data sub-carriers. Thus, in the contribution, we propose a new clustered pilot allocation scheme for the new high-mobility zone in 802.16m to improve the system performance. In the following, we will show that with this scheme, high-level modulation and coding schemes (MCS) can be feasible under velocities up to 350 km/hr for higher data throughput.

### Proposed pilot allocation for SISO in the high-mobility zone

Figure 1 shows the pilot location of one cluster in the downlink PUSC in 802.16e. In contrast with Figure 1, Figure 2 illustrates the proposed pilot location of one cluster in the new downlink high-mobility zone in 802.16m. In the proposal, the structure of one cluster is two symbols by 16 sub-carriers. Focusing on the

problem of ICI in a high-mobility application, we arrange the pilots to be adjacent two by two to improve the performance of channel estimation by the mechanism of ICI self cancellation. By modulating the two adjacent pilots anti-polar, we have the near ICI-free performance without canceling the ICI on each pilot. Later simulation results show that the accurate channel estimation will improve the performance of ICI cancellation on data sub-carriers significantly.

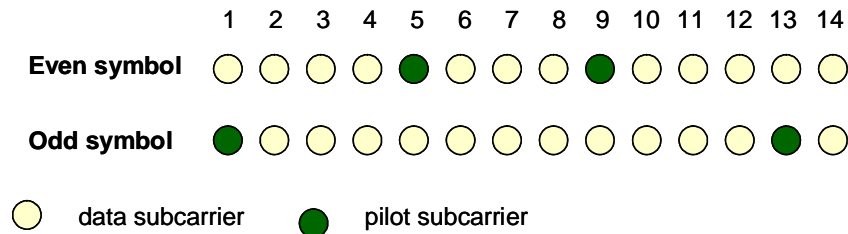


Figure 1. Cluster structure for downlink PUSC in 802.16e

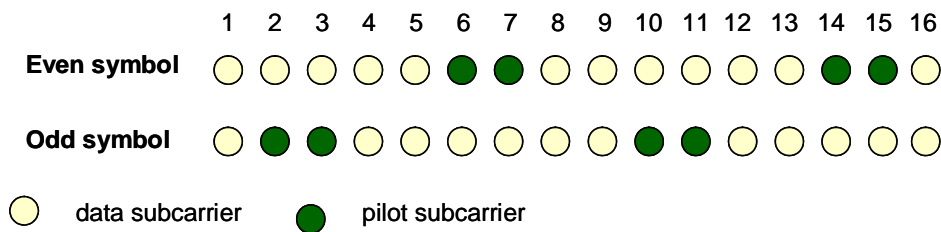


Figure 2. Proposed cluster structure for the high-speed zone in 802.16m

## Proposed pilot modulation in the high-mobility zone

In 802.16e, the power of pilot sub-carriers is boosted 2.5dB over that of data sub-carriers. In addition, both pilot and data sub-carriers are modulated/re-modulated by a Pseudo Random Binary Sequence (PRBS) with the polynomial  $x^{11} + x^9 + 1$ . In the proposal, however, we need the two adjacent pilots with an anti-polar phase to enable the mechanism of ICI self cancellation. Therefore, in the contribution, we modulate the pilots by the same strategy as in 802.16e except that the second pilots of each adjacent pair are modulated with negative value of the first ones.

## Simulation Results

In the simulations, we compare the PER and throughput performances of four schemes with different types of pilot allocation. The first is the scheme of the pilot allocation in 802.16e PUSC without ICI cancellation. The second is the scheme of the pilot allocation in 802.16e PUSC with single-iteration SIC. The linear ICI channel model is applied to reconstructing the ICI and a one-tap equalizer is utilized for hard decision to get the transmitted data symbols. Here, we notate the above ICI cancellation mechanism as “*one-tap SIC*.” The third is the scheme of the proposed pilot allocation with one-tap SIC. In order to compare the proposed clustered pilot scheme and the conventional equispaced pilot scheme, we create the same cluster structure with the same number of pilots as the proposed pilot scheme but the pilots are allocated in an equal distance as shown in Figure 3. Hence, the fourth is the scheme of the equal pilot allocation in Figure 3 with one-tap SIC. To sum up, the four compared schemes are as following:

Scheme 1: the pilot allocation in Figure 1 (802.16e PUSC) and no ICI cancellation

Scheme 2: the pilot allocation in Figure 1 (802.16e PUSC) and one-tap SIC

Scheme 3: the proposed pilot allocation in Figure 2 and one-tap SIC

Scheme 4: the equal pilot allocation in Figure 3 and one-tap SIC

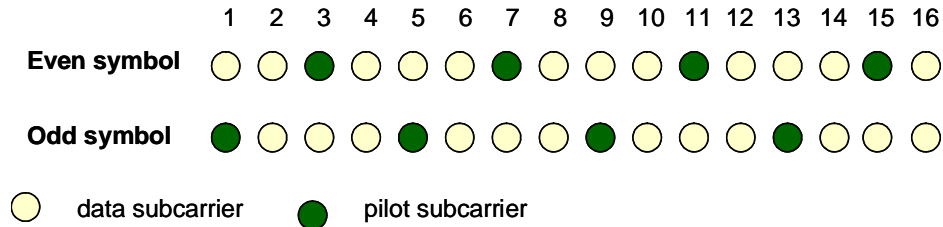


Figure 3. compared cluster structure for the high-speed zone in 802.16m

The simulation parameters are set as in Table 1. Moreover, in order to have the same number of clusters as 802.16e, we shorten the guard band for the proposed cluster structure by  $2 \times 60$  sub-carriers, i.e. the number of left and right guard sub-carriers becomes 32 and 31, respectively. In this way, the number of used sub-carriers in one OFDM symbol becomes 960 from 840. Taking it into account, we will normalize the data throughput with the proposed cluster structure by the factor of  $960/840$ .

Table 1. Simulation parameters

Carrier frequency	2.5GHz
Subcarrier spacing	10.94kHz
Channel model	ITU-VA (modified) + Jakes
FFT size (N)	1024
Guard Interval	$1024/8 = 128$
MS velocity	350 km/hr
Pilot power boosting	2.5 dB
Channel Coding	Convolutional Coding
Packet size	66 slots (22 symbols by 6 subchannels)
HARQ	Chase combining, maximum 4 retransmissions, 2-frame retransmission delay
ICI cancellation	$\pm 6$ subcarriers canceling range, single iteration, linear ICI channel model

Figure 4 shows the PER comparison among the four schemes under a velocity of 350 km/hr. If take PER of 0.1 as the *goal PER*, Scheme 1 can reach the goal PER only in the MCS of 16QAM 1/2 at a SNR of 21 dB. With ICI cancellation, Scheme 2 has a slight gain over Scheme 1 but also fail to reach the goal PER in the higher-level MCS of 64QAM 1/2. Therefore, we can see that the effect of ICI cancellation is not sufficient with the pilot allocation scheme in 802.16e PUSC. Next, with the proposed pilot scheme and cluster structure,

Scheme 3 can attain the goal PER even in 64QAM 2/3. By contrast, with the conventional equispaced pilot allocation, Scheme 4 can only be successful to reach the goal PER in 64QAM 1/2 at a SNR of 25 dB worse than Scheme 3 by one dB and fail to reach the goal PER in the higher-level MCS of 64QAM 2/3. Clearly, Scheme 3 with the proposed clustered pilot scheme can result in a much better performance against the ICI caused by heavy Doppler spread than the other three schemes.

Figure 5 shows the data throughput comparison among the four schemes under a velocity of 350 km/hr. Although the proposed pilot scheme leads to a higher pilot density, it also makes operation in higher-level MCS practical and thus results in higher data throughput for mobile users. For example, from Figure 5, in case of SNR equal to 30 dB, the max throughput for 802.16e PUSC with ICI cancellation (Scheme 2) is about 18Mbps in 64QAM 1/2 (but  $PER > 0.1$ ) while the max throughput for the proposed scheme can reach to about 22Mbps in 64QAM 2/3 ( $PER < 0.1$ ). That is, the proposed scheme can make a 22% enhancement of data throughput.

To sum up, the proposed pilot scheme not only improves the performance of PER but also lifts the data throughput. So, it can lead system to operation with high data throughput rather than just connection status in a high-mobility environment.

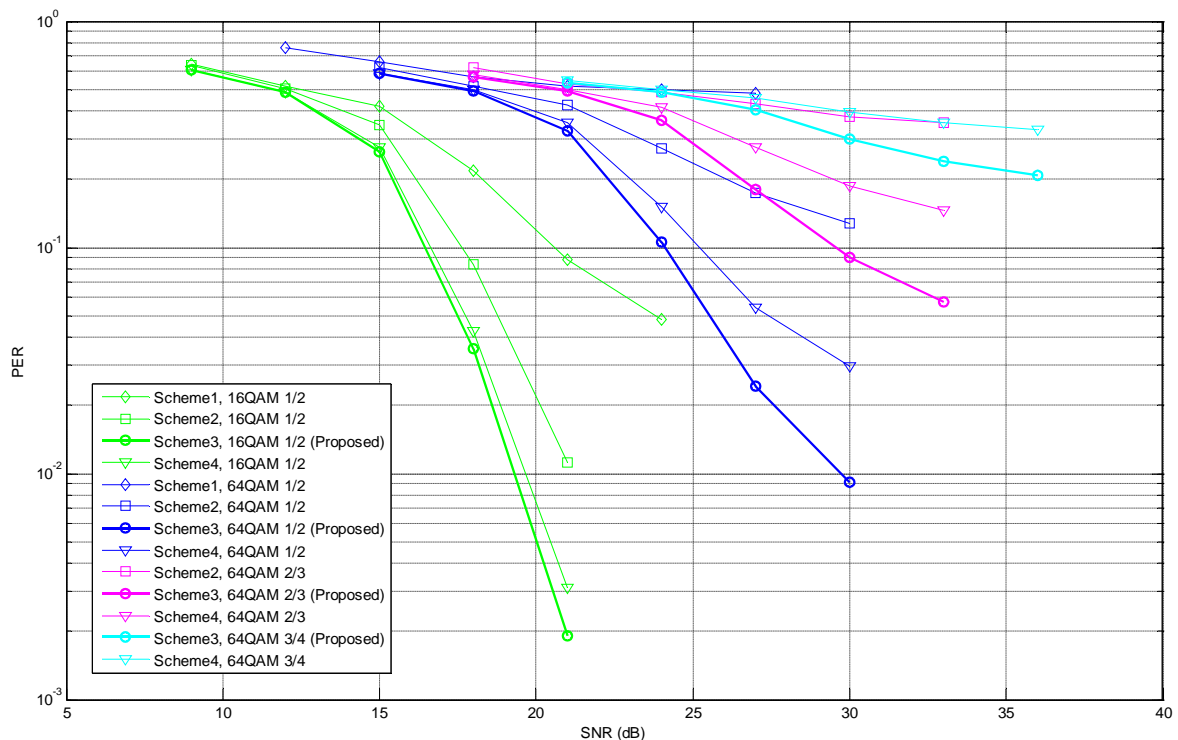


Figure 4. PER comparison for different schemes under a velocity of 350 km/hr

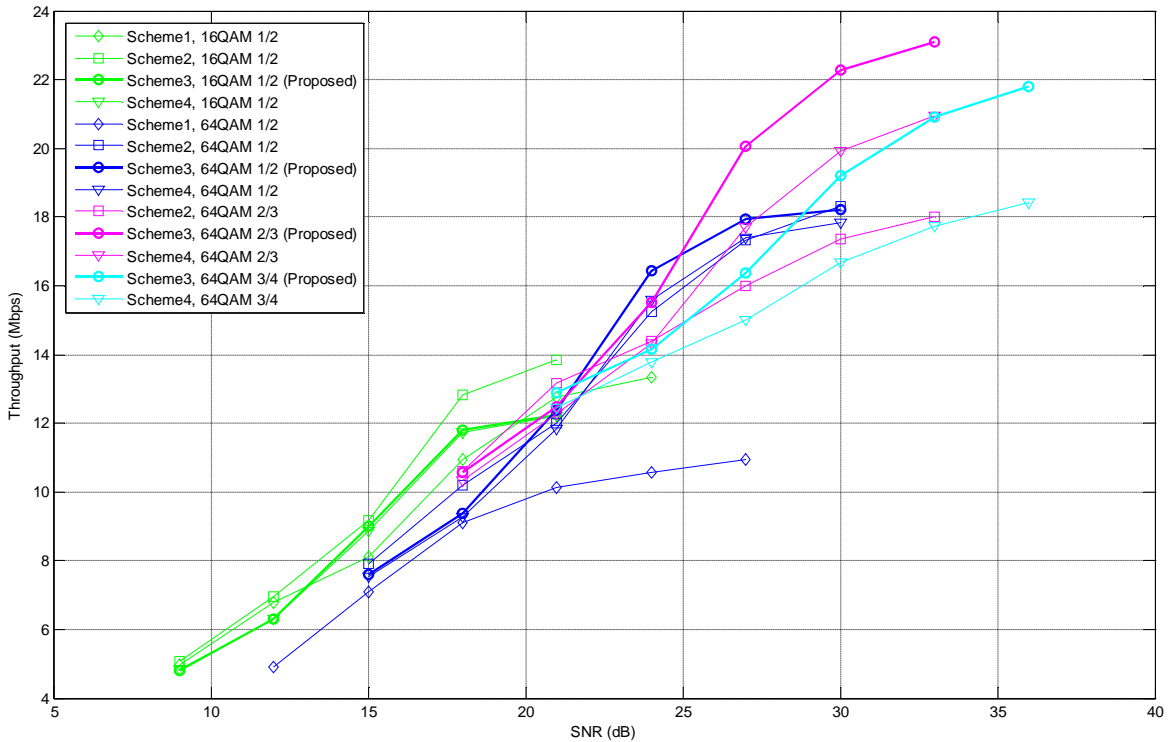


Figure 5. Throughput comparison for different schemes under a velocity of 350 km/hr

### Proposed SDD Text

[Chapter] Physical Layer

.....

[Section] Frame Structure

.....

[Subsection] High-mobility Zone

.....

[Subsection] Pilot allocation

The structure of one cluster is two symbols by 16 sub-carriers and the pilots are arranged adjacent two by two as shown in Figure XX. Moreover, the pilots are modulated by a PRBS with anti-polar phase.

[Other additions]

.....

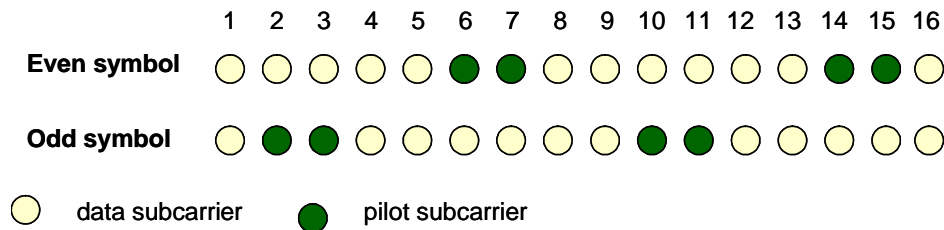


Figure XX. Proposed cluster structure for the high-speed zone in 802.16m

## Reference

- [1] IEEE C802.16m-07/296r1
- [2] X. Cai and G. B. Giannakis, "Bounding performance and suppressing intercarrier interference in wireless mobile OFDM," *IEEE Transactions on Communications*, vol. 51, no. 12, pp. 2047-2056, Dec. 2003
- [3] Y. Zhao and S. G. Haggman, "Inter-carrier interference self-cancellation scheme for OFDM mobile communication systems," *IEEE Transactions on Communications*, vol. 49, no. 7, pp. 1185-1191, July 2001
- [4] Y.S. Choi, P. J. Voltz, and F. A. Cassara, "On channel estimation and detection for multicarrier signals in fast and selective Rayleigh fading channels," *IEEE Transaction on Communications*, vol. 49, pp. 1375-1387, Aug. 2001.