

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Independent Rayleigh Faders Generator	
Date Submitted	2007-09-06	
Source(s)	Yih-Guang Jan, Yang-Han Lee, Jheng-Yao Lin, Ming-Hsueh Chuang, Hsien-Wei Tseng, and Chih-Wei Su	Voice: +886-2-2625-2303 E-mail: yihjan@yahoo.com yhlee@ee.tku.edu.tw
	Institute for Information Industry 7F., No. 218, Sec. 2, Dunhua S. Rd., Taipei City, Taiwan. Department of Electrical Engineering, Tamkang University 151 Ying-chuan Road, Tamsui, Taipei County, Taiwan 25137, R. O. C. [co-authors added here]	
Re:	IEEE 802.16m-07/080r3– Call for Comments on Draft 802.16m Evaluation Methodology Document	
Abstract	This document contains proposed text for the draft evaluation methodology for IEEE 802.16m technical proposals.	
Purpose	For discussion and approval by TGm	
Notice	<i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups.</i> It represents only the views of the participants listed in the “Source(s)” field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE’s name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE’s sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy	The contributor is familiar with the IEEE-SA Patent Policy and Procedures: < http://standards.ieee.org/guides/bylaws/sect6-7.html#6 > and < http://standards.ieee.org/guides/opman/sect6.html#6.3 >. Further information is located at < http://standards.ieee.org/board/pat/pat-material.html > and < http://standards.ieee.org/board/pat >.	

Independent Rayleigh Faders Generator

References:

- [1] Wu, Z., "Model of Independent Rayleigh Faders", *Electronics Letter*, 22nd, July 2004, Vol. 40, No. 15, pp. 949-951.
- [2] Jakes, W.C., *Microwave Mobile Communications*, Wiley, New York, 1974.
- [3] Li, Y., and Huang, X., "The Simulation of Independent Rayleigh Faders," *IEEE Trans. Commun.*, 2002, 50, pp. 1503-1514.
- [4] Dent P., Bottomley, G.E., and Croft, T., "Jakes Fading Model Revised," *Electronics Letter*, 24th, June, 1993, Vol. 29, No. 13, pp. 1162-1163.

Discussion

The ITU channel model is adopted as the baseline link channel model for the 802.16m system. This model is structured with tapped-delay-line (TDL) with properly defined multi-antenna correlation properties. This TDL model defines the number of communication paths, the time delay relative to the first tap, average power relative to the strongest tap and the Doppler spectrum of each tap. The Doppler spectrum has the classical Jakes spectrum as [2]:

$$S(f) = \begin{cases} \frac{1}{\pi f_d} \frac{1}{\sqrt{1 - (f - f_d)^2}}, & |f| < f_d \\ 0, & otherwise \end{cases} \quad (1)$$

where f_d is the Doppler frequency shift depending on the subscriber speed and the carrier frequency.

Many Rayleigh fading models have been developed in the realization of the Doppler spectrum (1) with certain number of equal-strength rays arriving at the moving vehicle with uniform distributed arriving angles. But the generated multiple fading waveforms are not uncorrelated [3, 4] but even they are uncorrelated their computations are rather complicated [4].

Lately Wu [1] proposed a Rayleigh fading model that the multiple fading waveform are independent and their computations are in the order of Jakes and Li and Huang's model [3]. The proposed model to generate M-independent Rayleigh fading waveforms has the following form:

$$T_k(t) = \sqrt{1/N_0} \sum_{n=1}^{N_0-1} (A_{k,1}(n) + jA_{k,2}(n)) [\cos(\omega_M \cos \alpha_{n,k} t + \theta_n)] \quad k = 0, 1, 2, \dots, M-1 \quad (2)$$

1 where

2 $\omega_M = \frac{v_m}{\lambda}$ is the maximum Doppler frequency shift for a mobile station moving with maximum velocity

3 v_m and λ is the wavelength corresponding to the frequency used to transmit the signal.

4 $N_0 = \frac{N}{8} = 4$, with usually N is selected as 32,

5 $\{\theta_n\}$: independent random phase sequences, each is uniformly distributed in $[0, 2\pi]$,

6 $n = 0, 1, 2, \dots, N_0 - 1$

7 $\{A_{k,p}\}$: different orthogonal weighting functions such as the Walsh-Hadamard sequences.

8 Or specifically, $A_{k,p}(n)$ is the k th orthogonal sequences in n (± 1 values), which satisfies

9

$$\frac{1}{N_0} \sum_{n=0}^{N_0-1} A_{kp}^*(n) A_{lq}(n) = \begin{cases} 1, & k=l, \quad p=q \\ 0, & \text{otherwise} \end{cases}$$

11

$$k = 0, 1, 2, \dots, M-1, p = 1, 2$$


12

$$\alpha_{n,k} = 2\pi \frac{n}{N} + 2\pi \frac{k}{MN}, \quad n = 0, 1, 2, \dots, N_0 - 1, \quad k = 0, 1, 2, \dots, M-1$$

14

15 Equation (1) can be implemented in the following functional block diagram,

16

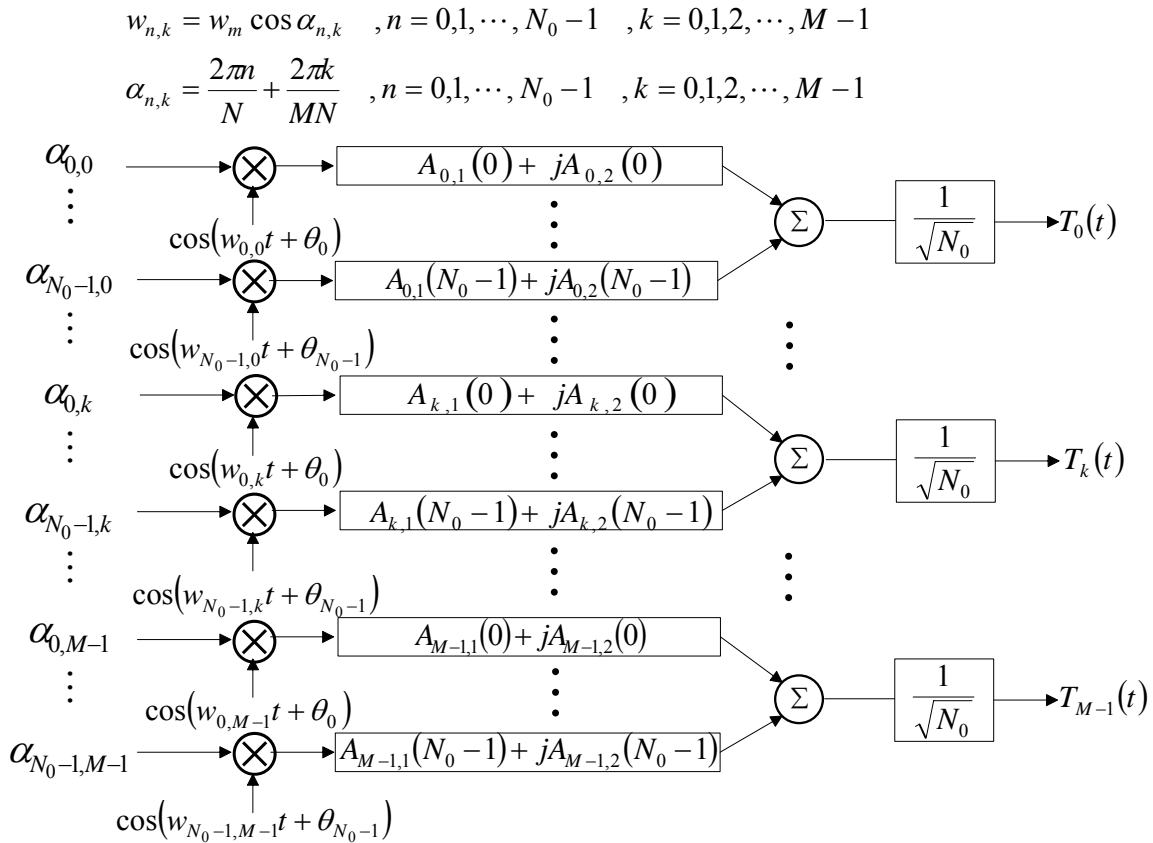

17