

Uplink Multiple Access and Design Considerations

IEEE 802.16 Presentation Submission Template (Rev. 9)

Document Number:

IEEE C802.16m-08/037r1, Uplink Multiple Access and Design Considerations

Date Submitted:

2008-01-21

Source:

Pantelis MONOGIOUDIS

Voice: + 1 973 386 4804

E-mail: monogiou@alcatel-lucent.com

*<http://standards.ieee.org/faqs/affiliationFAQ.html>>

Venue:

Base Contribution:

IEEE C802.16m-08/037, Uplink Multiple Access and Design Considerations

Purpose:

Input to 802.16m SDD.

Notice:

This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

Patent Policy:

The contributor is familiar with the IEEE-SA Patent Policy and Procedures:

<http://standards.ieee.org/guides/bylaws/sect6-7.html#6>> and <http://standards.ieee.org/guides/opman/sect6.html#6.3>>.

Further information is located at <http://standards.ieee.org/board/pat/pat-material.html>> and <http://standards.ieee.org/board/pat>>.

Summary

Overview of UL Design Principles

Precoded CDMA for PHY Signaling

Outer-cell Interference Control

Overview of Uplink 802.16m Radio Interface Design Principles

Baseline Design Principles


1. Regular PHY signaling (CQI, ACK, etc.) via **Localized Precoded-OFDMA**. Resources are persistently allocated.
 2. Event-based PHY signaling via frequency multiplexed **Localized Precoded-CDMA**. Dedicated resource allocation.
 3. Tight control of the other cell interference via transmit PSD control.
 - Special consideration of elastic to inelastic traffic interference at the cell edge
 - Rapid interference fluctuations at urban canyon environments (slow speeds but small decorrelation lengths).
 4. Trade Fractional Frequency Reuse (FFR) and Tx PSD update rate depending on the load in the RAN.
-

Overview of Uplink 802.16m Radio Interface Design Principles

Enhancements Design Principles

1. Overload (Superpose) resources using MU-MIMO.
 - Keep channel estimates clean of interference for superposition order of 2/4
2. Overload (Superpose) resources using codeword dimensions *per antenna* (*Layered Superposed OFDMA*).

Precoded-CDMA Waveform for PHY Signaling Multiplexing with OFDMA Traffic

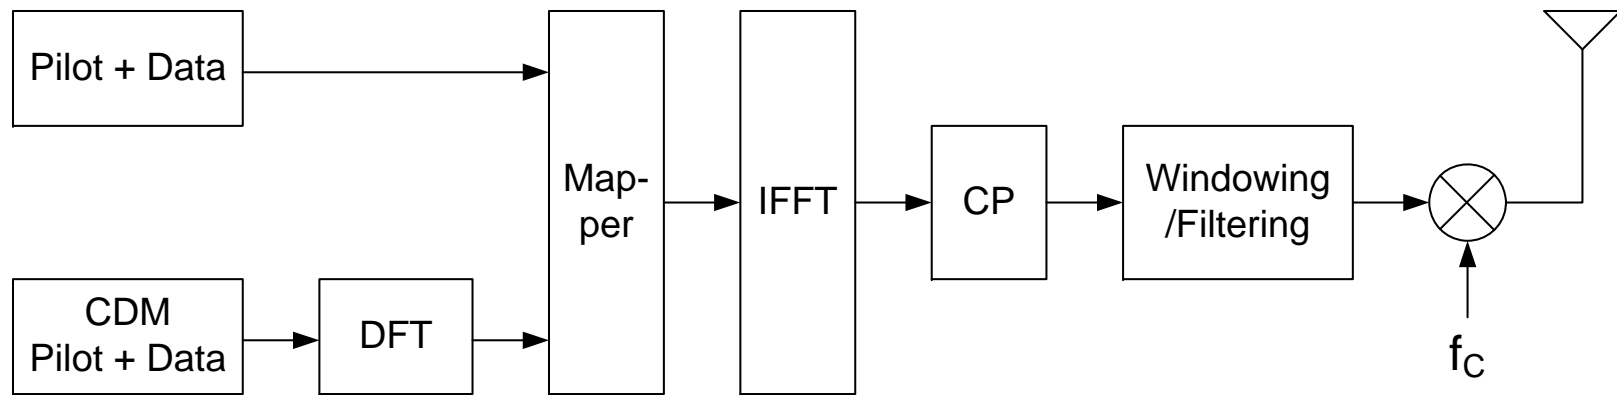


Introduction of **Frequency Zones** (in addition to Time Zones in 802.16e):

- OFDMA traffic tiles and Precoded CDMA signaling are frequency multiplexed. The Precoded CDMA occupies one or more frequency zones.
- The frequency resources allocated to CDMA are localized and hopped across the carrier bandwidth in subsequent interlaces.

Precoded CDMA signaling is periodically transmitted in a subset of the UL subframes.

PAPR of Localized Precoded CDMA

Zone of 64 localized sub-carriers in 512 FFT size



Single DFT precoder with one localized zone exhibits low PAPR as compared to multiple DFT precoders and distributed zones (at the expense of more elaborate receiver algorithms at the BS).

Power Control for Precoded-CDMA

CDMA pilot is always transmitted by all active users

- DTX Pilot when there is no signaling transmission, therefore,
- DTX of the complete transmission chain is possible benefiting battery life if no OFDMA data are present in that interlace.

Estimate CDMA pilot E_c/N_t and compare it to target E_c/N_t and send up down commands via the DL power control signaling channel.

Target E_c/N_t updates (outer loop) can run based on erasures of the block coded PHY signaling

Maintenance of fixed Precoded CDMA SIR target at the base station, allows to control the OFDMA Tx PSD depending on the relationship between the SIR of CDMA and required SIR of OFDMA traffic for the specific MCS.

Tight Interference Control in the OFDMA UL

