

Time-Domain CSI Feedback for MU-MIMO

IEEE 802.16 Presentation Submission Template (Rev. 9)

Document Number:

IEEE C802.16m-08/1439r1

Date Submitted:

2008-11-10

Source:

Wooram Shin, Choong Il Yeh, Young Seog Song,
Byung-Jae Kwak, Jihyung Kim, Min Sik Seo,
Dong Seung Kwon
ETRI
138, Gajeongno, Yuseong-gu, Daejeon, 305-700, Korea

E-mail: w.shin@etri.re.kr (Wooram Shin)
dskwon@etri.re.kr (Dong Seung Kwon)

Hyoungjin Choi

ibm686@tta.or.kr (Hyoungjin Choi)

TTA

267-2, Seohyeon-dong, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-824, Korea

Venue:

TGm SDD: Other; in response to the TGm Call for Contributions and Comments IEEE C802.16m-08/040 for Session 58

Base Contribution:

IEEE C802.16m-08/003r4

Purpose:

For discussion and approval by TGm

Notice:

This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

Patent Policy:

The contributor is familiar with the IEEE-SA Patent Policy and Procedures:

<<http://standards.ieee.org/guides/bylaws/sect6-7.html#6>> and <<http://standards.ieee.org/guides/opman/sect6.html#6.3>>.

Further information is located at <<http://standards.ieee.org/board/pat/pat-material.html>> and <<http://standards.ieee.org/board/pat>>.

Rationale

- CSI Feedback Schemes for MU-MIMO
 - Codebook-based feedback
 - Analog feedback
- Frequency-Domain CSI Feedback for Distributed MU-MIMO
 - Acquiring full-band CSI using simple MMSE interpolation
 - But, requiring the knowledge of the second-order statistics
 - Not good enough in performance
 - High computational complexity
 - Suboptimal due to neglecting the correlation at different subcarriers

Rationale (Cont'd)

- Frequency-Domain CSI Feedback for Short Multipath Delay
 - Not guaranteeing FSS gain or MU diversity gain from Best-M feedback schemes
 - Necessary to use the full-band CSI for exploiting MU diversity gain

Time-domain CSI feedback can resolve those problems.


Time-Domain CSI Feedback

- Feedback Information
 - Transmitting only time impulse response
 - Less or small overhead depending on multipath profile
 - Enabling to cover the whole channel bandwidth for distributed MU-MIMO
- Time-Domain Quantization Feedback
 - Training Stage
 - Measuring the multipath profile (i.e., delay profile and power profile)
 - Fining and Tracking Stage
 - Based on the measured or known multipath profile, quantizing the time impulse response on the sampled delay profile
 - Power profile used for efficiently quantizing the impulses on each delay to reduce feedback overhead

Lower Bound on Sum-Rate

- Simulation Parameters
 - Number of Tx antennas in BS: 4
 - Number of users with single antenna: 4
 - Number of subcarriers: 64
 - Multipath power profile: {0.5, 0.24, 0.17, 0.06, 0.03}
- Compared Schemes under ZFBF
 - Perfect CSIT
 - Analog feedback
 - Random vector quantization (RVQ) feedback
 - Time-domain quantization feedback
 - Limit, scalar uniform quantization, greedy bit allocation

Lower Bound on Sum-Rate

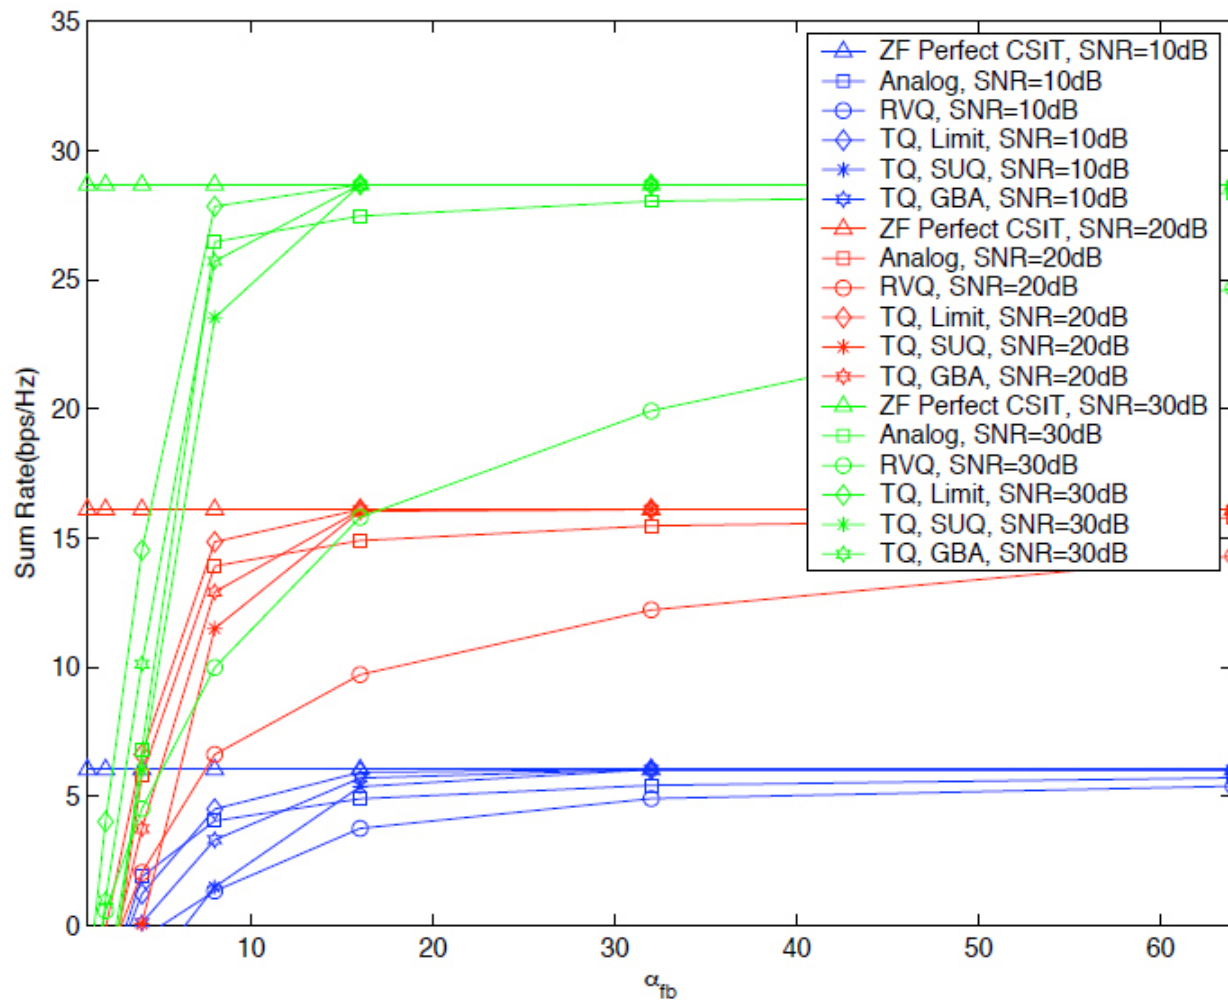

– Time-domain quantization feedback with greedy bit allocation shows the best performance.

Suggested Remedy

- *At line 9 in page 85, add the following sentence*
 - *Codebook-based feedback and analog feedback are performed in frequency-domain. As well, time-domain CSI feedback such as time-domain quantization feedback is also supported.*