

DTE POWER DEVICE
ELECTRICAL AND ENVIRONMENTAL SPECIFICATION

Terry Cobb
Avaya Communications

Abstract: This contribution contains typical electrical and environmental specification for a DTE power and PHY. With the exception of the common mode voltage and differential noise specifications, previously adopted, it is offered as the basis of discussion for the development of those requirements to be included in the DTE power Standard.

1 X. Electrical specifications

2
3 This Clause defines the electrical specifications for the DTE power device at the MDI. The
4 specifications shall apply at the cabling side of the MDI mated connection where power is supplied
5 and/or when specified the requirements shall apply only to the transmit and receive pairs at the
6 mated connection to the PHY. When specified as an operating condition the requirements shall
7 apply while transmitting data and/or when DTE power is applied to a TBD load.

8 X.1 Isolation

9
10 The DTE power device shall provide electrical isolation between the port device circuits, including
11 frame ground (if any) and all MDI leads. This electrical separation shall withstand at least one of
12 the following electrical strength tests:

- 13
14 a. 1500 V rms at 50-60 Hz for 60 s, applied as specified in Section 5.3.2 of IEC 60950: 1991.
15 b. 2250 Vdc for 60 s, applied as specified in Section 5.3.2 of IEC 60950: 1991.
16 c. A sequence of ten 2400 V impulses of alternating polarity, applied at intervals of not less than
17 1s. The shape of the impulses shall be 1.2/50 micro second (1.2 micro second virtual front time,
18 50 micro second virtual time or half value), as defined in IEC 60060.
19

20 There shall be no insulation breakdown, as defined in Section 5.3.2 of IEC 60950: 1991, during
21 the test. The resistance after the test shall be at least 2 mega-ohms, measured at 500 Vdc.
22

23 X.2 Fault tolerance

24
25 Each wire pair of the DTE power device shall, under all operating conditions, withstand without
26 damage the application of short circuits of any wire to any other wire within the 4-pair cable for an
27 indefinite period of time and shall resume normal operation after the short circuit(s) are removed.
28 The magnitude of the current through such a short circuit shall not exceed TBD ma.
29

30 Each wire pair shall withstand without damage a 1000V common-mode impulse applied at Ecm of
31 either polarity (as indicated in Figure X-1). The shape of the impulse shall be 0.3/50 us (300 ns
32 virtual front time, 50 us virtual time of half value), as defined in IEC 60060.
33

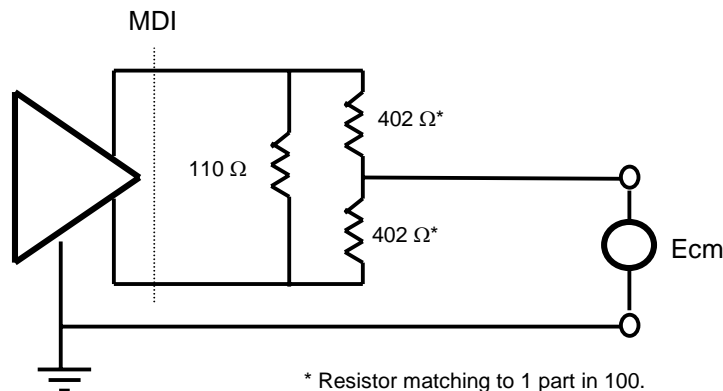


Figure X-1 MDI fault tolerance test circuit

1 X.3 Impedance balance

2
3 Impedance balance is a measurement of the common-mode-to-differential-mode impedance
4 balance of the MDI port. With DTE power applied the common-mode-to-differential-mode
5 impedance balance for the transmit and receive pairs shall not exceed,

$$7 \quad 29 - 171 \log_{10}(f / 10) \text{ dB from 2.0-20 MHz for a 10 Mbit/s PHY,}$$


$$9 \quad 34 - 19.2 \log_{10}(f / 50) \text{ dB from 1.0-100 MHz for a 100 Mbit/s or greater PHY,}$$

10
11 where f is the frequency in MHz.

12
13 The impedance balance is defined as

$$15 \quad 20 \log_{10}(E_{cm} / E_{dif})$$

16
17 where E_{cm} is an externally applied sine wave voltage as shown in Figure X-2 and E_{dif} is the
18 resulting waveform due only to the applied sine wave.

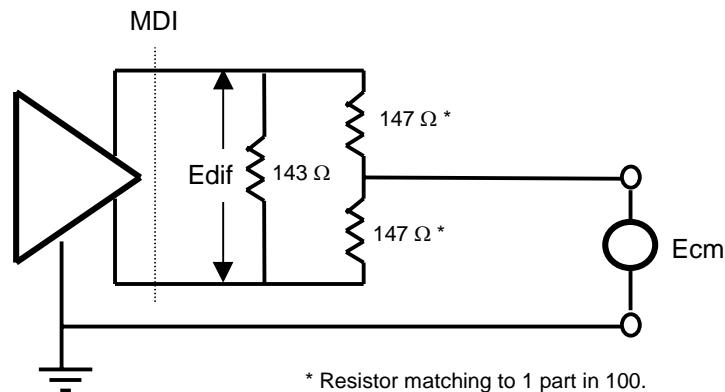

34 **Figure X-2 MDI impedance balance test circuit**

35
36 NOTE – The balance of the test equipment (such as the matching of the test resistors) must be insignificant
37 relative to the balance requirements.

39 X.4 Common-mode output voltage

40
41 The magnitude of the total common-mode output voltage measured according to Figure X-3 at the
42 transmit port while transmitting data and with DTE power applied, E_{cm_out} , shall not exceed 50
43 mV peak when operating at 10Mbit/s and 50 mV peak-to-peak when operating at 100Mbit/s or
44 greater. The magnitude of the common-mode AC voltage shall not exceed 50 mV peak-to-peak
45 measured at all other ports. The frequency of the measurement shall be from 0.15 MHz to 100
46 MHz.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20

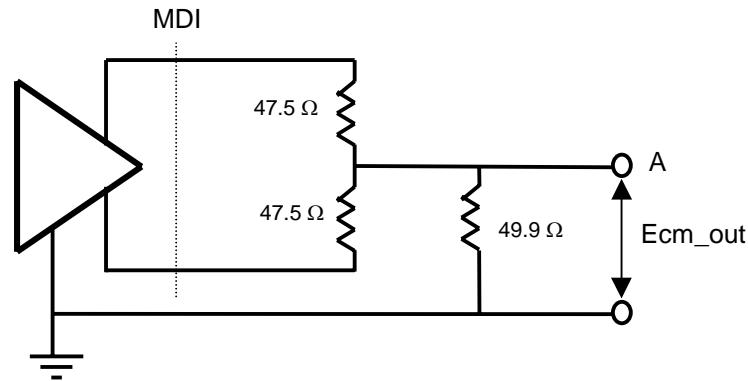


Figure X-3 Common-mode output voltage test

NOTE - The implementor should consider any applicable local, national, or international regulations which may require more stringent specifications. One such specification can be found in the European Standard EN 55022:1998.

21
22
23
24
25
26

X.5 Common to Common output voltage (TBD)

With DTE power applied the common (A in Figure X-3) to common differential AC voltage between the two DTE pairs that supply power shall not exceed 50 mV peak-to-peak. The frequency of the measurement shall be from 0.15 MHz to 100 MHz.

27
28
29
30
31

X.6 Differential noise voltage

The noise coupled from a operating DTE power source to the differential transmit and receive pairs shall not exceed 20 (TBD) mV peak-to-peak measured from 0.15 MHz to 100 MHz.

32
33
34
35
36
37
38
39

X.7 Return loss

The differential impedance at the transmit and receive pairs shall be such that any reflection due to differential signals incident upon the MDI from a balanced cabling having an impedance of 100 ohms is at least 15 dB below the incident signal, over the frequency range of 5 MHz to 10 MHz, for a 10 Mbit/s PHY; and shall be at least 16 dB from 1.0 MHz to 40 MHz and at least $10 - 20 \log_{10}(f / 80)$ dB from 40 MHz to 100MHz, for a 100Mbit/s or greater PHY.

40
41
42
43
44

X.8 Connector

The transmit and receive pairs when mated with a specified balanced cabling connection shall meet or exceed the electrical requirements for the defined category of connection as specified in ANSI/TIA/EIA-568-B.2.


1

2 X.9 Cable plant

3

4 The cable plant specification for 4-pair unshielded twisted-pair (UTP) cabling systems are
 5 described in ANSI/TIA/EIA-568-B and ISO/IEC 11801-2000. The primary application for spare pair
 6 power is expected to be in the telecommunications room. The maximum configuration for the
 7 telecommunication room consists of a full cross-connect consisting of two connectors, illustrated
 8 in Figure X-4.

9

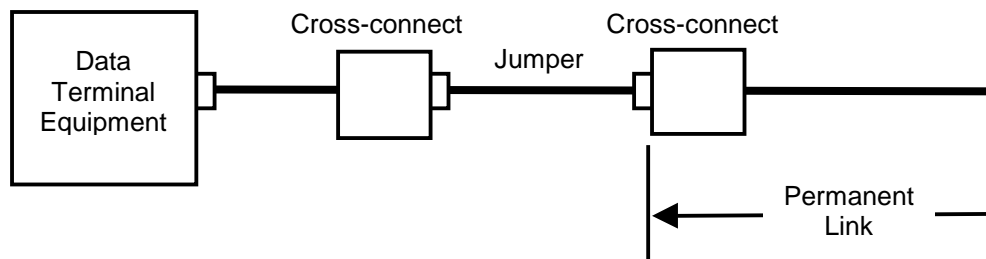

10

11

12

13

14

15

16

17

18

19

Figure X-4 Telecommunication room

20

21 Insertion of spare pair power may replace one of the cross-connects with a DTE power port or
 22 may replace the jumper cord with a cord that would include the DTE power device. Configurations
 23 with only one connection in the cross-connect could add an additional connection with the DTE
 24 power port.

25

26 The insertion of a DTE power device shall not increase the length of the Telecommunication room
 27 cabling plus the equipment cabling at the end of the channel beyond the specified 10 meters as
 28 defined in ANSI/TIA/EIA-568-B and ISO/IEC 11801-2000.

29

30 Applications that insert spare pair power outside the telecommunication room shall not alter the
 31 transmit and receive pair parameters, and shall meet the link requirements for the transmit and
 32 receive pairs with DTE power applied as specified in ANSI/TIA/EIA-568-B and ISO/IEC 11801-
 33 2000, and this Clause.

34

35 X.9.1 Cross-connector DTE power

36

37 Replacing one of the cross-connectors with a DTE power device or the addition of a connector
 38 when only one cross-connect exists is equivalent to one (1) mated connection. The DTE power
 39 device shall meet the requirements of ANSI/TIA/EIA-568-B.2 section 5, for the transmit and
 40 receive pairs, for the defined category of a connection.

41

42 X.9.2 Jumper cord DTE power

43

44 Replacing the existing jumper cord with a cord (or cords) with a DTE power device should not
 45 alter the requirements of a jumper cord. The transmit and receive pairs between the cross-
 46 connects shall meet the requirements of ANSI/TIA/EIA-568-B.2 section 6, for the defined category
 47 of a cross-connect jumper.

48

49

1 **Y. Environmental specifications**

2

3 **Y.1 General safety**

4

5 All equipment meeting this standard shall conform to IEC publication 950.

6 **Y.2 Network safety**

7

8 This clause sets forth a number of recommendations and guidelines related to safety concerns;
9 the list is neither complete nor does it address all possible safety issues. The designer is urged to
10 consult the relevant local, national, and international safety regulations to ensure compliance with
11 the appropriate requirements.

12
13 LAN cabling systems described in this clause are subject to at least four direct electrical safety
14 hazards during their installation and use. These hazards are as follows:

- 15
- 16 a) Direct contact between LAN components and power, lighting, or communications circuits.
 - 17 b) Static charge buildup on LAN cabling and components.
 - 18 c) High-energy transients coupled onto the LAN cabling system.
 - 19 d) Voltage potential differences between safety grounds to which various LAN components are
20 connected.

21

22 Such electrical safety hazards must be avoided or appropriately protected against for proper
23 network installation and performance. In addition to provisions for proper handling of these
24 conditions in an operational system, special measures must be taken to ensure that the intended
25 safety features are not negated during installation of a new network or during modification of an
26 existing network.

27

28 **Y.3 Installation**

29

30 It is a mandatory functional requirement that sound installation practice, as defined by applicable
31 local codes and regulations, be followed in every instance in which such practice is applicable.

32

33 **Y.4 Grounding**

34

35 Any safety grounding path for an externally connected DTE power device shall be provided
36 through the circuit ground of the MII connection.

37

38 It is assumed that the equipment to which the DTE power device is attached is properly grounded,
39 and not left floating nor serviced by a "doubly insulated, ac power distribution system". The use of
40 floating or insulated equipment, and the consequent implications for safety are beyond the scope
41 of this standard.

42

43 **Y.5 Installation and maintenance guidelines**

44

45 It is a mandatory functional requirement that, during installation of the cabling plant, care be taken
46 to ensure that non-insulated network cabling conductors do not make electrical contact with
47 unintended conductors or ground.

48

1 **Y.6 Telephony voltages**

2

3 The use of building wiring brings with it the possibility of wiring errors that may connect telephony
4 voltages to DTE equipment. Other than voice signals, the primary voltages that may be
5 encountered are the "battery" and ringing voltages. Although there is no universal standard. The
6 following maximums generally apply.

7

8 Battery voltage to a telephone line is generally 56 Vdc applied to the line through a balanced 400
9 Ω source impedance.

10

11 Ringing voltage is a composite signal consisting of an AC component and a DC component. The
12 ac component is up to 175 V peak at 20 Hz to 60Hz with a 100 Ω source resistance. The DC
13 component is 56 Vdc with 100-600 Ω source resistance. Large reactive transients can occur at the
14 start and end of each ring interval.

15

16 Application of any of the above voltage shall not result in any safety hazard.

17

18 **Y.7 Electromagnetic emissions**

19

20 The DTE powered cabling link shall comply with applicable local and national codes for the
21 limitation of electromagnetic interference.

22

23 **Y.8 Temperature and humidity**

24

25 The DTE powered link is expected to operate over a reasonable range of environmental
26 conditions related to temperature, humidity, and physical handling. Specific requirements and
27 values for these parameters are considered to be beyond the scope of this standard.

28

29 **Y.9 Labeling**

30

31 It is recommended that the DTE power device (and supporting documentation) be labeled in a
32 manner visible to the user with at least the following parameters:

33

- 34 a) Power level in terms of maximum current drain.
- 35 b) Port type (i.e. 100Base-TX, TIA Category or ISO Class)
- 36 c) Any applicable safety warnings

37

38