

Extended reach 40Gb Optical Ethernet

Call For Interest

Pete Anslow, Ciena
Matt Traverso, Cisco
Jon Anderson, Opnext

Hawaii, March 2012

Objective for this meeting

- To measure the interest in expanding the scope of the *Next Generation 100Gb Optical Ethernet* study group to include extended reach 40GbE
- We don't need to
 - Fully explore the problem
 - Debate strengths and weaknesses of solutions
 - Choose any one solution
 - Create PAR or five criteria
 - Create a standard or specification
- Anyone in the room may speak / vote
- RESPECT... give it, get it

Motivation of this Presentation

40Gb/s Ethernet is being applied to an increasing variety of applications, some of which require a longer reach than the 10km provided by 40GBASE-LR4. This Call for Interest will measure the interest in the formation of a study group (or expansion of an existing study group) to explore the market need and solutions for extended reach 40Gb/s Ethernet interfaces.

Contributors and Supporters

Ghani Abbas, Ericsson

Jon Anderson, Opnext

Pete Anslow, Ciena

Ralf-Peter Braun, Deutsche Telecom

Martin Carroll, Verizon

Frank Chang, Vitesse

Kevin Cheng, Gtran

Chris Cole, Finisar

Kai Cui, Huawei

Mike Dudek, QLogic

Mark Gustlin, Xilinx

Marek Hajduczenia, ZTE

Osamu Ishida, NTT

Jonathan King, Finisar

Satoshi Kodama, NTT

Ryan Latchman, Mindspeed

Jeffery Maki , Juniper

Osa Mok, Innolight

Gary Nicholl, Cisco

Rick Rabinovich, Alcatel-Lucent

Sam Sambasivan, AT&T

Kapil Shrikhande, Dell

Peter Stassar, Huawei

Katsuhisa Tawa, Sumitomo Electric

Matt Traverso, Cisco

Steve Trowbridge, Alcatel-Lucent

Eddie Tsumura, Sumitomo Electric

Lei Wang, China Mobile

Chengbin Wu, ZTE

Agenda

- Market need
- Technical feasibility
- Why now?
- Questions
- Straw polls



Market need

Matt Traverso, Cisco

Need for a 40km 40GBASE-R interface


- Networking need/application exists
 - 10GBASE-En – established market
 - 100GBASE-ER4 – emerging market
- For 40G connectivity at >10km limited options
 - DWDM optical transport solution: COST + Infrastructure + Low Density
 - Industry developing solutions like those in the technical feasibility section

The 40km Application space exists (1)

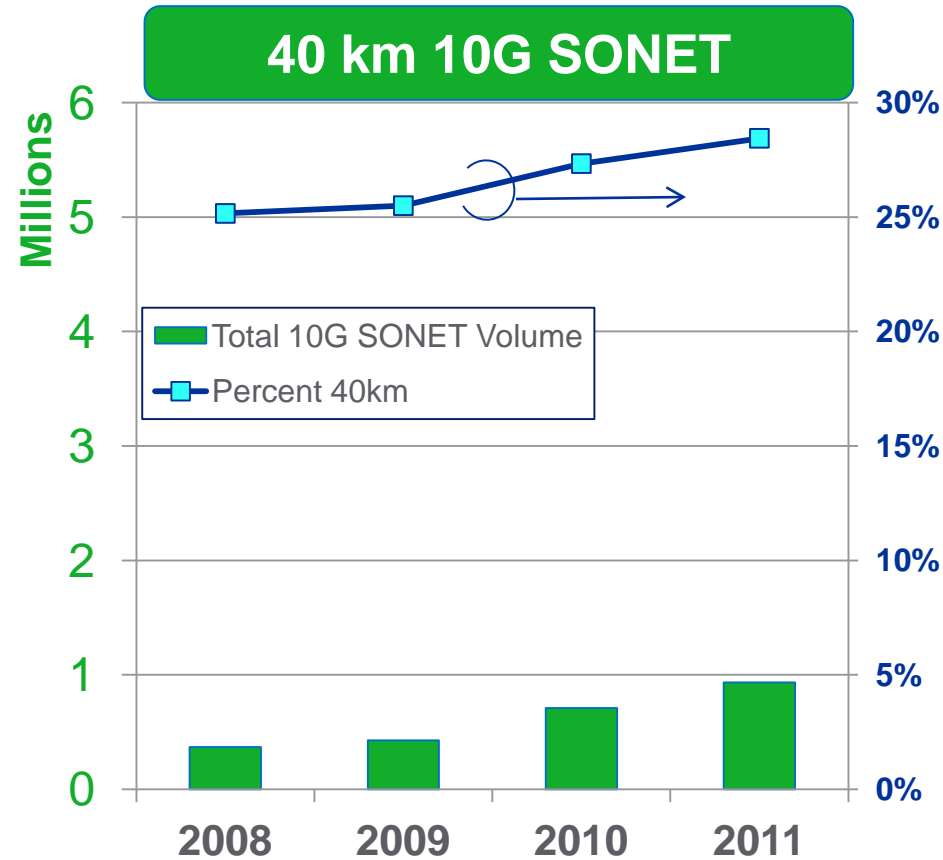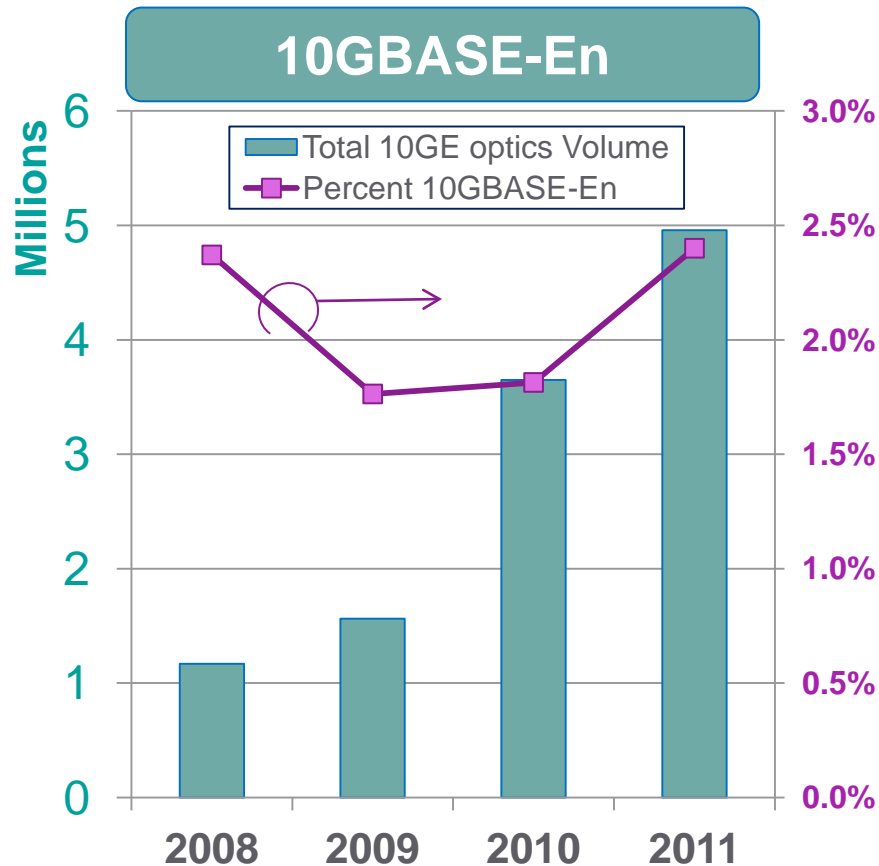

- 10GBASE-En has been a successful Ethernet interface
- Traditional telecom applications using SONET deploy a larger percentage of 40 km links, and a slightly higher absolute value



The 40km Application space exists (2)

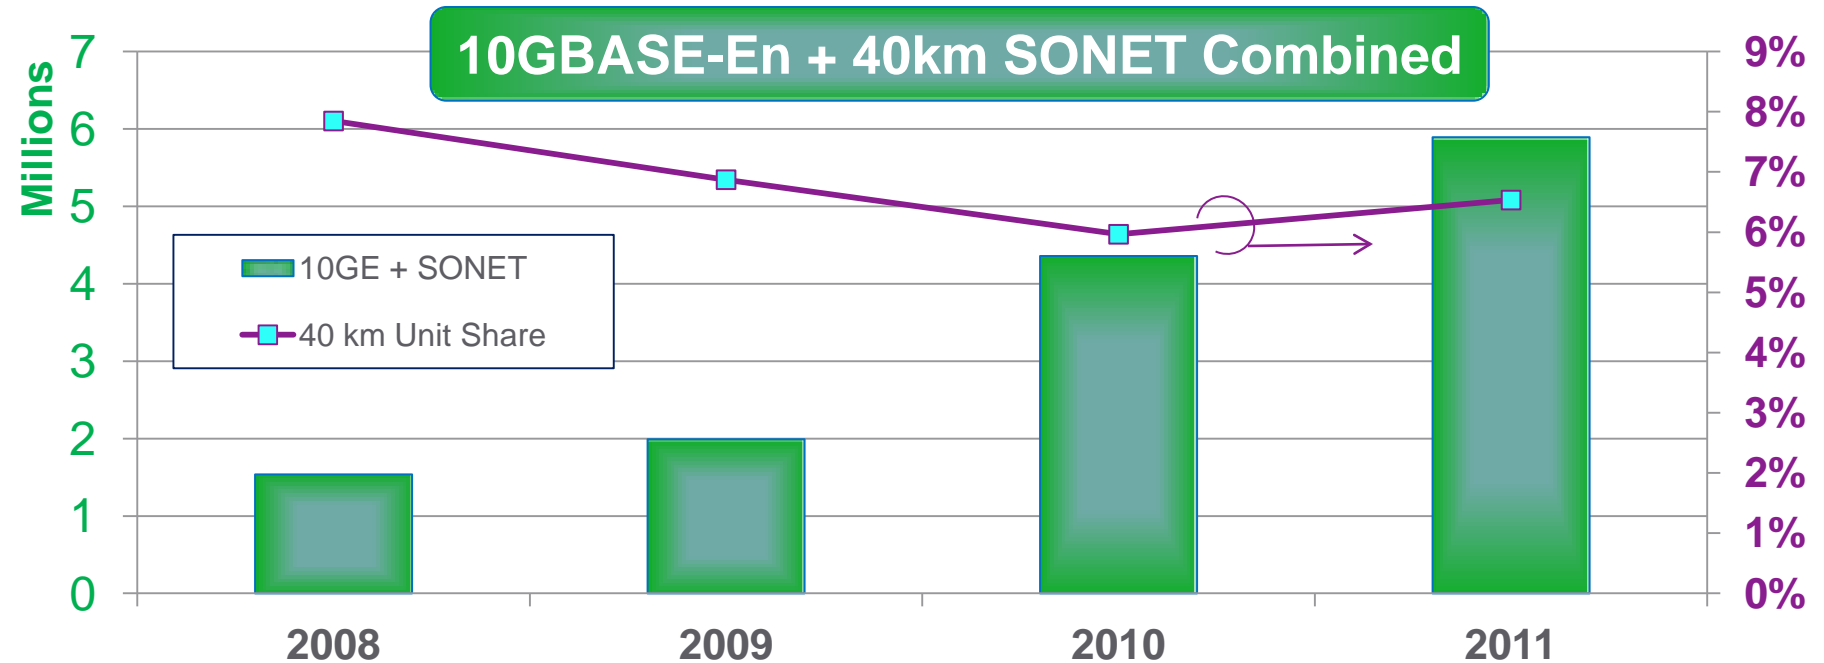

- At 40G rate, there is no established telecom 40 km point to point link
- Establishment of a 40GBASE-E PMD would address an existing application space for networking gear

Note: Data sourced from LightCounting Dec'11 Report

A 40km 40GBASE standard can simplify networks



Existing Solution – bulky & costly

- Requires sophisticated user base
- Requires additional equipment
- Optimized for '00s to '000s of km

Proposed Solution – simple...

- New PMD only
- Lack of point to point definition in telecom allows for additional Ethernet application

Technical feasibility

Jon Anderson, Opnext

Possible approach

- 10GBASE-ER in SFP+ form factor is available today from several suppliers. Optics typically employed are 1550nm EA-DFB and PIN-PD.
- Desirable to leverage 1300nm CWDM optics solutions developed for 40GBASE-LR4/C4S1-2D1 applications:
 - Available today from several suppliers;
 - Compatible for interoperability with 40GBASE-LR4 PMD;
 - Reduces ER4 cost by economies of scale.

Power budget considerations

- For achieving 40km operating distance on SMF:
 - Cable optical fiber attenuation in 1300nm range is (0.47dB/km) 18.8dB plus a couple dB for connector and splice loss; may need to consider “engineered link” with improved insertion loss;
 - Transmitter and dispersion penalty in 1300nm region is expected to be the same or similar to 40GBASE-LR4;
 - Overall, channel IL is about 12dB greater than channel IL in 40GBASE-LR4 link budget, which cannot be made up by only increased tx output power.
- Consider use of 10G APD:
 - Available today from several suppliers;
 - Rx sensitivity (OMA) typically -21dBm in 1550nm range;
 - Expect ~ 2dB responsivity degraded performance when operated in 1300nm range;
 - Overall, expect Rx sensitivity (OMA) to be in -18/-19dBm range

Possible link budgets


- Possible link budgets assuming 40km reach and 1300 nm operation are shown below:

	40GBASE-LR4	Vendor a 40GBASE-ER4		Vendor b 40GBASE-ER4	Vendor c 40GBASE-ER4	
Power budget (for max TDP)	9.3	20.6		22.3		
Operating distance	10	30	40	40	30	40
Maximum fiber loss per km	0.47	0.47	0.4		0.47	0.4
Optical connector loss	2	2	2			2
Channel insertion loss max	6.7	16	18	18.8		18
Channel insertion loss min	0	5.1		0	5.1	
Maximum discrete reflectance	-26	-26	-26	-26	-26	
Allocation for penalties (for max TDP)	2.6	2.6	2.6	3.5		
Additional insertion loss allowed	0	2	0			0


4x10G 40km module - example at nominal condition

Optical waveform (10.3Gb/s)


1271nm




1291nm



1311nm



1331nm







~7dB extinction ratio

Source: Sumitomo Electric

BER curve

(10.3Gb/s, B-to-B / 50kmSMF)

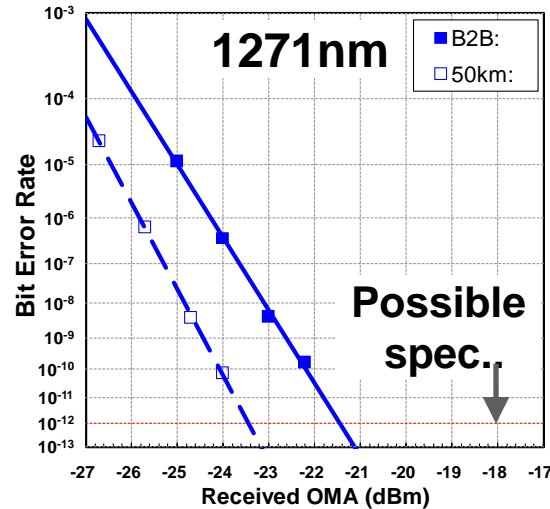

4x10G 40km module - receiver sensitivity deviation

Normalized module receiver sensitivity (Temperature dependency)

	Tc=0°C	Tc=35°C	Tc=70°C
Normalized receiver sensitivity (OMA, B-to-B) (dBm)	-0.5	0 (nominal)	+1.0

Normalized module receiver sensitivity (Extinction ratio dependency)

	ER 5dB	ER 6dB	ER 7dB
Normalized receiver sensitivity (OMA, B-to-B) (dBm)	+0.5	0 (nominal)	-0.5

Normalized module receiver sensitivity (Data rate dependency)

	10.3Gb/s	10.75Gb/s	11.15Gb/s
Normalized receiver sensitivity (OMA, B-to-B) (dBm)	0 (nominal)	0.5	0.8

Source: Sumitomo Electric

Why now?

Why now?

- 40Gb/s Ethernet is being applied to a broader range of applications than server interconnect.
- There is a market demand for 40GbE reach greater than 10km.
- If a standard for extended reach 40GbE is not developed soon, then multiple incompatible proprietary solutions may emerge.
- Additional 100GbE optical PMDs are being studied now in the Next Generation 100Gb/s Optical Ethernet study group, so in order to avoid splitting the available resource it seems better to add consideration of additional 40GbE interfaces to this effort.

Straw poll – 100G Next Gen Optical Ethernet SG

- Atlanta, 10 November 2011

Straw Poll #4

I would support the study of an extended reach (> 10km)
40GBASE-R PMD (such as 40GBASE-ER4) within this study group

Yes 45

No 0

Abstain 10

Questions?

Straw polls

Straw polls - CFI

- Should the scope of the “Next Generation 100Gb/s Optical Ethernet” study group be expanded to include 40GbE?

Y_37__ N_0__

Straw polls - Participation

- Number of CFI Attendees

Number __52__

- I would participate in 40G discussion within an expanded version of the Next Generation 100Gb/s Optical Ethernet Study Group in IEEE 802.3.

Number __30__

- My company would support participation in 40G discussion within an expanded version of the Next Generation 100GbE Optical Interfaces Study Group in IEEE 802.3.

Number __26__

Thanks!