

1
2 ADDITIONAL GUIDELINES FOR 4-PAIR 100 Ω CATEGORY 6
3 CABLING FOR 10GBASE-T APPLICATIONS
4

5 **TABLE OF CONTENTS**

6 1 INTRODUCTION1
7 2 PURPOSE AND SCOPE1
8 3 NORMATIVE REFERENCES.....1
9 4 DEFINITIONS, ACRONYMS & ABBREVIATIONS.....1
10 4.1 Definitions1
11 4.2 Acronyms and abbreviations2
12 5 TEST CONFIGURATIONS2
13 5.1 Cabling channel and permanent link test configurations2
14 5.2 Alien Crosstalk test configurations (ffs)3
15 6 TRANSMISSION PARAMETERS.....3
16 6.1 Insertion Loss3
17 6.1.1 Cabling insertion loss 3
18 6.1.1.1 Channel Insertion Loss 3
19 6.1.1.2 Permanent Link Insertion Loss 4
20 6.1.3 Insertion Loss Scaling..... 4
21 6.1.4 Insertion Loss of a Category 6 channel of 55 meters 4
22 6.1.5 Insertion Loss of a Category 6 permanent link of (TBD meters) 4
23 6.2 NEXT loss4
24 6.2.1 Cabling Pair-to-pair NEXT loss..... 5
25 6.2.1.1 Pair-to-pair NEXT Loss Channel 5
26 6.2.1.2 Pair-to-pair NEXT Loss Permanent Link 5
27 6.2.2 Power sum NEXT loss 5
28 6.2.2.1 Cabling power sum NEXT loss 5
29 6.2.2.1.1 PSNEXT Loss Channel 5
30 6.2.2.1.2 PSNEXT Loss Permanent Link..... 6
31 6.3 ELFEXT and FEXT loss.....6
32 6.3.1 Cabling pair-to-pair ELFEXT..... 6
33 6.3.1.1 Pair-to-pair ELFEXT Channel..... 6
34 6.3.1.2 Pair-to-pair ELFEXT Permanent Link 6
35 6.3.2 Power sum ELFEXT..... 6
36 6.3.2.1 Cabling power sum ELFEXT 7
37 6.3.2.1.1 Power sum ELFEXT Channel..... 7
38 6.3.2.1.2 Power sum ELFEXT Permanent Link..... 7

1	6.4 Alien NEXT loss.....	7
2	6.4.1 Pair-to-pair ANEXT loss (ffs)	7
3	6.4.1.1 Cabling pair-to-pair ANEXT loss.....	7
4	6.4.1.1.1 ANEXT Channel Equation	7
5	6.4.1.1.2 ANEXT Permanent Link Equation	7
6	6.4.2 Power sum Alien NEXT loss	7
7	6.5 Alien FEXT and Alien ELFEXT loss (ffs)	8
8	6.6 Return Loss.....	8
9	6.6.1 Cabling Return Loss.....	8
10	6.6.1.1 Channel return loss.....	8
11	6.6.1.2 Permanent link return loss	9
12	6.7 Propagation delay/delay skew	9
13	6.7.1 Cabling propagation delay	9
14	6.7.2 Cabling propagation delay skew	9
15	Annex A Cabling (field) measurement procedures (TBD).....	10
16	Annex B Test instruments	10
17	Annex C Alien Crosstalk Mitigation (ffs).....	12

18
19
20
21

LIST OF FIGURES

22	Figure 1.....	3
23	Figure 2.....	3

24
25
26
27

LIST OF TABLES

28	Table 1 Category 6 channel return loss	9
29	Table 2 Category 6 permanent link return loss	9
30	Table 3 Level IIIe field tester accuracy performance	10
31	Table 4 Explanation of Notes for Level IIIe specifications.....	11

1
2
3
4
5 **FOREWORD**
6
7
8

9 (This foreword is not part of the Telecommunications Systems Bulletin)
10

11
12 At the request of the Institute of Electrical and Electronics Engineers (IEEE) 802.3 Working
13 Group, TIA agreed to create additional guidelines for 4-pair 100 Ω Category 6 Cabling for
14 10GBASE-T Applications. The project was assigned to TR-42.7 under Engineering Committee
15 TR-42. The TR-42.7 Sub-Committee cooperated with several groups related to this activity.
16

- 17 a) TR-42.1 – Commercial Building Telecommunications Cabling Sub-Committee
18
19 b) TR-42.7.1 – Copper Connectors Working Group
20
21 c) TR-42.7.2 – Copper Cable Working Group
22

23 TIA standards documents are developed within the Technical Committees of the TIA and the
24 standards coordinating committees of the TIA standards board. Members of the committees
25 serve voluntarily and without commission. The companies that they represent are not
26 necessarily members of the TIA. The standards developed within the TIA represent a consensus
27 of the broad expertise on the subject. This expertise comes from within the TIA as well as those
28 outside of the TIA that have an expressed interest. The viewpoint expressed at the time that this
29 standard was approved was from the contributors' experience and the state of the art at that time.
30 Users are encouraged to verify that they have the latest revision of the standard.
31

32 This telecommunications bulletin has been prepared by the TR-42.7 Subcommittee and approved
33 by the Technical Committee TR-42.
34

35 There are three annexes in this TSB. Annexes A, B, and C,....

1 **1 INTRODUCTION**

2 The guidelines of this Telecommunications Systems Bulletin contain additional recommendations
3 for a minimally compliant category 6 cabling system. These recommendations are intended to
4 further characterize the existing category 6 cabling plant for 10GBASE-T applications.
5

6 This Telecommunications Systems Bulletin includes field test procedures that can be used to
7 verify if the installed cabling will meet these new guidelines.

8 *NOTE - The terms "guidelines" and "recommendations" are used interchangeably within*
9 *this Telecommunications Systems Bulletin.*

10 **2 PURPOSE AND SCOPE**

11 This Telecommunications Systems Bulletin describes additional guidelines for 100 Ω, 4-pair
12 category 6 cabling that have been installed in accordance with TIA/EIA-568-B.2.-1. These
13 guidelines are intended to provide additional information on the extended frequency transmission
14 performance of category 6 cabling from 250 MHz up to 625 MHz. It also describes the crosstalk
15 coupling between adjacent 4-pair category 6 cabling channels referred to as alien crosstalk and
16 provides additional guidelines for field test equipment and field test methods and alien crosstalk
17 mitigation.
18

19 The transmission recommendations included herein are applicable to 100 Ω 4-pair category 6
20 cabling specified in TIA/EIA-568-B.-1 and corresponding addenda. Compliance with this guideline
21 does not imply compatibility with cabling having nominal impedance values other than 100 Ω.

22 **3 NORMATIVE REFERENCES**

23 The following standards are referenced in this text. At the time of publication, the editions
24 indicated were valid. All standards are subject to revision; parties to agreements based on this
25 TSB are encouraged to investigate the possibility of applying the most recent editions of the
26 standards indicated. ANSI and TIA maintain registers of currently valid national standards
27 published by them.
28

29 ANSI/TIA/EIA-568-B.1, *Commercial Building Telecommunications Standard Part 1: General*
30 *Requirements*

31 ANSI/TIA/EIA-568-B.2, *Commercial Building Telecommunications Standard Part 2: 100 Ohm*
32 *Balanced Twisted-pair Cabling Standard*

33 ANSI/TIA/EIA-568-B.2-1, *Transmission Performance Specifications for 4 Pair 100 Ohm Category*
34 *6 Cabling*

37 **4 DEFINITIONS, ACRONYMS & ABBREVIATIONS**

38 **4.1 Definitions**

39 The generic definitions in this section have been formulated for use by the entire family of
40 telecommunications infrastructure standards. As such, the definitions do not contain mandatory
41 requirements of the Standard. Specific requirements are found in the normative sections of this
42 Standard.
43

44 **Alien crosstalk:** A measure of the unwanted signal coupling between adjacent cabling or
45 components **(forward to Definitions Group)**.

46
47 **Alien near-end crosstalk loss:** A measure of the unwanted signal coupling between pairs in
48 adjacent cabling from transmitters at the near-end into a pair measured at the near-end **(forward**
49 **to Definitions Group)**.

50

1 **Power sum alien near-end crosstalk loss:** A computation of the unwanted signal coupling
 2 between pairs in adjacent cabling from multiple transmitters at the near-end into a pair measured
 3 at the near-end (forward to Definitions Group).

4
 5 **Alien far-end crosstalk(ffs):** A measure of the unwanted signal coupling between pairs in
 6 adjacent cabling from a transmitter at the near-end into a pair measured at the far-end (forward to
 7 Definitions Group).

8
 9 **Power sum Alien far-end crosstalk(ffs):** A computation of the unwanted signal coupling
 10 between pairs in adjacent cabling from multiple transmitters at the near-end into another pair
 11 measured at the far-end. (forward to Definitions Group).

12
 13 **Power sum alien equal level far-end crosstalk(ffs):** A computation of the unwanted signal
 14 coupling between pairs in adjacent cabling from multiple transmitters at the near-end into another
 15 pair measured at the far-end, and relative to the received signal level (forward to Definitions
 16 Group).

17 **4.2 Acronyms and abbreviations**

- 18 ANEXT Alien Near-end Crosstalk (forward to Definitions Group)
 19 PSANEXT Power sum near-end crosstalk (forward to Definitions Group)
 20 AFEXT (ffs) Alien Far-end Crosstalk (forward to Definitions Group)
 21 PSAFEXT (ffs) Power sum near-end crosstalk (forward to Definitions Group)
 22 PSAELFEXT (ffs) Power sum alien equal level crosstalk (forward to Definitions Group)

23 **5 TEST CONFIGURATIONS**

24 **5.1 Cabling channel and permanent link test configurations**

25 The channel test configuration is used by system designers and users of data communications
 26 systems to verify the performance of the overall channel. The channel includes up to 90 m
 27 (295 ft) of horizontal cable, a work area equipment cord, a telecommunications outlet/connector,
 28 an optional transition/consolidation connector, and two connections in the telecommunications
 29 room. The total length of equipment cords, patch cords or jumpers and work area cords shall not
 30 exceed 10 m (33 ft). The channel configuration excludes the connections to the equipment at
 31 each end of the channel. The channel definition does not apply to those cases where the
 32 horizontal cabling is cross-connected to the backbone cabling. A schematic representation of the
 33 channel test configuration is illustrated in figure 1.

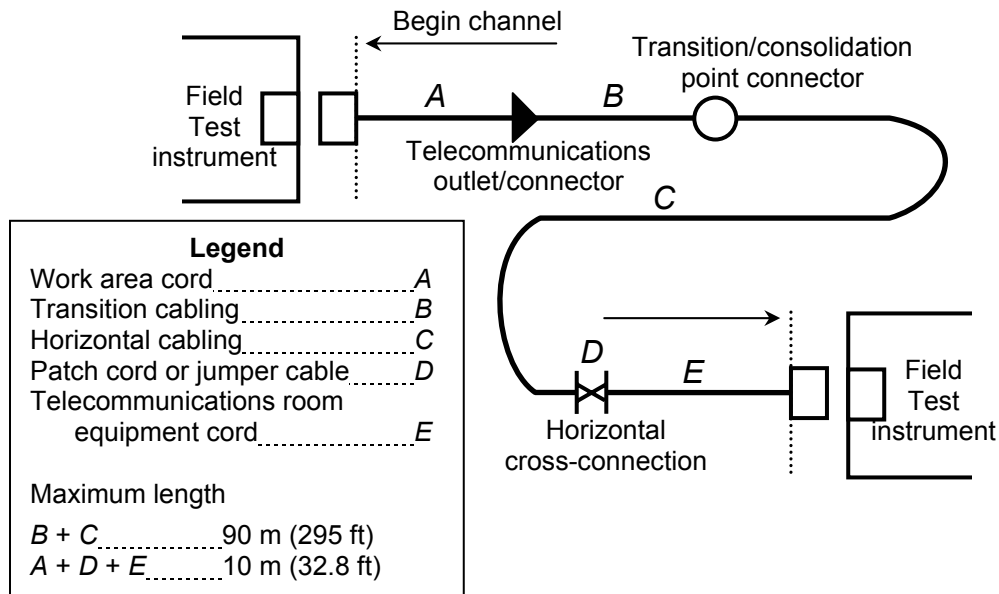


Figure 1 Schematic representation of a channel test configuration

The permanent link test configuration is used by installers and users of data telecommunications systems to verify the performance of permanently installed cabling. The permanent link consists of up to 90 m (295 ft) of horizontal cabling and one connection at each end and may also include an optional transition/consolidation point connection. The permanent link configuration excludes both the cable portion of the field tester cord and the connection to the field test device. A schematic representation of the permanent link test configuration is illustrated in figure 2.

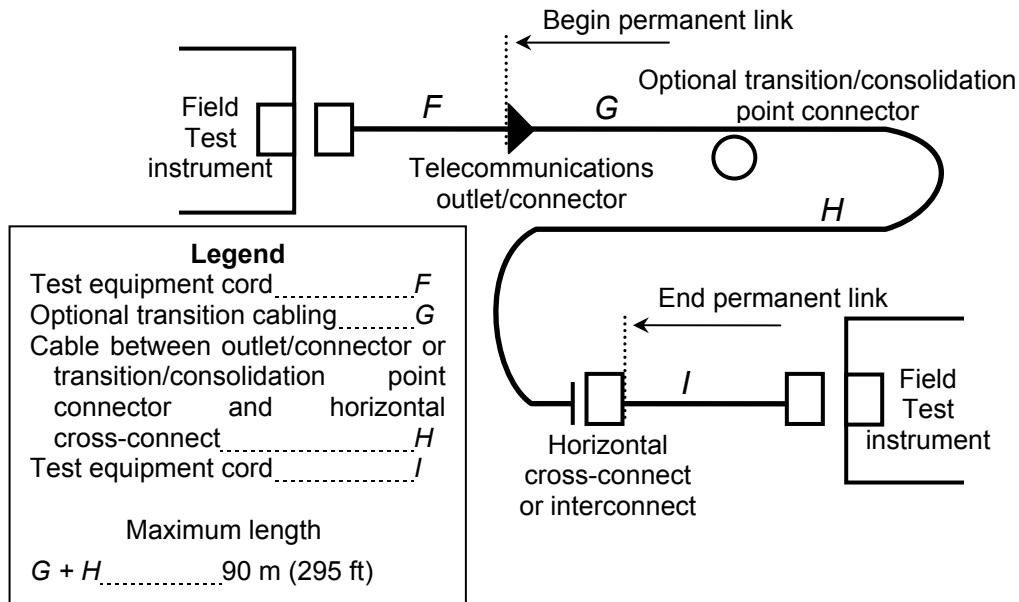


Figure 2 Schematic representation of a permanent link test configuration

5.2 Alien Crosstalk test configurations (ffs)

6 TRANSMISSION PARAMETERS

6.1 Insertion Loss

Insertion loss is a measure of the signal loss resulting from the insertion of cabling or a component between a transmitter and receiver. It is often referred to as attenuation. Insertion loss is the ratio of signal power at the receiver end to the input power determined from measured voltages, expressed in dB.

6.1.1 Cabling insertion loss

6.1.1.1 Channel Insertion Loss

For all frequencies from 1 MHz to 250 MHz, category 6 channel insertion loss shall meet the values determined using equation (1) as specified in TIA/EIA-568-B.2.-1.

$$INSERTIONLOSS_{channel} \leq 1.924 \times \sqrt{f} + 0.0173 \times f + \frac{0.204}{\sqrt{f}} + 0.0003 \times f^{1.5} \quad \text{dB} \quad (1)$$

For all frequencies (250 < f ≤ 625) the insertion loss of the channel should meet the values determined using equation (2).

1
2

$$INSERTIONLOSS_{channel} \leq 1.05 \left(1.82 \times \sqrt{f} + 0.0169 \times f + \frac{0.25}{\sqrt{f}} \right) + 4 \times 0.02 \times \sqrt{f} \quad \text{dB} \quad (2)$$

3

4 **6.1.1.2 Permanent Link Insertion Loss**

5 For all frequencies from 1 MHz to 250 MHz, category 6 permanent link shall meet the values
6 determined using equation (3) as specified in TIA/EIA-568-B.2.-1. For all frequencies (250 < f ≤
7 625) the insertion loss of the permanent link should meet the values determined using equation
8 (3).

9

10 (TBD) dB (3)

11 **6.1.3 Insertion Loss Scaling**

12 To ensure reliable 10GBASE-T operation, a minimum signal to noise ratio (SNR) must be
13 maintained. The PS ANEXT loss guideline of 6.4.2 can be relaxed based on a reduction in the
14 maximum insertion loss specified in 6.1.1. The insertion loss reduction can be achieved by
15 scaling the length of the cabling insertion loss.

16

17 The scaled Category 6 channel insertion loss is defined by equation (4):

18

$$Scaled_IL_channel \leq \frac{Length_m}{100} \times 1.05 \left(1.82 \times \sqrt{f} + 0.0169 \times f + \frac{0.25}{\sqrt{f}} \right) + 4 \times 0.02 \times \sqrt{f} \quad \text{dB} \quad (4)$$

19

20

21 **6.1.4 Insertion Loss of a Category 6 channel of 55 meters**

22 For all frequencies from 1 MHz to 250 MHz, the category 6 insertion loss of a 55 meter channel
23 shall meet the values determined using equation (5). For all frequencies (250 < f ≤ 625) MHz the
24 category 6 insertion loss of a 55 meter channel should meet the values determined using
25 equation (5).

26

27

$$Scaled_IL_channel(55\ m) \leq \frac{55}{100} \times 1.05 \left(1.82 \times \sqrt{f} + 0.0169 \times f + \frac{0.25}{\sqrt{f}} \right) + 4 \times 0.02 \times \sqrt{f} \quad \text{dB} \quad (5)$$

28

29

30 **6.1.5 Insertion Loss of a Category 6 permanent link of (TBD meters)**

31 For all frequencies from 1 MHz to 250 MHz, the category 6 insertion loss of a (TBD) meter
32 permanent link shall meet the values determined using equation (6). For all frequencies (250 < f ≤
33 625) MHz the category 6 insertion loss of a 55 meter channel should meet the values determined
34 using equation (6).

35

36 (TBD) dB

37

(6)

38 **6.2 NEXT loss**

39 NEXT loss is a measure of the unwanted signal coupling from a transmitter at the near-end into
40 neighboring pairs measured at the near-end. NEXT loss is expressed in dB relative to the
41 received signal level. In addition, since each duplex channel can be disturbed by more than one
42 duplex channel, power sum near-end crosstalk (PSNEXT) loss is also provided.

1 **6.2.1 Cabling Pair-to-pair NEXT loss**

2 **6.2.1.1 Pair-to-pair NEXT Loss Channel**

3 For all frequencies from 1 MHz to 250 MHz, category 6 channel pair-to-pair NEXT loss shall meet
 4 the values determined using equation (7) as specified in TIA/EIA-568-B.2.-1.
 5
 6

7
$$NEXT_{channel} \geq -20 \times \log_{10} \left(10^{\frac{44.3 - 15 \log_{10} \left(\frac{f}{100} \right)}{-20}} + 2 \times 10^{\frac{54 - 20 \log_{10} \left(\frac{f}{100} \right)}{-20}} \right) \text{ dB} \quad (7)$$

8
 9

10 For all frequencies between (250 < f < 330) MHz the channel pair-to-pair NEXT loss should meet
 11 the values determined using equation (7).
 12

13 For all frequencies (330 ≤ f ≤ 625) MHz the channel pair-to-pair NEXT loss of the cabling should
 14 meet the values determined using equation (8).
 15

16
$$NEXT_{channel} \geq 31 - 50 \times \log_{10} \left(\frac{f}{330} \right) \text{ dB} \quad (8)$$

17 **6.2.1.2 Pair-to-pair NEXT Loss Permanent Link**

18 (TBD) dB
 19 (9)

20 **6.2.2 Power sum NEXT loss**

21 Power sum near-end crosstalk loss takes into account the combined crosstalk (statistical) on a
 22 receive pair from all near-end disturbers operating simultaneously. The power sum near-end
 23 crosstalk (PSNEXT) loss is calculated in accordance with ASTM D4566 as a power sum on a
 24 selected pair from all other pairs as shown in equation (10) for the case of 4-pair cable.
 25

26
$$PSNEXT = -10 \log_{10} \left(10^{-X1/10} + 10^{-X2/10} + 10^{-X3/10} \right) \text{ dB} \quad (10)$$

27

28 where:

29
 30 X1, X2, X3 are the pair-to-pair crosstalk measurements in dB between the selected pair and the
 31 other three pairs.
 32

33 **6.2.2.1 Cabling power sum NEXT loss**

34 **6.2.2.1.1 PSNEXT Loss Channel**

35 For all frequencies from 1 MHz to 250 MHz, category 6 channel power sum NEXT loss shall meet
 36 the values determined using equation (11) as specified in TIA/EIA-568-B.2.-1.
 37
 38
 39

40
$$PSNEXT_{channel} \geq -20 \times \log_{10} \left(10^{\frac{42.3 - 15 \log_{10} \left(\frac{f}{100} \right)}{-20}} + 2 \times 10^{\frac{50 - 20 \log_{10} \left(\frac{f}{100} \right)}{-20}} \right) \text{ dB} \quad (11)$$

41

1 For all frequencies ($250 < f < 330$) MHz the channel pair-to-pair PSNEXT loss should meet the
 2 values determined using equation (11).

3
 4 For all frequencies ($330 \leq f \leq 625$) MHz the channel pair-to-pair PSNEXT loss of the cabling
 5 should meet the values determined using equation (12).
 6

$$7 \quad PSNEXT_{channel} \geq 28 - 42 \times \log_{10} \left(\frac{f}{330} \right) \text{ dB} \quad (12)$$

8 **6.2.2.1.2 PSNEXT Loss Permanent Link**

9 (TBD) dB (13)

10 **6.3 ELFEXT and FEXT loss**

11 FEXT loss is a measure of the unwanted signal coupling from a transmitter at the far-end into
 12 neighboring pairs measured at the near-end. FEXT loss is the ratio of the power coupled from a
 13 disturbing pair into the disturbed pair relative to the input power at the opposite end of the
 14 transmission lines determined from measured voltages. This ratio is expressed in dB.

15
 16 ELFEXT is expressed in dB as the difference between the measured FEXT loss and the insertion
 17 loss of the disturbed pair. In addition, since each duplex channel can be disturbed by more than
 18 one duplex channel, power sum equal level far-end crosstalk (PSELFEXT) is also specified for
 19 cabling and cables.

20 **6.3.1 Cabling pair-to-pair ELFEXT**

21 **6.3.1.1 Pair-to-pair ELFEXT Channel**

22 For all frequencies from 1 MHz to 250 MHz, category 6 channel ELFEXT shall meet the values
 23 determined using equation (13) as specified in TIA/EIA-568-B.2.-1. For all frequencies ($250 < f \leq$
 24 625) the category 6 channel ELFEXT of the channel should meet the values determined using
 25 equation (14).
 26

$$27 \quad ELFEXT_{channel} \geq -20 \times \log_{10} \left(10^{\frac{27.8 - 20 \log_{10} \left(\frac{f}{100} \right)}{-20}} + 4 \times 10^{\frac{43.1 - 20 \log_{10} \left(\frac{f}{100} \right)}{-20}} \right) \text{ dB} \quad (14)$$

28 **6.3.1.2 Pair-to-pair ELFEXT Permanent Link**

29 For all frequencies from 1 MHz to 250 MHz, category 6 permanent link ELFEXT shall meet the
 30 values determined using equation (14) as specified in TIA/EIA-568-B.2.-1. For all frequencies
 31 ($250 < f \leq 625$) the category 6 permanent link ELFEXT of the permanent link should meet the
 32 values determined using equation (15).
 33

34 TBD dB (15)

35 **6.3.2 Power sum ELFEXT**

36 Power sum equal level far-end crosstalk loss takes into account the combined crosstalk
 37 (statistical) on a receive pair from all far-end disturbers operating simultaneously. The power sum
 38 equal level far-end crosstalk (PSELFEXT) loss is calculated in accordance with ASTM D4566 as
 39 a power sum on a selected pair from all other pairs as shown in equation (16) for the case of 4-
 40 pair cable.
 41

$$42 \quad PSELFEXT = -10 \log_{10} \left(10^{-X1/10} + 10^{-X2/10} + 10^{-X3/10} \right) \text{ dB} \quad (16)$$

43

1
2
3
4
5
6
7
8
9
10
11
12

where:

X1, X2, X3 are the pair-to-pair crosstalk measurements in dB between the selected pair and the other three pairs.

6.3.2.1 Cabling power sum ELFEXT

6.3.2.1.1 Power sum ELFEXT Channel

For all frequencies from 1 MHz to 250 MHz, category 6 channel power sum ELFEXT shall meet the values determined using equation (16) as specified in TIA/EIA-568-B.2.-1. For all frequencies (250 < f ≤ 625) the category 6 channel power sum ELFEXT should meet the values determined using equation (17).

$$P_{SELFEXTchannel} \geq -20 \times \log_{10} \left(10^{\frac{24.8 - 20 \log_{10} \left(\frac{f}{100} \right)}{-20}} + 4 \times 10^{\frac{40.1 - 20 \log_{10} \left(\frac{f}{100} \right)}{-20}} \right) \text{db} \quad (17)$$

6.3.2.1.2 Power sum ELFEXT Permanent Link

For all frequencies from 1 MHz to 250 MHz, category 6 permanent link power sum ELFEXT shall meet the values determined using equation (17) as specified in TIA/EIA-568-B.2.-1. For all frequencies (250 < f ≤ 625) the category 6 permanent link power sum ELFEXT should meet the values determined using equation (18).

TBD dB (18)

6.4 Alien NEXT loss

Alien NEXT loss is a measure of the unwanted signal coupling between pairs in adjacent cabling from transmitters at the near-end into a pair measured at the near-end. Alien NEXT loss is expressed in dB relative to the received signal level. In addition, since each duplex channel can be disturbed by more than one duplex channel, power sum Alien near-end crosstalk (PS ANEXT) loss is also provided.

Editors Note: Alien NEXT Measurement procedure is under study.

6.4.1 Pair-to-pair ANEXT loss (ffs)

6.4.1.1 Cabling pair-to-pair ANEXT loss

6.4.1.1.1 ANEXT Channel Equation (19)

6,4,1,1,2 ANEXT Permanent Link Equation (20)

6.4.2 Power sum Alien NEXT loss

Power sum Alien near-end crosstalk loss takes into account the combined crosstalk (statistical) on a receive pair from near-end disturbers in adjacent cables operating simultaneously. The power sum near-end crosstalk (PSANEXT) loss is determined by summing the power of the individual pair-to-pair differential Alien NEXT loss values over the frequency range 1 MHz to 625 MHz as follows in equation (21):

$$-10 \times \log_{10} \sum_{i=1}^n 10^{\frac{-AN(f)_i}{10}} \quad (\text{dB}) \quad (21)$$

40

1
2
3
4
5
6
7
8

where

AN(f)_i is the magnitude in dB of PS ANEXT loss at frequency f of pair combination i
i is the pair-to-pair combination (1 to n)
n is the number of pair-to-pair combinations between adjacent cables

9 **6.4.2.1 Power sum Alien NEXT loss for a Category 6 channel of 100 meters**

10 For a 10GBASE-T 100 meter Category 6 channel with the maximum insertion loss specified in
11 6.1 the PS ANEXT loss between the disturbed duplex channel and the disturbing duplex
12 channels in adjacent cabling shall meet the values determined using equation (22).
13

$$14 \quad PS \text{ ANEXT} > \begin{cases} 62 - 10 \cdot \log_{10}(f\text{MHz}/100) & 1 \text{ MHz} \leq f \leq 100 \text{ MHz} \\ 62 - 15 \cdot \log_{10}(f\text{MHz}/100) & 100 \text{ MHz} < f \leq 625 \text{ MHz} \end{cases} \quad (22)$$

17 **6.4.2.2 Power sum Alien NEXT loss Adjustment**

18 The adjusted PS ANEXT loss requirement is determined by first calculating the PS
19 ANEXT_constant and utilizing the constant in the PS ANEXT limit line model.
20

21 The PS ANEXT_constant is defined by the following equation (23):
22

$$23 \quad PSANEXT_Constant = 62 - (Cat6_IL_250MHz - SCat6_IL_250MHz) \times \frac{15}{15.6} \text{ dB} \quad (23)$$

24 where

25
26 Cat6_IL_250MHz is the Category 6 insertion loss at 250 MHz for a 100 meter channel
27 SCat6_IL_250MHz is the scaled Category 6 insertion at 250 MHz

28 **6.4.2.2 PS ANEXT for a Category 6 channel of 55 meters**

29 For a 10GBASE-T 55 meter Category 6 channel with the maximum insertion loss specified in
30 6.1.3 the PS ANEXT loss between the disturbed duplex channel and the disturbing duplex
31 channels in adjacent cabling shall meet the values determined using equation (24).
32

$$33 \quad PS \text{ ANEXT} > \begin{cases} 47 - 10 \cdot \log_{10}(f\text{MHz}/100) & 1 \text{ MHz} \leq f \leq 100 \text{ MHz} \\ 47 - 15 \cdot \log_{10}(f\text{MHz}/100) & 100 \text{ MHz} < f \leq (TBD \leq 625) \text{ MHz} \end{cases} \quad (24)$$

36 **6.5 Alien FEXT and Alien ELFEXT loss (ffs)**

37 TBD dB (25)

38 **6.6 Return Loss**

39 Return loss is a measure of the reflected energy caused by impedance mismatches in the cabling
40 system and is especially important for applications that use simultaneous bi-directional
41 transmission. Return loss is expressed in dB relative to the reflected signal level.

42 **6.6.1 Cabling Return Loss**

43 **6.6.1.1 Channel return loss**

44 For all frequencies from 1 MHz to 250 MHz, category 6 channel return loss shall meet the values
45 specified in table 1 as specified in TIA/EIA-568-B.2.-1. For all frequencies (250 < f ≤ 625) the

1 category 6 channel return loss should meet the values in Table 1.

2

3 **Table 1 Category 6 channel return loss**

4

5

Frequency (MHz)	Return Loss (dB)
$1 \leq f < 10$	19
$10 \leq f < 40$	$24 - 5\log_{10}(f)$
$40 \leq f \leq 250$	$32 - 10\log_{10}(f)$
$250 < f < 400$	$32 - 10\log_{10}(f)$
$400 \leq f \leq 625$	6

6

7

8 **6.6.1.2 Permanent link return loss**

9

10 For all frequencies from 1 MHz to 250 MHz, the category 6 permanent link return loss shall meet
 11 the values specified in table 2 as specified in TIA/EIA-568-B.2.-1. For all frequencies ($250 < f \leq$
 12 625) the category 6 channel return loss should meet the values in Table 2.

13 **Table 2 Category 6 permanent link return loss**

14

15

Frequency (MHz)	Return Loss (dB)
$1 \leq f < 10$	TBD
$10 \leq f < 40$	TBD
$40 \leq f \leq 250$	TBD
$250 < f < 400$	TBD
$400 \leq f \leq 625$	TBD

16 **6.7 Propagation delay/delay skew**

17 Propagation delay is the time it takes for a signal to propagate from one end to the other.
 18 Propagation delay skew is a measurement of the signaling delay difference from the fastest pair
 19 to the slowest. Propagation delay and propagation delay skew are expressed in
 20 nanoseconds (ns). Propagation delay and propagation delay skew shall be measured for all
 21 pairs for cables in accordance with ASTM D4566. Propagation delay and propagation delay
 22 skew shall be measured for all pairs for cabling in accordance with annex D of
 23 ANSI/TIA/EIA-568-B.2.

24 **6.7.1 Cabling propagation delay**

25 The maximum propagation delay for a category 6 channel configuration shall be less than 555 ns
 26 measured at 10 MHz.

27

28 The maximum propagation delay for a category 6 permanent link configuration shall be less than
 29 498 ns measured at 10 MHz.

30 **6.7.2 Cabling propagation delay skew**

31 The maximum propagation delay skew for a category 6 channel configuration shall be less than
 32 50 ns.

33

34 The maximum propagation delay skew for a category 6 permanent link configuration shall not
 35 exceed 44 ns.

1

2 **Annex A**

3 **Annex A Cabling (field) measurement procedures (TBD)**

4 **Annex B**

5 **Annex B Test instruments**

6
7 **B.1 Accuracy requirements for level IIIe field testers**

8 The level IIIe requirements in this annex are stated for baseline performance, permanent link and
9 channel configurations. The field tester performance for the channel and permanent link shall
10 apply to the performance at the reference plane as shown in TIA/EIA-568-B-2.1 figures 1 and 2
11 respectively.

12
13 The methods to compare results from field testers with those obtained using laboratory
14 equipment as defined in TIA/EIA-568-B.2, Annex J Comparison measurement procedures
15 (normative) shall apply. The observed accuracy from comparison methods shall be in harmony
16 with predicted measurement accuracy from performance parameters as defined in this annex.

17
18 **B.1.1 Measurement performance requirements**

19
20 The requirements in this annex shall apply in addition those stated in TIA/EIA-568-B.2-1. Where
21 requirements are tighter, the tighter requirements shall apply.

22
23 Table 3 Level IIIe field tester accuracy performance

24

Parameter	Baseline field tester	Field tester with Level IIIe permanent link adapter	Field tester with Level IIIe channel adapter	
Dynamic range	3 dB over test limit PP NEXT and FEXT 65 dB PS NEXT and FEXT 62 dB			<i>dB</i>
Amplitude resolution	0.1			<i>dB</i>
Frequency range and resolution	1 – 31.25 MHz: 150 kHz 31.25–100 MHz: 250 kHz 100 MHz – 250 MHz: 500 kHz 250 MHz – 625 MHz: 1 MHz			<i>MHz</i>
Dynamic Accuracy NEXT	± 0.75			<i>dB</i>
Dynamic Accuracy ELFEXT	± 1.0 (FEXT dynamic accuracy is tested to ± 0.75 dB)			<i>dB</i>
Source/load return loss	20 – 12.5 log(f/100), 20 dB max. 12.5 dB min	18 – 12.5 log(f/100), 20 dB max., 12 dB min		<i>dB</i>
Random Noise Floor	75 – 15 log(f/100), 85 dB max			<i>dB</i>

Residual NEXT	$65 - 20 \log(f/100)$ (measured to 85 dB max)	$60 - 20 \log(f/100)$ (measured to 85 dB max)	$54 - 20 \log(f/100)$ (measured to 85 dB max)	dB
Residual FEXT	$65 - 20 \log(f/100)$ (measured to 85 dB max)	$65 - 20 \log(f/100)$ (measured to 85 dB max)	$43.1 - 20 \log(f/100)$ (measured to 85 dB max)	dB
Output Balance	Signal $40 - 20 \log(f/100)$ (measured to 60 dB max)	$37 - 20 \log(f/100)$ (measured to 60 dB max)		dB
Common Rejection	Mode $40 - 20 \log(f/100)$ (measured to 60 dB max)	$37 - 20 \log(f/100)$ (measured to 60 dB max)		dB
Tracking	± 0.5 dB	1 MHz – 250 MHz: ± 0.5 dB 250 MHz – 625 MHz: $\pm \{0.5 + 0.000667 \cdot (f-250)\}$ dB		dB
Directivity	(applicable when IL > 3dB) 1 MHz – 300 MHz: $27-7\log(f/100)$, 30 dB max. 300 MHz – 625 MHz: 23.7 dB	$25-20\log(f/100)$, 25 dB max, 15 dB min		dB
Source Match	20 dB	$20-20\log(f/100)$, 20 dB max, 12 dB min		dB
Return loss of Termination	(applicable when IL > 3dB) $20-15\log(f/100)$, 25 dB max., 12.5 dB min	$16-15\log(f/100)$, 25 dB max, 12 dB min		dB

1

2 **Table 4** Explanation of Notes for Level IIIe specifications

3

Note	Description
1	The dynamic range for pair-to-pair NEXT and FEXT is 65 dB minimum.
2	The dynamic range for power sum NEXT and power sum FEXT is 62 dB minimum.
3	Dynamic accuracy requirements shall be tested up to the specified dynamic range for NEXT and FEXT.
4	Dynamic accuracy ELFEXT assumes a dynamic accuracy requirement of ± 0.75 dB for FEXT, which shall be tested, and that the dynamic accuracy performance for insertion loss and FEXT add to the ELFEXT dynamic accuracy shown. It is assumed that the dynamic accuracy performance for ACR equals the dynamic accuracy for ELFEXT.
5	The verification of residual NEXT and FEXT is up to 85 dB maximum. It is assumed that the frequency response changes at a 20 dB/decade rate.
6	Performance verification of Output Signal Balance and Common Mode Rejection is up to 60 dB maximum. It is assumed that the frequency response changes at a 20 dB/decade rate.

7	Permanent link adapter NEXT loss shall between the lower and upper ranges of test plugs as specified for category 6 in IEC 60603-7. Compliance with this requirement can also be demonstrated by performing a comparison test as in TIA/EIA-568-B.2, Annex J. In this case, a reference plug qualified per IEC 60603-7 shall be used to obtain the reference laboratory measurement.
8	Permanent link adapter FEXT loss shall between the lower and upper ranges of test plugs as specified for category 6 in IEC 60603-7. Compliance with this requirement can also be demonstrated by performing a comparison test as in TIA/EIA-568-B.2, Annex J. In this case, a reference plug qualified per IEC 60603-7 shall be used to obtain the reference laboratory measurement.

1

2 **Annex C**

3 **Annex C Alien Crosstalk Mitigation (ffs)**

4
5
6
7
8
9
10
11
12
13
14