


Management Overview

Jeff Mandin
PMC-Sierra

802.3 Managed Objects

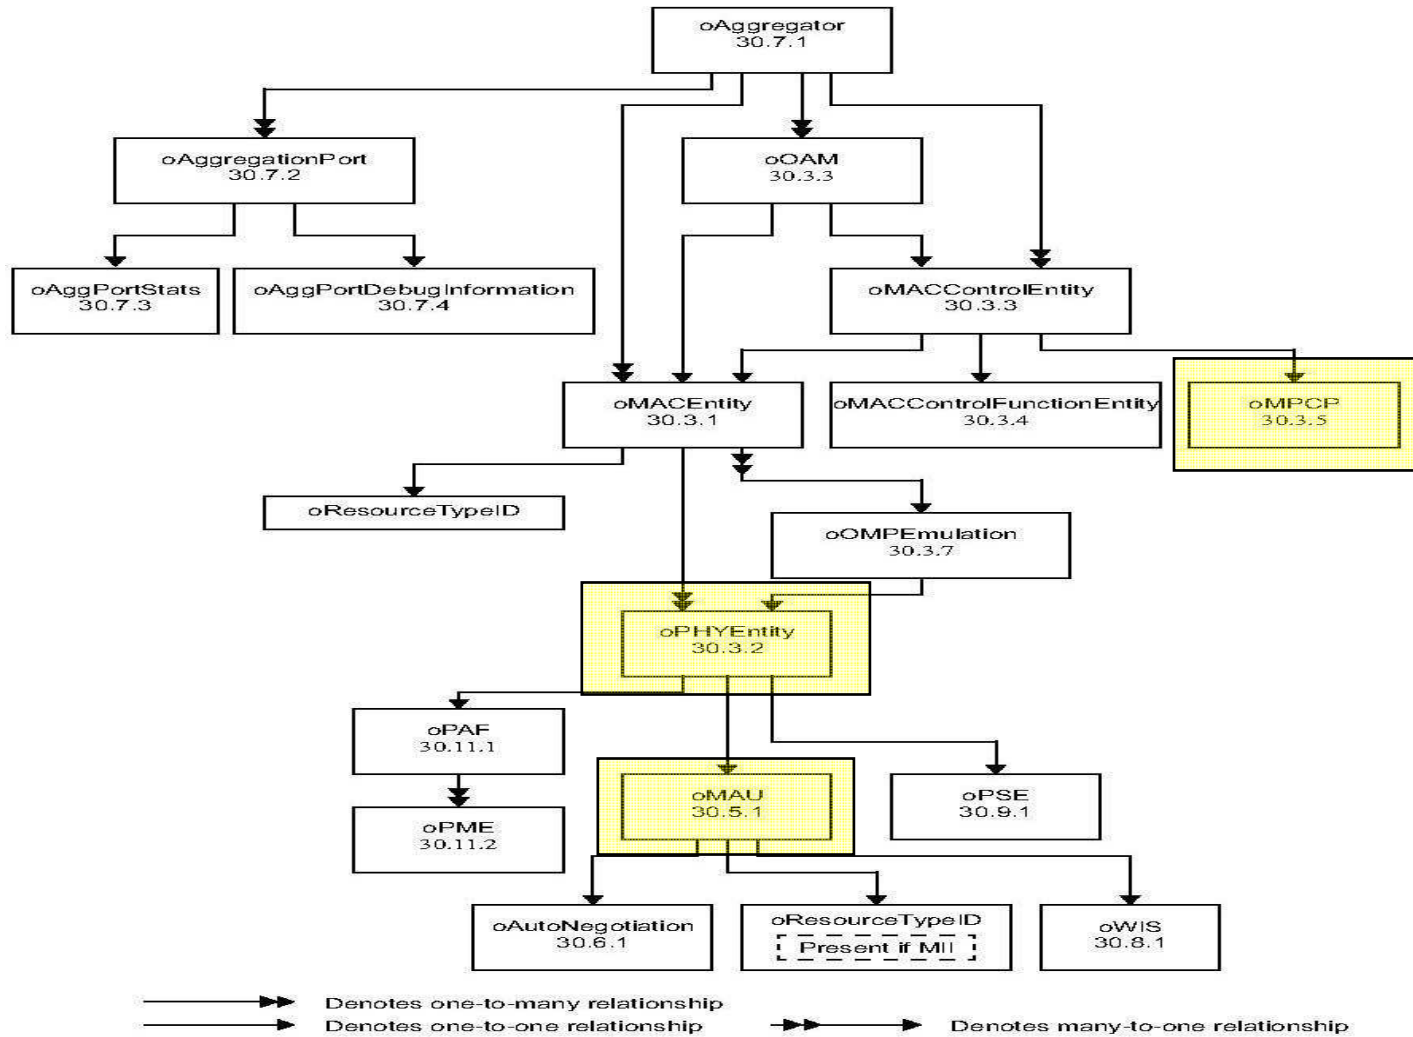

Managed Objects and their 10G changes

- **oMPCP:**
 - New variables:
 - DiscoveryInfo
 - PeerDiscoveryInfo
- **oPhyEntity:**
 - New values for PhyType variables
 - At the moment this just expands the definition of 10GBASE-R to include clause 92
 - If there are new PCS types for symmetric and asymmetric 10GEPON these will be added later
- **oMAU:**
 - New values for MauType variable:
 - 1 per each of the 12 10GEPON PMDs
 - Extend the description of the FECCorrectedBlocks and FECUncorrectableBlocks counters to include the relevant 10GEPON PMDs

Details

- Updating counter increment rates for 10G
 - All the MPCP counters (ie. **aMPCPMACCtrlFramesTransmitted** etc.)
 - **aFECCorrectedBlocks** and **aFECUncorrectableBlocks** are updated by 802.3ap, so probably don't do it in 802.3av