

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	MS network entry for non-transparent Relay Station with Distributed Scheduling	
Date Submitted	2007-01-16	
Source(s)	Masato Okuda, Antoni Oleszczuk, Yuefeng Zhou and Mike Hart Fujitsu	Voice: +81-44-754-2811 Fax: +81-44-754-2786 okuda@jp.fujitsu.com
	Chie Ming Chou, Tzu-Ming Lin, Wern-Ho Sheen, Fang-Ching Ren, Jen-Shun Yang, I-Kang Fu, Ching-Tang Hsieh ITRI/NCTU	chieming@itri.org.tw
	Shashikant Maheshwari, Yousuf Saifullah, Haihong Zheng Nokia	shashikant.maheshwari@nokia.com, Yousuf.saifullah@nokia.com, haihong.1.zheng@nokia.com
	Gang Shen, Zhang KaiBin Alcatel Shanghai Bell Co., Ltd.	Voice: 86-21-58541240-8194 Gang.A.Shen@alcatel-sbell.com.cn
	Yanling Lu, Ting Li Hisilicon Technologies	luyanling@hisilicon.com Voice: 86-10-82829010
	David Comstock, John Lee, Zheng Shang, Jingning Zhu Huawei Technologies	dcomstock@huawei.com Voice: +1 858 735 9382
Re:	IEEE802.16j-06/034: "Call for Technical Proposals regarding IEEE802.16j"	
Abstract	This contribution proposes MS network entry procedures and additional TLVs in non-transparent Relay Station systems.	
Purpose	To propose text to describe MS network entry in non-transparent Relay Station systems	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known	

**Policy and
Procedures**

use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <<mailto:chair@wirelessman.org>> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://ieee802.org/16/ipr/patents/notices>>.

MS network entry for non-transparent Relay Station with Distributed Scheduling

Masato Okuda, Antoni Oleszczuk, [Yuefeng Zhou](#) and Mike Hart

Fang-Ching Ren, I-Kang Fu,

Shashikant Maheshwari, Yousuf Saifullah, Haihong Zheng

Gang Shen, Zhang KaiBin

[Yanling Lu](#), [Ting Li](#), [David Comstock](#), [John Lee](#), [Zheng Shang](#), [Jingning Zhu](#)

Introduction

This contribution proposes MS network entry procedures and additional TLVs in non-transparent Relay Station with distributed scheduling. A non-transparent RS transmits its own preamble, DL-MAP and UL-MAP. Therefore, a MS recognizes it as a BS. The non-transparent RS has two types, distributed and centralized scheduling. The distributed scheduling type RS creates MAPs by itself and broadcasts them to MS. The centralized scheduling type RS does not create DL-MAP and UL-MAP by itself, However RS may modify it if required. Associated MR-BS creates and sends DL-MAP and UL-MAP to the RS, and the RS broadcasts them on its access link. MS network entry to this type of RS is describes in another contribution.

The MR-BS has MS management and connection management function in order to simplify RS function. Therefore, the intermediate RS basically relays MAC management messages between the MR-BS and MS except for some additional function. In order for the MR-BS to manage network entry procedure of a MS under a RS, the RS and the MR-BS are required to exchange MAC management messages with new TLVs.

This contribution describes detail message sequences and RS/MR-BS behavior in addition to new TLV.

Specific Text Changes

Insert the new subclause 6.3.9.16.2 (Support for network entry and initialization in relay mode):

[6.3.9.16.2 MS network entry procedures in non-transparent RS systems](#)

[6.3.9.16.2.1 Non-transparent RS with Centralized scheduling](#)

[This subclause is just a place holder. The contents are in a different contribution.]

[6.3.9.16.2.2 Non-transparent RS with Distributed scheduling](#)

In MS network entry procedures to non-transparent RS systems, MS scans for downlink channel and establish synchronization with the non-transparent RS, then obtains transmit parameters from UCD message as described in 6.3.9.1 through 6.3.9.4.

The initial ranging process shall begin by sending an initial-ranging CDMA codes on the UL allocation dedicated for that purpose (for more details see 6.3.10.3). RS and MS continue CDMA code transmission and reception as defined in 6.3.10.3 until RS receives the CDMA code successfully unless the MS receives abort status in RNG-RSP or the retry count exceeds the maximum number.

When the RS receives the CDMA code resulting in success status, it sends a RNG-RSP containing success status to the MS. And the RS also provides bandwidth allocation to the MS with CDMA_Allocation-IE in UL-MAP, so that the MS can send a RNG-REQ containing MS MAC Address with initial ranging CID.

~~As an option, the RS may send a RNG-REQ message containing New MS Indication ID-TLV with the RS's basic CID to the MR-BS after receiving the CDMA code successfully. In this case, up on receiving the RNG-~~

REQ containing New MS Indication ID TLV, the MR-BS confirms whether it can accept a new MS entry request. If it can accept the request, it sends a RNG-RSP containing success status to the RS, otherwise a RNG-RSP with abort status. When the RS receives the RNG-RSP with ranging status from the MR-BS, it sends a RNG-RSP containing the same ranging status as in the received RNG-RSP and the ranging code attributes with initial ranging CID. If the ranging status in the RNG-RSP is success, the RS provides bandwidth allocation with CDMA_Allocation-IE in UL-MAP, so that the MS can send a RNG-REQ containing MS MAC Address with initial ranging CID.

Receiving the RNG-REQ containing the MS MAC Address, the RS relays it with the RS basic management CID to MR-BS. The RNG-REQ message may contain New MS Indication ID. The RS shall use the same value of New MS Indication ID as in the previous RNG-REQ transmitted upon successful reception of CDMA ranging code, so that the MR-BS can recognize the two RNG-REQ messages containing the same New MS Indication ID are used for the same MS network entry process.

Once the MR-BS receives the RNG-REQ containing MS MAC Address with the RS basic CID, the MR-BS shall assign Basic and Primary management CIDs to the MS, and transmit a RNG-RSP containing those management CIDs and MS MAC Address with the RS basic CID.

The RS receiving the RNG-RSP containing the management CIDs and MS MAC Address shall relay it to the MS with the initial ranging CID.

After assigning the basic and primary management CID to a MS, the MS and MR-BS continue network entry process as described in the 6.3.9.7 through 6.3.9.13 using MS's management CIDs. The RS shall relay management messages between them. The RS may monitor management messages and derive some information, e.g. capability information, etc.

As an option, the RS may send a RNG-REQ message containing New MS Indication ID TLV with the RS's basic CID to the MR-BS up on receiving the CDMA code successfully before it sends a RNG-RSP to the MS. In this case, when receiving the RNG-REQ containing New MS Indication ID TLV, the MR-BS confirms whether it can accept a new MS entry request. If it can accept the request, it sends a RNG-RSP containing success status to the RS, otherwise a RNG-RSP with abort status. When the RS receives the RNG-RSP with ranging status from the MR-BS, it sends a RNG-RSP containing the same ranging status as in the received RNG-RSP and the ranging code attributes with initial ranging CID. If the ranging status in the RNG-RSP is success, the RS provides bandwidth allocation with CDMA_Allocation-IE in UL-MAP, so that the MS can send a RNG-REQ containing MS MAC Address with initial ranging CID.

When the RS relays the received RNG-REQ to the MR-BS, it adds the New MS Indication ID. The RS uses the same value of New MS Indication ID as in the previous RNG-REQ transmitted upon successful reception of CDMA ranging code, so that the MR-BS can recognize the two RNG-REQ messages containing the same New MS Indication ID are used for the same MS network entry process.

The message sequences chart (Table xxx-2 and xxx-3) on the following page defines the ranging and adjustment process that shall be followed by compliant RSs and MR-BSs. For CDMA ranging process between RS and MS, these details can be found in 6.3.10.3.

Table xxx-2 Ranging and automatic adjustments procedure in MR mode


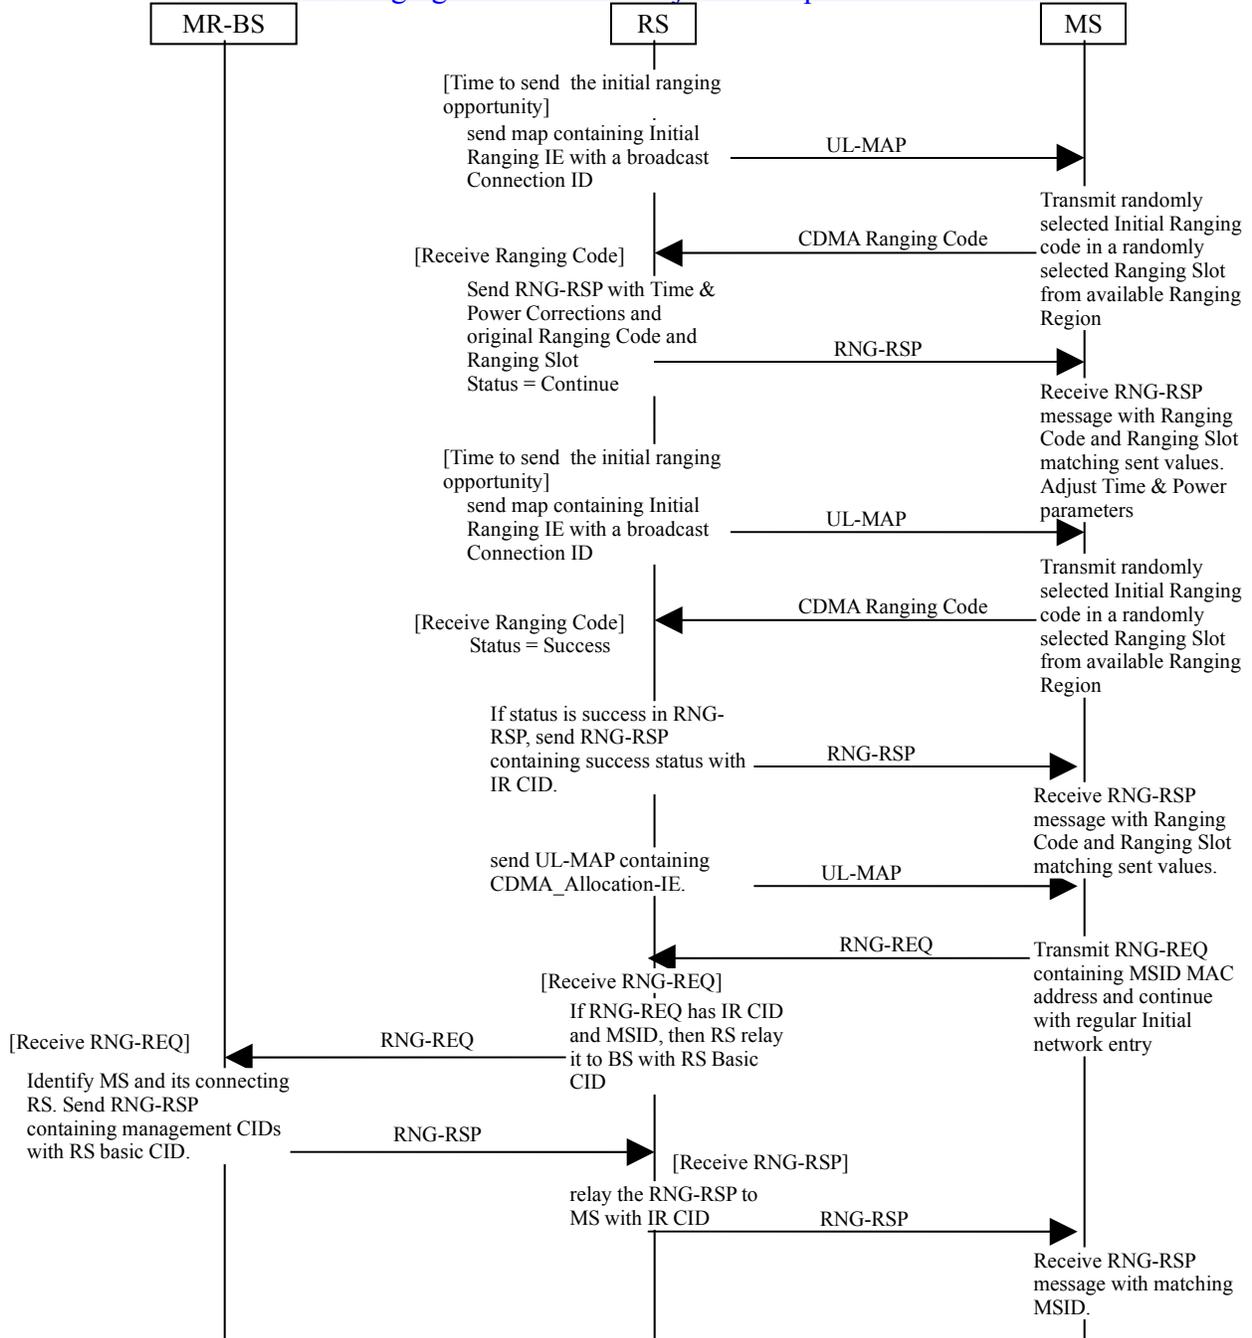


Table xxx-32 Ranging and automatic adjustments procedure with optional availability check at MR-BS in MR mode

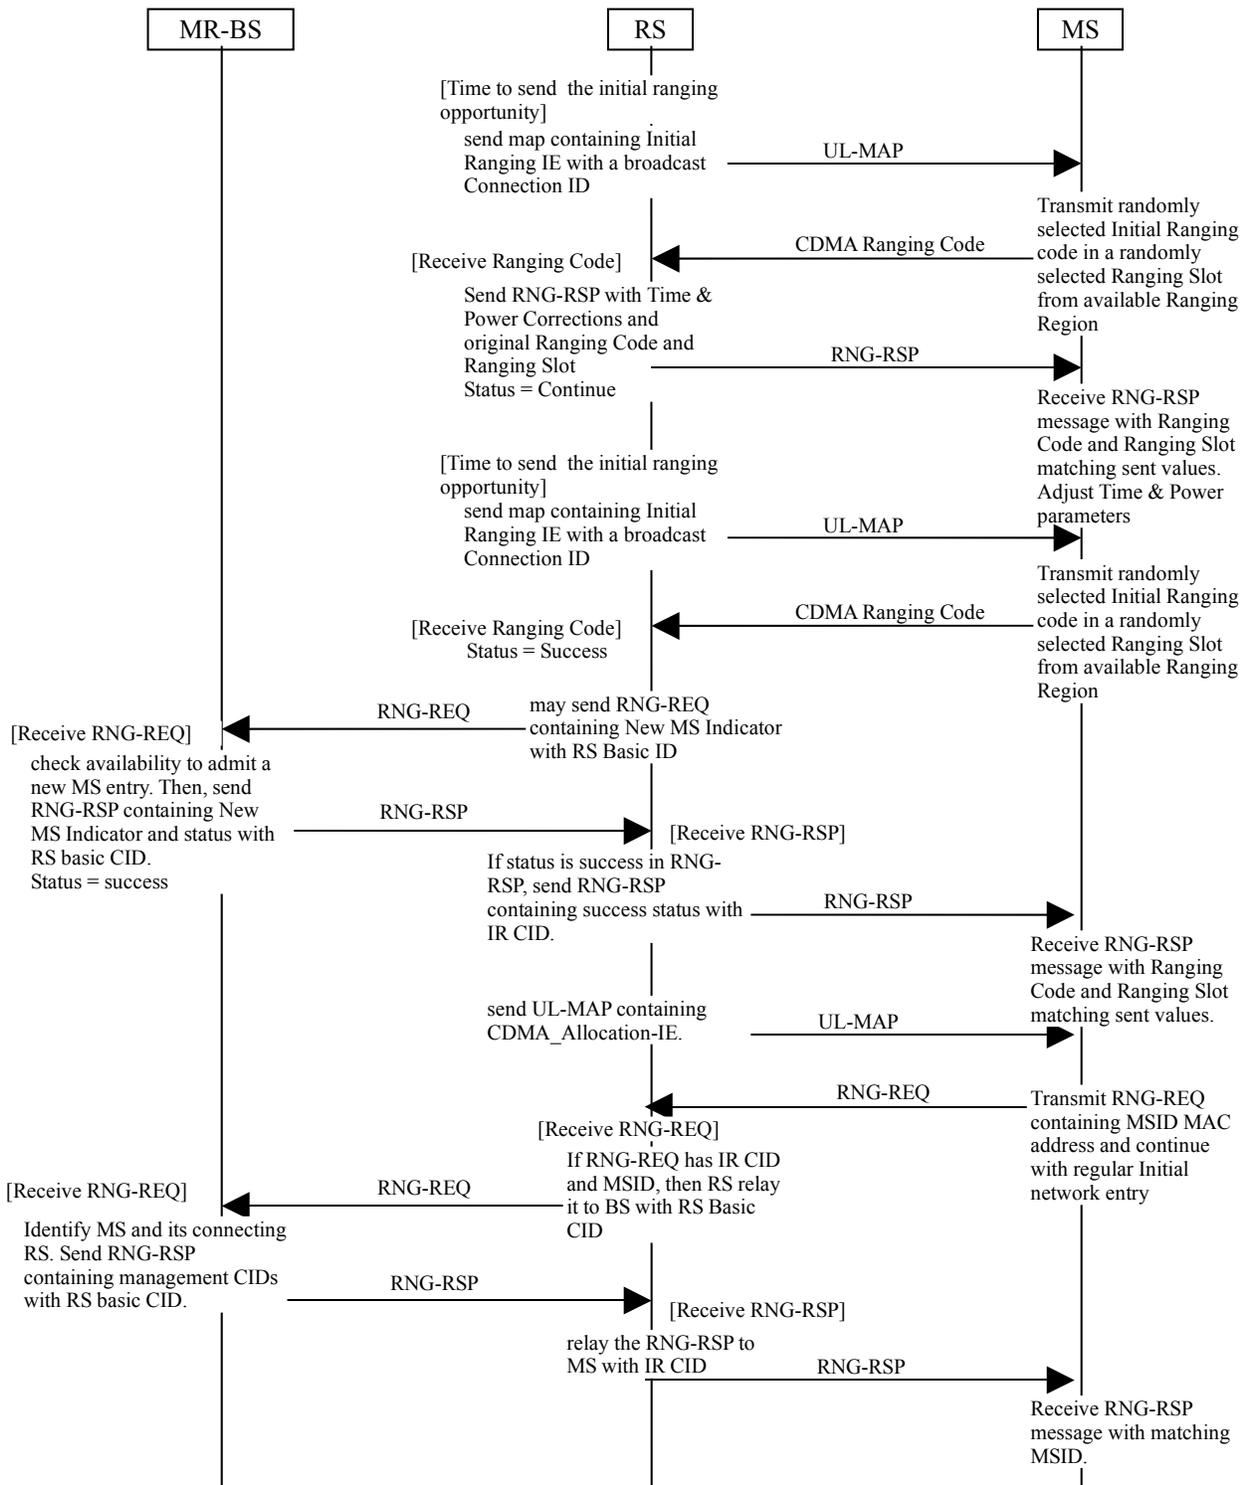

Insert the following rows into Table 364 at 11.5 RNG-REQ TLV:

Table 364—RNG-REQ message encodings

Name	Type (1 byte)	Length	Value (variable-length)	PHY Scope
New MS Indication ID	TBA	1	Unique identifier assigned by RS for each MS under ranging process.	OFDMA
Received Ranging Codes	TBA	Variable	Received Ranging Codes is a compound TLV value that indicates received code information.	OFDMA
Timing Adjust	TBA.1	4	Tx timing offset adjustment (signed 32-bit). The amount of time required to adjust SS transmission so the bursts will arrive at the expected time instance at the BS. Units are PHY specific (see 10.3).	OFDMA
Power Level Adjust	TBA.2	1	Tx Power offset adjustment (signed 8-bit, 0.25 dB units) Specifies the relative change in transmission power level that the SS is to make in order that transmissions arrive at the BS at the desired power. When subchannelization is employed, the subscriber shall interpret the power offset adjustment as a required change to the transmitted power density.	OFDMA
Offset Frequency Adjust	TBA.3	4	Tx frequency offset adjustment (signed 32-bit, Hz units). Specifies the relative change in transmission frequency that the SS is to make in order to better match the BS. (This is fine-frequency adjustment within a channel, not reassignment to a different channel.)	OFDMA
Ranging Status	TBA.4	1	Used to indicate whether uplink messages are received within acceptable limits by BS. 1 = continue, 2 = abort, 3 = success	OFDMA
Ranging code attributes	TBA.5	4	Bits 31:22 – Used to indicate the OFDM time symbol reference that was used to transmit the ranging code. Bits 21:16 – Used to indicate the OFDMA subchannel reference that was used to transmit the ranging code. Bits 15:8 – Used to indicate the ranging code index that was sent by the SS. Bits 7:0 – The 8 least significant bits of the frame number of the OFDMA frame where the SS sent the ranging code.	OFDMA

Insert the following rows into Table 367 at 11.6 RNG-RSP TLV:

Table 367—RNG-RSP message encodings

Name	Type (1 byte)	Length	Value (variable-length)
New MS Indication ID	TBA	1	New MS Indication ID from corresponding RNG-REQ from RS.

References

- [1] M.Okuda, “relaying method proposal for 802.16j”, IEEE C802.16j-06_132, IEEE 802.16 meeting #46, Dallas, November 2006.
- [2] M.Okuda, “MS network entry for transparent Relay Station”, IEEE C802.16j-06_124, IEEE 802.16 meeting #46, Dallas, November 2006.
- [3] Y. Saifullah, “Resource Request for Bandwidth”, IEEE C802.16j-06_189, IEEE 802.16 meeting #46, Dallas, November 2006.
- [4] Shashikant Maheshwari, “RS support for OFDMA Based Ranging” IEEE C802.16j-06_193, IEEE 802.16 meeting #46, Dallas, November 2006.