

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>Neighbor Path Metric in Neighbor Information</b>	
Date Submitted	<b>2007-03-05</b>	
Source(s)	Shyamal Ramachandran Motorola, Inc. 1064 Greenwood Blvd. Ste. 400 Lake Mary, FL 32746 USA	Voice: (407) 562 4054 Fax: (407) 562 4001 <a href="mailto:shyamal.ramachandran@motorola.com">shyamal.ramachandran@motorola.com</a>
Re:	IEEE 802.16j technical contribution in response to call <a href="#">IEEE 802.16j-07/007r2</a> .	
Abstract	This contribution proposes a method to deliver to RSs the path metric between its neighbor RSs and the MR-BS.	
Purpose	Discussion and adoption of the proposed text changes in IEEE 802.16j.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.	

## Neighbor Path Metric in Neighbor Information

*Shyamal Ramachandran*

### Problem Statement

The path selected by the RS to reach the MR-BS might have been the best available at the time of network entry. However, due to constantly changing physical link characteristics and network traffic load, the current path to the MR-BS might no longer be the best. It is possible that a path through a different access station might prove to be a better choice. Therefore, it is essential that each RS be continuously aware of its neighbors and path options to the MR-BS through them.

This proposal enables a RS in a MR cell to determine the end-to-end (ETE) path cost of reaching the MR-BS through its neighbors.

Consider the exemplary MR network shown in Figure 1. BS is a MR-BS. RS1, RS2 and RS3 are relay stations that have entered the MR cell directly through BS.  $C_{b1}$  is the path cost of the path between BS and RS1.  $C_{b2}$  is the cost of the path between BS and RS2.  $C_{b3}$  is the cost of the path between BS and RS3.

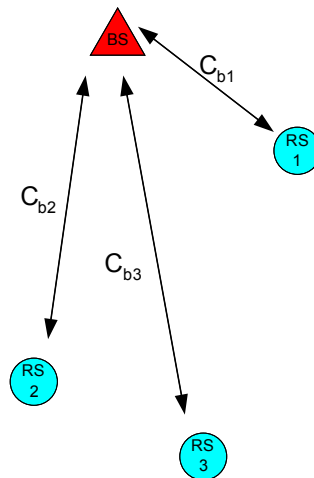


Figure 1 - Exemplary IEEE 802.16j network with relay stations

In the example shown in Figure 1, if RS3 wants to reach the BS through any other RS, it needs to learn of the presence of RS1 and RS2. Further, it needs to determine the ETE path metric to BS through RS1 and RS2. For this purpose RS3 must measure the quality of the air interface link between itself and the other two relay stations. Further, RS3 must also determine the existing path metric from the BS to RS2 and RS1, i.e. the path metric values  $C_{b2}$  and  $C_{b1}$ .

RS3 can detect the presence of neighboring RSs and may perform the 1-hop air interface measurements to RS1 and RS2 using postamble or other signature sequence transmissions being proposed by other contributions. This is out of the scope of this contribution. However, in order to decide whether the path to the BS through RS1 is better or worse than the path through RS2; or to decide if either path options through RS1 or RS2 is better than its current direct path, RS3 must learn the current path metrics  $C_{b1}$  and  $C_{b2}$ . This contribution proposes a method to enable RS3 learn these path metric values.

## Proposed Solution

The current IEEE 802.16j working document (802.16j-06/026r2) has already adopted a message MR\_NBR-INFO, which permits the MR-BS to inform each RS of the other neighbors in its neighborhood. This message also includes the preamble index being transmitted by these neighbors. In the context of the example shown in Figure 1, BS sends a MR\_NBR-INFO message to RS3 including RS1 and RS2 as neighbors.

The MR\_NBR-INFO message has the option of carrying TLV encoded values as shown in section 11.XX.

It is proposed that the ETE path cost from the neighbor to the MR-BS be included as a TLV parameter.

This enables RS3 to learn of Cb1 and Cb2 via the MR\_NBR-INFO message sent by BS.

## Proposed Text

*Insert new row to table in subclause 11.XX:*

### 11.XX MR\_NBR-INFO Management Message Encoding

<b>Name</b>	<b>Type (1 byte)</b>	<b>Length (bits)</b>
DCD Configuration Change count	1	4
UCD Configuration Change count	2	4
DCD settings	3	Variable
UCD settings	4	Variable
Neighbor BS trigger	5	Variable
PHY Mode ID	6	8
<b><u>ETE Metric</u></b>	<b><u>7</u></b>	<b><u>16</u></b>