

Missing Constants in RFER Monitor State Diagram

July 15, 2019


Mike Tu tum@broadcom.com

Steven Chen steven.chen@broadcom.com

Tom Souvignier tom.souvignier@broadcom.com

Introduction

- In D2.0, RFER_CNT_LIMIT and RFRX_CNT_LIMIT are both used in the RFER monitor state diagram, but their specific values are not defined.
- Propose to adopt 802.3bp 97.3.6.2.1 numbers for 802.3ch
- D2.0 149.3.7.2.1, page 108, line 4, insert the following two constants:
 - RFER_CNT_LIMIT
 - TYPE: Integer
 - VALUE: 16
 - Number of Reed-Solomon frames with uncorrectable errors.
 - RFRX_CNT_LIMIT
 - TYPE: Integer
 - VALUE: 88
 - Number of Reed-Solomon frames received over bit error rate interval.

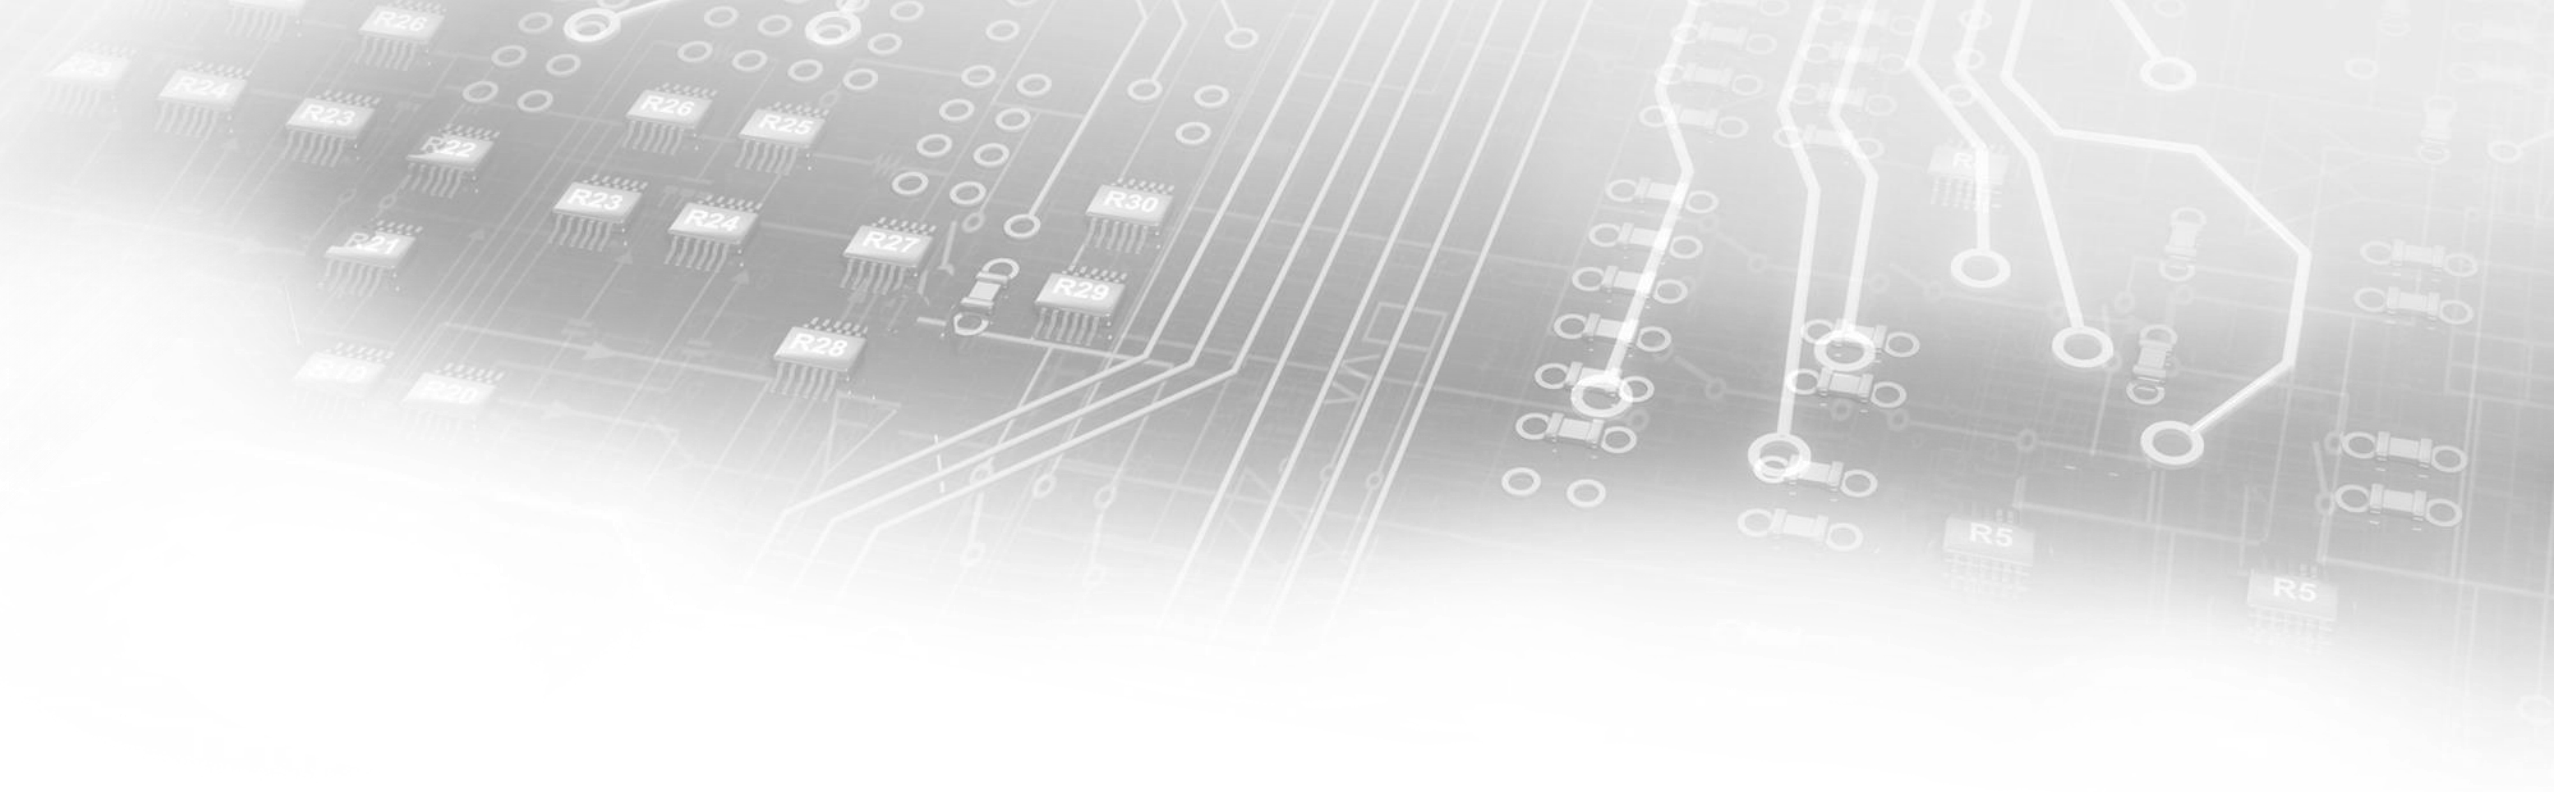

THANK YOU
