


# ITU-T SG15 Liaison Request



- ITU-T has created a bonding control protocol to control PME-PAF mapping (similar to LACP), but resides “under” the MAC
- Have requested the protocol use Slow Protocols format, and that 802.3 allocate a slow protocols subtype for this protocol

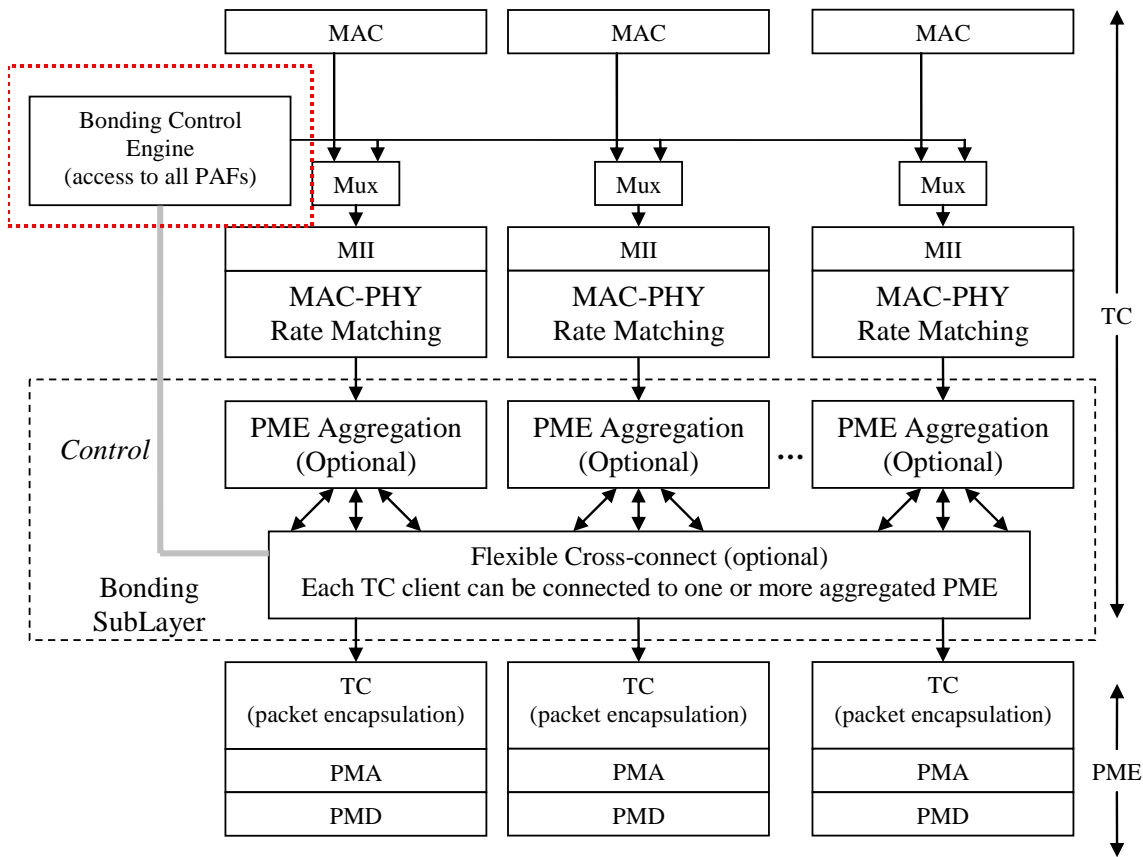

# Maintenance Change Required

- Proposed response require maintenance change approved for 802.3 to create new Slow Protocols subtype
  - Requires changing Table 4:
  - Change last row to 11-253 & 255
  - Add entry for 254 for Organization Specific
  - Add sentence that first 3-octets are an OUI, with rest of payload defined by OUI organization
- Maintenance change can addressed in 802.3ay REV

Table 43B-3—Slow Protocols subtypes

Protocol Subtype value	Protocol name
0	Unused—Illegal value
1	Link Aggregation Control Protocol (LACP)
2	Link Aggregation—Marker Protocol
3	Operations, Administration, and Maintenance (OAM)
4	Reserved for future use
5	Reserved for future use
6	Reserved for future use
7	Reserved for future use
8	Reserved for future use
9	Reserved for future use
10	Reserved for future use
11-255	Unused—Illegal values

# Motion

- Approve liaison response to ITU-T LS158 and request mover to submit appropriate comment against 802.3ay ballot.
- Moved: Glenn Parsons
- Second: Howard Frazier
- Approved by voice vote.