

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >
Title	STP Enhancements for optional FUSC and AMC zones for OFDMA PHY Layer
Date Submitted	2004-05-07
Source(s)	<p>Wonil Roh, Panyuh Joo, Jaeho Jeon wonil.roh@samsung.com panyuh@samsung.com</p> <p>Samsung Electronics Co., Ltd. jhjeon@samsung.com</p> <p>Dong Suwon P.O.Box 105 416, Maetan-3dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea 442-600</p>
Re:	Sponsor re-circulation Ballot
Abstract	STP enhancements for the optional AMC and FUSC with all subchannels for the downlink
Purpose	Adoption of proposed changes into P802.16e
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) <http://ieee802.org/16/ipr/patents/policy.html>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard."</p> <p>Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:r.b.marks@ieee.org> as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site <http://ieee802.org/16/ipr/patents/notices>.</p>

1 Introduction

This document describes the PHY enhancements to enable the space-time processing (STP) functionalities in the optional FUSC and the optional adjacent subcarrier permutation zones for OFDMA. The following features are proposed:

- Pilot and data allocation for 2 and 4-antenna BS in the optional FUSC and the optional AMC modes for DL
- Transmission schemes for open- and closed-loop STP with 2 and 4-antenna BS

2 Specific Text Changes

[Add a new section 8.4.8.3]

[After implementing all the relevant comments and reply comments, the renumbering of the following sections and the page numbers will be coherent.]

8.4.8.3 STP using the optional FUSC and the optional adjacent-subcarrier permutation zones for DL

Two optional modes for DL, the optional FUSC and the optional AMC modes, are described in 8.4.6.1.4 and 8.4.6.3, respectively. In both modes, pilot subcarriers are allocated first according to Table xxx in 8.4.6.1.4. The remaining subcarriers are used for data transmission.

8.4.8.3.1 Allocation of pilot subcarriers

For an STP-enabled BS with 2 or 4 antennas, pilot subcarriers are allocated to each antenna in one of the following two methods:

Method 1: use of disjoint pilot sets

Pilots are split into 2 or 4 disjoint sets. For 2-antenna BS, all pilots in the even symbols allocated for Ant 0 whereas all pilots in the odd symbols used for Ant 1. For 4-antenna BS, pilots in the even symbols are split for Ant 0 and 1, while those in the odd symbols split for Ant 2 and 3. See Figure yyy-1.

Method 2: use of orthogonal sequence on pilots

Pilots are shared with 2 or 4 antennas to increase the granularity and their orthogonality is maintained by the simple block code as shown in Figure yyy-2.

8.4.8.3.2 Allocation of data subchannels

In the optional FUSC mode for STP capable BS, transmit diversity (TD) users shall be allocated for two or four consecutive symbols in a row and the rest of subchannels shall be assigned for non-TD or other STP users such as spatial multiplexing (SM) users.

In the optional AMC mode, each data subchannel consists of 6 contiguous bins in the same band, thereby having one of four combinations as defined in 8.4.6.3. For STP capable BS with two antennas, however, each

TD user shall have one of two formats, 3x2 or 1x6. For BS with four antennas, depending on the transmission encoding scheme, bin structure can be any of four combinations.

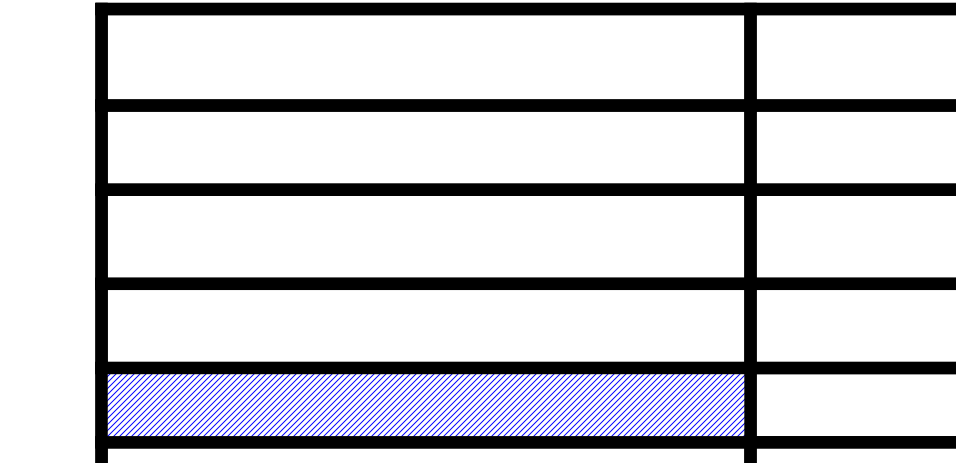


Figure vyy-1 Pilot allocation method #1

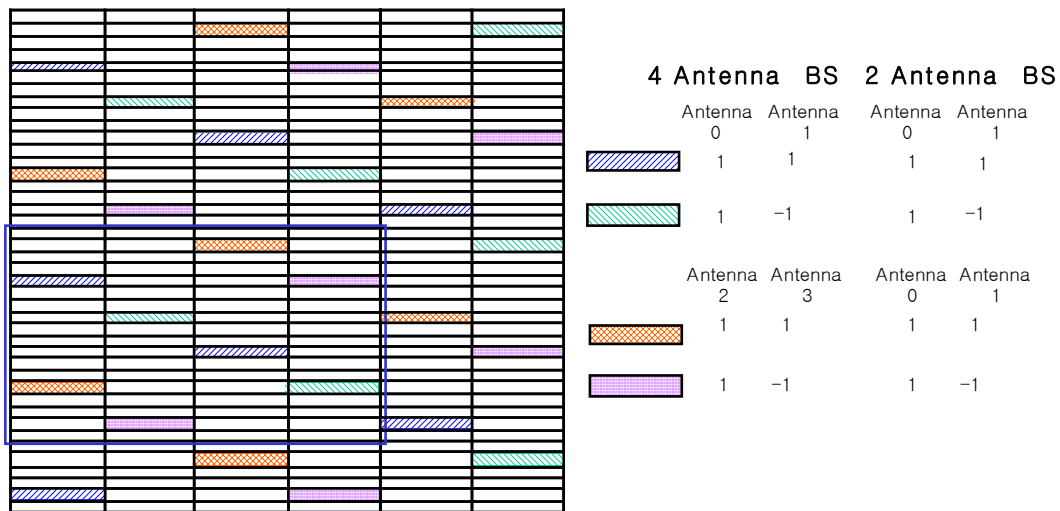


Figure vyy-2 Pilot allocation method #2

8.4.8.3.3 Transmission schemes for 2-antenna BS

8.4.8.3.3.1 Open loop encoding schemes for 2-antenna BS

Open-loop transmission encoding schemes for 2-antenna BS shall take one of the following two matrices:

$$A = \begin{bmatrix} s_1 & -s_2^* \\ s_2 & s_1^* \end{bmatrix} \text{ for TD users, } B = \begin{bmatrix} s_1 \\ s_2 \end{bmatrix} \text{ for SM users.}$$

8.4.8.3.3.2 Closed-loop encoding schemes for 2-antenna BS

Closed-loop STP shall be enabled with Fast COI Feedback. The information contained in COI can be the measured channel vector or matrix itself, or its covariance matrix \mathbf{R}_H , or beamforming weight vector \mathbf{w} , or the suggested combination of MIMO mode and permutation by SS. On receiving COI from SS, BS shall decide the most appropriate transmission scheme, which can be either singular value decomposition (SVD) method, transmit antenna array (TxAA) or any per-antenna rate control (PARC) variant. This is tabularized in Table xxx.

<u>Downlink</u>	<u>2-antenna BS</u>			<u>4-antenna BS</u>		
	<u>Open-loop</u>	<u>Closed-loop scheme and its feedback</u>		<u>Open-loop</u>	<u>Closed-loop scheme and its feedback</u>	
<u>1-antenna SS</u>	<u>STTD</u>	<u>TxAA</u>	<u>Channel vector \mathbf{h} or BF weight \mathbf{w}</u>	<u>O-STTD/ QO-STTD</u>	<u>TxAA</u>	<u>Channel vector \mathbf{h} or BF weight \mathbf{w}</u>
<u>2-antenna SS</u>	<u>STTD/ SM</u>	<u>TxAA/ SVD/ PARC variants</u>	<u>Channel matrix \mathbf{H}/ Channel matrix \mathbf{H} or \mathbf{R}_H/</u>	<u>O-STTD/ QO-STTD/ D-STTD/ SM</u>	<u>TxAA/ SVD/ PARC variants</u>	<u>Channel matrix \mathbf{H}/ Channel matrix \mathbf{H} or \mathbf{R}_H/</u>

Table xxx - Downlink MISO/MIMO transmission scheme

8.4.8.3.4 Transmission schemes for 4-antenna BS

8.4.8.3.4.1 Open-loop encoding schemes for 4-antenna BS

Open-loop STP with 4 BS antennas shall take one from the following four transmission matrices:

Orthogonal-STTD (O-STTD) with full (4th) diversity and 3/4 rate [2]

$$A = \begin{bmatrix} s_1 & -s_2^* & \frac{s_3^*}{\sqrt{2}} & \frac{s_3^*}{\sqrt{2}} \\ s_2 & s_1^* & \frac{s_3^*}{\sqrt{2}} & -\frac{s_3^*}{\sqrt{2}} \\ \frac{s_3}{\sqrt{2}} & \frac{s_3}{\sqrt{2}} & \frac{(-s_1 - s_1^* + s_2 - s_2^*)}{2} & \frac{(s_2 + s_2^* + s_1 - s_1^*)}{2} \\ \frac{s_3}{\sqrt{2}} & -\frac{s_3}{\sqrt{2}} & \frac{(-s_2 - s_2^* + s_1 - s_1^*)}{2} & \frac{(-s_1 - s_1^* - s_2 + s_2^*)}{2} \end{bmatrix} \vdots$$

Quasi-orthogonal STTD (QO-STTD) for 2nd order diversity and rate 1 [3]

$$B = \begin{bmatrix} s_1 & -s_2^* & s_3 & -s_4^* \\ s_2 & s_1^* & s_4 & s_3^* \\ s_3 & -s_4^* & s_1 & -s_2^* \\ s_4 & s_3^* & s_2 & s_1^* \end{bmatrix} \vdots$$

Double-STTD (D-STTD) for 2nd order diversity and rate 1

$$C = \begin{bmatrix} s_1 & -s_2^* & s_5 & -s_7^* \\ s_2 & s_1^* & s_6 & -s_8^* \\ s_3 & -s_4^* & s_7 & s_5^* \\ s_4 & s_3^* & s_8 & s_6^* \end{bmatrix} \cdot \underline{i}$$

Spatial multiplexing (SM) with rate 4

$$D = \begin{bmatrix} s_1 \\ s_2 \\ s_3 \\ s_4 \end{bmatrix} \cdot \underline{i}$$

8.4.8.3.4.2 Closed-loop encoding schemes for 4-antenna BS

Closed-loop STP shall be enabled with Fast CQI Feedback. The information contained in CQI can be the measured channel vector or matrix itself, or its covariance matrix \mathbf{R}_H , or beamforming weight vector \mathbf{w} , or the suggested combination of MIMO mode and permutation by SS. On receiving CQI from SS, BS shall decide the most appropriate transmission scheme, which can be either singular value decomposition (SVD) method, transmit antenna array (TxAA) or any per-antenna rate control (PARC) variant [4]. This is tabularized in Table yyy-3.

References:

- [1] IEEE P802.16-REVe/D2-2004 Amendment for Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Band
- [2] Tarokh et al, "Space-time block coding for wireless communications: Performance results", IEEE JSAC, vol. 17, No. 3, Mar 1999, pp.451--460
- [3] Jafarkhani, "A quasi-orthogonal space-time block code", IEEE Trans. Commun. Vol. 49, no. 1, Jan. 2001, pp. 1--4
- [4] Lucent, "Increasing MIMO throughput with per-antenna rate control." 3GPP TSG_R WG1 document, TSGR1(01)087