

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	A MAP IE for H-ARQ and SDMA Allocation in AAS Zone	
Date Submitted	2005-01-18 24	
Source(s)	InSeok Hwang, Jaehee Cho, Seungj Maeng, JangHoon Yang, Hoon Huh, SangHoon Sung, Jaeho Jeon, Soonyoung Yoon Samsung Electronics, Inc.	is91.hwang@samsung.com
	Ran Yaniv, Tal Kaitz, Danny Stopler, Naftali Chayat, Vladimir Yanover Alvarion Ltd.	ran.yaniv@alvarion.com
	Dave Pechner, Doug Dahlby, Todd Chauvin ArrayComm Inc.	dpechner@arraycomm.com
Re:	Call for reply comments (Original Comment # 2189)	
Abstract	A new efficient Normal MAP IE supporting for Hybrid ARQ and SDMA allocation in AAS zone is proposed.	
Purpose	Adoption in IEEE 802.16e_D6	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

A MAP IE for H-ARQ and SDMA Allocation in AAS Zone

Introduction

In the current text, there is no efficient way to support Hybrid ARQ and SDMA allocations in AAS zone simultaneously. The operation scenario of the current schemes for SDMA allocation and Hybrid ARQ is as follows

- 1) H-ARQ pointer IE in (compressed) DL MAP to H-ARQ MAP
- 2) First PHY_MOD_IE in H-ARQ MAP (undefined yet) to specify the first SDMA preamble
 - Describe absolute 2D (DL) / 1D (UL) burst allocation regions
 - Describe the corresponding H-ARQ related IEs for each region
- 3) Second PHY_MOD_IE in H-ARQ MAP to specify the second SDMA preamble
 - Describe absolute 2D (DL) / 1D (UL) burst allocation regions
 - Describe the corresponding H-ARQ related IEs for each region
- 4) ...

Thus, we can find out that bandwidth allocation overhead linearly increases as the number of SDMA users. Also, the number of PHY_MOD_IEs can be up to the maximum number of reused beams.

Proposed Solution

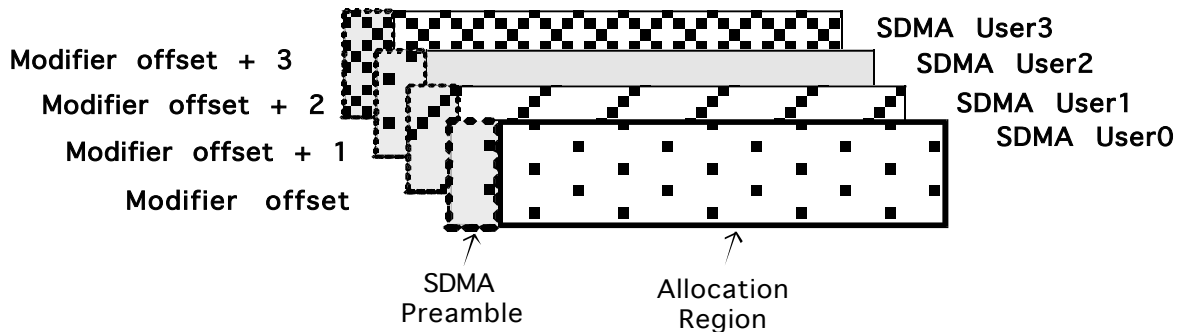


Fig. 1. Proposed SDMA Allocation Scenario

The burst allocation region of SDMA users can be fixed for scheduling simplicity and lower signaling overhead. In addition, modifier index for SDMA preamble can be extracted from description order of SDMA users. The proposed solution can be summarized as follows

- 1) Introduce Extended IUC in DL/UL MAP for SDMA allocation (Currently not available yet)
- 2) Use '1' of '5' reserved bits in AAS_IE() to specify modifier type, "Time" or "Freq." shift
- 3) Describe the shared 2D (DL) or 1D (UL) allocation regions
 - Specify {CID, modulation/coding schemes (IUC or H-ARQ)} fields

- Implicitly assign SDMA preamble index with description order of CIDs. Due to limited length of Extended IUC, starting offset of preamble modifier is included.
- Optionally include CQICH/ACKCH allocation IE for DL burst and uplink power adjustment IE.
- **Optionally specify pilot patterns for SDMA users**

4) Use a pointer IE for special Sub Map including the all information elements described above.

In this contribution, a new Normal MAP IE including the features 1) ~ 3) is proposed. Note that the mechanism supporting the feature 4) is a general MAC issue and is to be considered in other contributions (For example, see Sub Map mechanism in C80216e-05_23, Normal MAP Extension for H-ARQ)

Suggested Text Changes

[Add “Preamble Type Bit” into AAS_DL_IE in Sec. 8.4.5.3.3 and AAS_UL_IE in Sec. 8.4.5.4.6]

AAS_DL_IE in Sec. 8.4.5.3.3

Syntax	Size (bits)	Notes
AAS_DL_IE(){		
Extended DIUC	4	AAS = 0x02
Length	4	Length in bytes of following fields (0x03)
Permutation	2	0b 00 = PUSC 0b 01 = FUSC 0b 10 = Optional FUSC 0b 11 = AMC Permutation
DL PermBase	6	PermBase for AAS DL Zone
Symbol Offset	8	AAS zone starting offset referenced from DL frame preamble
AAS DL Preamble indication	2	0b 00 – 0 symbols 0b 01 – 1 symbols 0b 10 – 2 symbols 0b 11 – 3 symbols
<u>Preamble Type</u>	<u>1</u>	<u>0 – Frequency shifted preamble is used in this AAS zone</u> <u>1 – Time shifted preamble is used in this AAS zone</u>
Padding	6 <u>5</u>	
}		

AAS_UL_IE in Sec. 8.4.5.4.6

Syntax	Size (bits)	Notes
AAS_UL_IE(){		
Extended UIUC	4	AAS = 0x03
Length	4	Length in bytes of following fields (0x04)
Permutation	2	0b 00 = PUSC 0b 01 = FUSC 0b 10 = AMC Permutation 0b 11 = Reserved

UL PermBase	7	PermBase for AAS UL Zone
Symbol Offset	8	AAS zone starting offset referenced from 'Allocation Start Time' in the UL-MAP
AAS zone length	8	Number of OFDMA symbols in AAS zone
AAS UL Preamble indication	2	0b 00 – 0 symbols 0b 01 – 1 symbols 0b 10 – 2 symbols 0b 11 – 3 symbols
Preamble Type	1	0 – Frequency shifted preamble is used in this AAS zone 1 – Time shifted preamble is used in this AAS zone
Padding	5 4	
}		

[Create a new AAS_H-ARQSDMA_DL_IE in Sec. 8.4.5.3.x and AAS_H-ARQSDMA_UL_IE in Sec. 8.4.5.4.x]

[AAS_H-ARQSDMA_DL_IE](#) in Sec. 8.4.5.3.x

Syntax	Size (bit)	Notes
AAS_H-ARQSDMA_DL_IE {		
Extended DIUC	4	AAS_H-ARQSDMA_DL_IE = 0x ??
Length	4	Length in bytes of following fields
Num Burst Region	4	
For (ii = 1: Num Region) {		
OFDMA symbol offset	8	Starting symbol offset referenced to DL preamble of the downlink frame specified by the Frame Offset
If (Permutation = 0b11) {		For the AMC permutation (2 x 3 type)
_____ Subchannel offset	8 bits	
_____ No. OFDMA triple symbol	5 bits	Number of OFDMA symbols is given in multiples of 3 symbols
_____ No. subchannels	6 bits	
Else {		
_____ Subchannel offset	6 bits	
_____ No. OFDMA Symbols	7 bits	
_____ No. subchannels	6 bits	
_____ Subchannel offset	8 bits	
_____ No. of OFDMA symbols	8	
_____ No. of subchannels	7	
_____	7	
}		
Number of Users	3	SDMA users for the assigned region
If (AAS DL Preamble Used) {		
Preamble Modifier Index Offset	3	Starting offset of preamble modifier for SDMA users

}		
For ($i=1$: Num_Users) {		
RCID12	12	LSB 12 bit of CID
Encoding Mode	2	00: No H-ARQ 01: H-ARQ Chase Combining 10: H-ARQ Incremental Redundancy 11: Reserved
COICH Allocation	1	0: Not Included 1: Included
ACKCH Allocation	1	0: Not Included 1: Optionally included for H-ARQ users
ACKCH Allocation Pilot Pattern Modifier	1	0: Not Included 1: Applied 0: Not Included 1: Applied <u>Optionally included for H-ARQ users</u>
If (Pilot Pattern Modifier) {		
Pilot Pattern	2	See sections 8.4.6.3.2 and 8.4.6.3.3 00: Pattern #A , 01: Pattern #B 10: Pattern #C , 11: Pattern #D
}		
{		
If (Mode == 00) {		
DIUC	4	
Repetition Coding Indication	2	00: No repetition 01: Repetition of 2 10: Repetition of 4 11: Repetition of 6
}		
else if (Mode == 01) {		
If (ACKCH Allocation) {		
ACK CH Index	5	0b xxxx0 for the first half slot for ACK signaling 0b xxxx1 for the second half slot for ACK signaling where xxxx denotes slot index within ACKCH region
}		
DIUC	4	
Repetition Coding Indication	2	00: No repetition 01: Repetition of 2 10: Repetition of 4 11: Repetition of 6
ACID	4	
AI SN	1	
}		
else if (Mode == 10) {		
If (ACKCH Allocation) {		

<u>ACK CH Index</u>	<u>5</u>	<u>0b xxxx0 for the first half slot for ACK signaling</u> <u>0b xxxx1 for the second half slot for ACK signaling</u> <u>where xxxx denotes slot index within ACKCH region</u>
<u>}</u>		
<u>N_{EP}</u>	<u>4</u>	
<u>N_{SCH}</u>	<u>4</u>	<u>Indicator for the number of first slots used for data</u> <u>encoding in this SDMA allocation region</u>
<u>SPID</u>	<u>2</u>	
<u>ACID</u>	<u>4</u>	
<u>AI SN</u>	<u>1</u>	
<u>}</u>		
<u>If (COICH Allocation Included) {</u>		
<u>Allocation index</u>	<u>6</u>	
<u>Reporting period</u>	<u>2</u>	
<u>Frame offset</u>	<u>3</u>	
<u>Reporting duration</u>	<u>4</u>	
<u>}</u>		
<u>}</u>		<u>End of User loop</u>
<u>}</u>		<u>End of Burst Region Loop</u>
<u>Padding</u>	<u>variable</u>	
<u>}</u>		

AAS SDMA UL IE in Sec. 8.4.5.4.x

Syntax	Size (bit)	Notes
<u>AAS_SDMA_UL_IE</u> {		
<u>Extended UIUC</u>	<u>4</u>	<u>AAS_SDMA_UL_IE = 0x ??</u>
<u>Length</u>	<u>4</u>	<u>Length in bytes of following fields</u>
<u>Num Burst Region</u>	<u>4</u>	
<u>For (ii = 1: Num Region) {</u>		
<u>Slot offset</u>	<u>12</u>	<u>Starting slot offset in AAS zone referenced to right after UL AAS preamble</u>
<u>Slot duration</u>	<u>10</u>	
<u>Number of Users</u>	<u>3</u>	<u>SDMA users for the assigned region</u>
<u>If (AAS UL Preamble Used) {</u>		
<u>Preamble Modifier Index Offset</u>	<u>3</u>	<u>Starting offset of preamble modifier for SDMA users</u>
<u>}</u>		
<u>Pilot Pattern Modifier</u>		<u>±</u>
<u>0: Not Applied</u>		
<u>±: Applied</u>		
<u>-If (Pilot Pattern Modifier) {</u>		
<u>Pilots per beam</u>		
<u>Pilot Pattern</u>		<u>±</u>
<u>See sections 8.4.8.1.5 (Fig. 249) and 8.4.6.3.3</u>		
<u>00: Pattern #A , 01: Pattern #B</u>		
<u>10: Pattern #C , 11: Pattern #D</u>		
<u>}</u>		
<u>For (jj = 1: Num Users) {</u>		
<u>RCID12</u>	<u>12</u>	<u>LSB 12 bit of CID</u>
<u>Encoding Mode</u>	<u>2</u>	<u>00: No H-ARQ</u> <u>01: H-ARQ Chase Combining</u> <u>10: H-ARQ Incremental Redundancy</u> <u>11: Reserved</u>
<u>Power Adjust</u>	<u>1</u>	<u>0: Not Included</u> <u>1: Included, Signed integer in 0.25 dB Unit</u>
<u>Pilot Pattern Modifier</u>	<u>1</u>	<u>0: Not Applied</u> <u>1: Applied</u>
<u>-If (Pilot Pattern Modifier) {</u>		<u>Pilots per beam</u>
<u>Pilot Pattern</u>	<u>2</u>	<u>See sections 8.4.8.1.5 (Fig. 249) and 8.4.6.3.3</u> <u>00: Pattern #A , 01: Pattern #B</u> <u>10: Pattern #C , 11: Pattern #D</u>
<u>}</u>		

<u>If (Mode == 00) {</u>		
<u>DIUC</u>	<u>4</u>	
<u>Repetition Coding Indication</u>	<u>2</u>	<u>00: No repetition</u> <u>01: Repetition of 2</u> <u>10: Repetition of 4</u> <u>11: Repetition of 6</u>
<u>}</u>		
<u>else if (Mode == 01) {</u>		
<u>DIUC</u>	<u>4</u>	
<u>Repetition Coding Indication</u>	<u>2</u>	<u>00: No repetition</u> <u>01: Repetition of 2</u> <u>10: Repetition of 4</u> <u>11: Repetition of 6</u>
<u>ACID</u>	<u>4</u>	
<u>AI SN</u>	<u>1</u>	
<u>}</u>		
<u>else if (Mode == 10) {</u>		
<u>N_{EP}</u>	<u>4</u>	
<u>N_{SCH}</u>	<u>4</u>	<u>Indicator for the number of first slots used for data encoding in this SDMA allocation region</u>
<u>SPID</u>	<u>2</u>	
<u>ACID</u>	<u>4</u>	
<u>AI SN</u>	<u>1</u>	
<u>}</u>		
<u>If (Power Adjust Included) {</u>		
<u>Power adjustment</u>	<u>8</u>	<u>Signed integer in 0.25 dB Unit</u>
<u>}</u>		
<u>}</u>		<u>End of User loop</u>
<u>}</u>		<u>End of Burst Region Loop</u>
<u>Padding</u>	<u>variable</u>	
<u>}</u>		

8.4.6.3.2 AMC support for SDMA

The pilots in an AMC AAS zone are regarded as part of the allocation, and as such shall be beamformed in a way that is consistent with the transmission of the allocation's data subcarriers. In an SDMA region, the pilots of each allocation may correspond to a different pilot pattern. A pilot pattern consists of location and polarity. The pilot patterns are depicted in figure XXX. Data subcarriers shall be punctured to obtain patterns #2 and #3. Subcarriers shall only be punctured if there is an allocation associated with the corresponding pattern, as described in the AAS SDMA DL IE() and AAS SDMA UL IE(). Only MSSs that support all four pilot patterns, as indicated by their capability in 11.8.3.7.X, shall be assigned allocations in an SDMA region where pilot patterns #2 and #3 are used. Data subcarriers shall be punctured after constellation mapping in the case of CC encoding, and prior to constellation

2. Change text on page 618 lines 5-9 of 802.16-2004, to the following text

$$\begin{aligned} \operatorname{Re}\{c_k\} &= \frac{8}{3} \left(\frac{1}{2} - w_k \right) \cdot p_k \\ \operatorname{Im}\{c_k\} &= 0 \end{aligned} \quad (135)$$

where p_k is the pilot's polarity (as described in section 8.4.6.3.2) for SDMA allocations in AMC AAS zone, and $p_k = 1$ otherwise.

11.8.3.7.X SDMA Pilot capability

Type	Length	Value	Scope
<u>YYY</u>	<u>1</u>	<p><u>Bit #0-#1: SDMA pilot pattern support for AMC zone:</u></p> <p><u>0b00 – no support</u></p> <p><u>0b01 – support SDMA pilot patterns #A and #B</u></p> <p><u>0b11 – support all SDMA pilot patterns</u></p> <p><u>0b10 – reserved</u></p> <p><u>Bit #2-#3: SDMA pilot pattern support for PUSC-ASCA zone:</u></p> <p><u>0b00 – no support</u></p> <p><u>0b01 – support SDMA pilot patterns #A and #B</u></p> <p><u>0b11 – support all SDMA pilot patterns</u></p> <p><u>0b10 – reserved</u></p> <p><u>Bits #4-#7: Reserved</u></p>	<p><u>SBC-REQ</u></p> <p><u>SBC-RSP</u></p>

AAS_H_ARQ_UL_IE in Sec. 8.4.5.4.x

Syntax	Size (bit)	Notes
<u>AAS_H_ARQ_UL_IE()</u>		
<u>Extended UIUC</u>	<u>4</u>	<u>AAS_H_ARQ_UL_IE = 0x ??</u>
<u>Length</u>	<u>4</u>	<u>Length in bytes of following fields</u>
<u>Slot offset</u>	<u>12</u>	<u>Starting slot offset in AAS zone referenced to right after UL AAS preamble</u>
<u>Slot duration</u>	<u>10</u>	
<u>Number of Users</u>	<u>3</u>	<u>SDMA users for the assigned region</u>
<u>Preamble Modifier Index Offset</u>	<u>3</u>	<u>Starting offset of preamble modifier for SDMA users</u>
<u>For (ii = 1: Num_Users) {</u>		
<u>—RCID12</u>	<u>12</u>	<u>LSB 12 bit of CID</u>

Encoding Mode	2	00: No H-ARQ 01: H-ARQ Chase Combining 10: H-ARQ Incremental Redundancy 11: Reserved
— Power Adjust	1	0: Not Included 1: Included; Signed integer in 0.25 dB Unit
— If (Mode == 00) {		
— DIUC	4	
Repetition Coding Indication	2	00: No repetition 01: Repetition of 2 10: Repetition of 4 11: Repetition of 6
— }		
— else if (Mode == 01) {		
— DIUC	4	
Repetition Coding Indication	2	00: No repetition 01: Repetition of 2 10: Repetition of 4 11: Repetition of 6
— ACID	4	
— AL_SN	1	
— }		
— else if (Mode == 10) {		
— N _{EP}	4	
N _{SCH}	4	Indicator for the number of first slots used for data encoding in this SDMA allocation region
— SPID	2	
— ACID	4	
— AL_SN	1	
— }		
If (Power Adjust Included) {		
— Power adjustment	8	Signed integer in 0.25 dB Unit
}		
}		End of User loop
Padding	variable	
}		