

Project	IEEE 802.16 Broadband Wireless Access Working Group < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	Subscriber Mode Management	
Date Submitted	2005-07-11	
Source(s)	Yun Won Chung, PhD Jee Hyeon Na, Sang Ho Lee, PhD ETRI, 161, Gajeong-dong, Yuseong-gu, Daejeon, 305-700, Korea	<a href="mailto:yun.chung@etri.re.kr">yun.chung@etri.re.kr</a> <a href="mailto:jhna@etri.re.kr">jhna@etri.re.kr</a> <a href="mailto:leesh@etri.re.kr">leesh@etri.re.kr</a> Voice: +82-42-860-5244 Fax: +82-42-861-1966
Re:	Call for Comment on P802.16g Baseline Document	
Abstract	This contribution proposes subscriber mode management.	
Purpose	The document should be considered during the resolution of comments on the baseline document.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.	

# Subscriber Mode Management

Yun Won Chung, Jee Hyeon Na, and Sang Ho Lee

ETRI, Korea

## Problem Statement

In this contribution, we summarize subscriber mode management at an MSS, a BS, and an NCMS, and introduce currently defined service primitives for subscriber mode management between a BS and an NCMS, which are exchanged through Control Service Access Point (C-SAP) of Management Plane specified in IEEE 802.16g baseline document.

## Summary of the Proposed Remedy

Currently, three subscriber modes are defined, i.e., Active, Sleep, and Idle Modes. In Active Mode, an MSS transmits and receives packets to/from a BS. Sleep Mode is intended to minimize an MS power usage and decrease usage of serving BS air interface resources by pre-negotiated periods of absence from the serving BS air interface. Idle Mode allows an MSS to become periodically available for DL broadcast traffic without registration at a specific BS as the MSS traverses an air link environment populated by multiple BSs, and thus, allows the MSS to conserve power and operational resources.

Sleep Mode operation is defined between an MSS and a BS only, and an NCMS does not need to manage Sleep Mode of subscriber. Thus, both an MSS and a BS manage all Active, Sleep, and Idle Modes of subscriber. On the other hand, an NCMS manages Active and Idle Modes. In this contribution, Subscriber Mode transitions at an MSS, a BS, and an NCMS are modeled and described, as shown in Figs. 1 and 2.

Figure 1 shows Subscriber Mode transition diagram at both an MSS and a BS. Subscriber Mode at both an MSS and a BS changes from Active Mode to Idle Mode when the MSS issues an MSS De-registration Request (DREG-REQ) message with De-Registration\_Request\_Code=0x01 or the BS issues an De-register Command (DREG-CMD) message with Action Code = 0x05. Then, the MSS stays at Idle Mode and updates its location when the paging group changes. The Subscriber Mode returns back to Active Mode from Idle Mode after completing Network re-entry. Transition from Active Mode to Sleep Mode is performed after an MSS successfully exchanges Sleep Request (MOB\_SLP-REQ) and Sleep Response (MOB\_SLP-RSP) messages with a BS. If there is any DL traffic toward an MSS from a BS, MOB\_TRF-IND is broadcast to the MSS from the BS and Subscriber Mode of the MSS and the BS changes from Sleep Mode to Active Mode. If there is any UL traffic from an MSS, Bandwidth Request (BW Request) is sent to the serving BS from the MSS and Subscriber Mode of the MSS and the BS changes from Sleep Mode to Active Mode, too.

Figure 2 shows Subscriber Mode transition diagram at an NCMS with service primitives related with the Subscriber Mode transition. Subscriber Mode transition from Active Mode to Idle Mode is performed by exchanging Idle\_mode\_initiation.request and Idle\_mode\_initiation.response between a BS and an NCMS after successful DREG-REQ message with De-Registration\_Request\_Code=0x01 or DREG-CMD message with Action Code = 0x05 between an MSS and a BS, where Idle\_mode\_initiation.request and Idle\_mode\_initiation.response are defined in 14.5.11.1 and 14.5.11.2, respectively. Subscriber Mode transition from Idle Mode to Active Mode is initiated after exchanging Paging\_announce, Idle\_ReEntry.indication, and Idle\_ReEntry.confirmation between a BS and an NCMS, where Paging\_announce, Idle\_ReEntry.indication, and Idle\_ReEntry.

confirmation are defined in 14.5.11.3, 14.5.11.4, and 14.5.11.5, respectively.

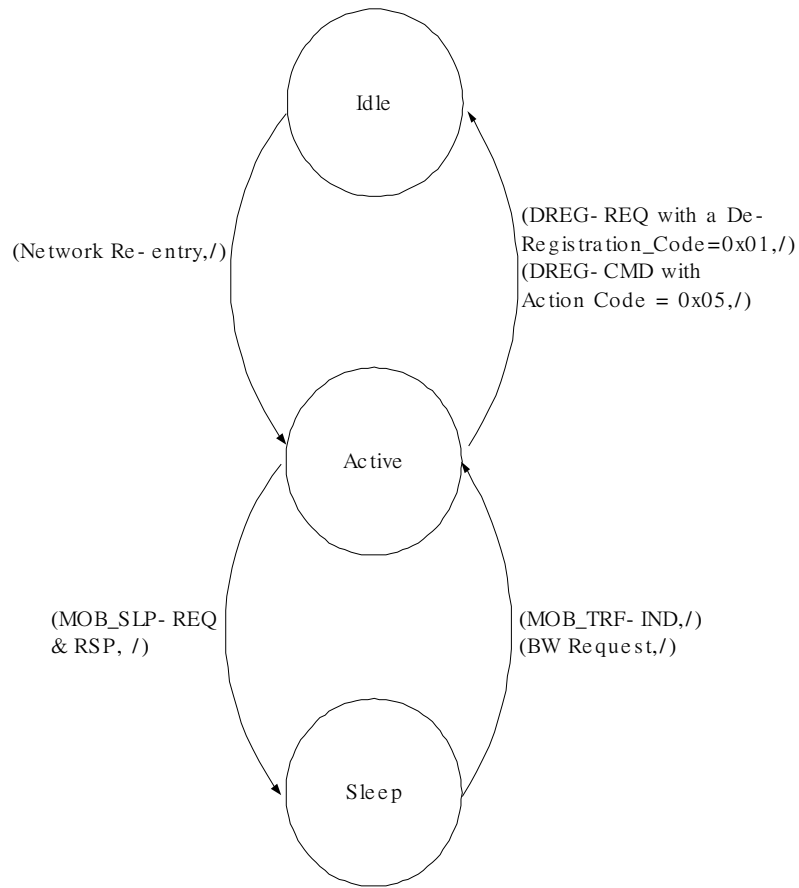


Fig. 1- Subscriber Mode transition diagram at an MSS and a BS

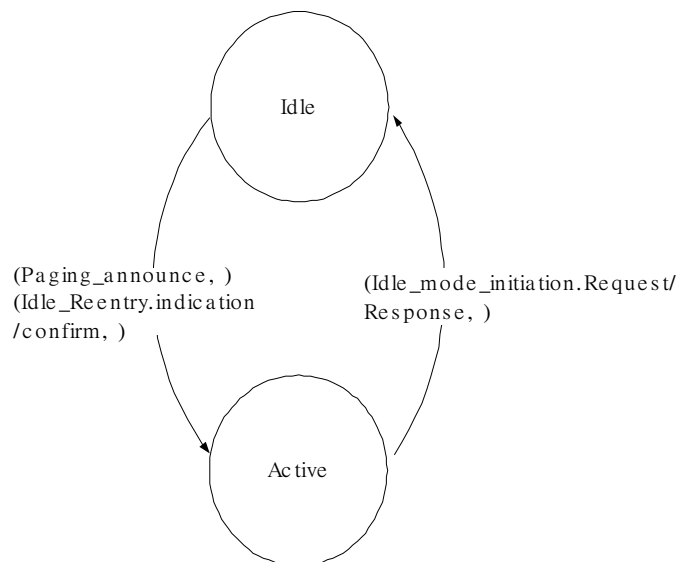


Fig. 2 - Subscriber Mode transition diagram at an NCMS

**Proposed Text Changes**

[Modify section 14.5.7 as follow]

## 14.5.7 Subscriber Mode Management

### 14.5.7.1 Managing Device States

Currently, three subscriber modes are defined, i.e., Active, Sleep, and Idle Modes. In Active Mode, an MSS transmits and receives packets to/from a BS. Sleep Mode is intended to minimize an MSS power usage and decrease usage of serving BS air interface resources by pre-negotiated periods of absence from the serving BS air interface. Idle Mode allows an MSS to become periodically available for DL broadcast traffic without registration at a specific BS as the MSS traverses an air link environment populated by multiple BSs, and thus, allows the MSS to conserve power and operational resources.

Sleep Mode operation is defined between an MSS and a BS only, and an NCMS does not manage Sleep Mode of subscriber. Thus, both an MSS and a BS manage all Active, Sleep, and Idle Modes of subscriber. On the other hand, an NCMS manages Active and Idle Modes. In this contribution, Subscriber Mode transitions at an MSS, a BS, and an NCMS are modeled and described, as shown in Figs. 3 and 4.

Figure 3 shows Subscriber Mode transition diagram at both an MSS and a BS. Subscriber Mode at both an MSS and a BS changes from Active Mode to Idle Mode when the MSS issues an MSS De-registration Request (DREG-REQ) message with `De-Registration_Request_Code=0x01` or the BS issues a De-register Command (DREG-CMD) message with `Action Code = 0x05`. Then, the MSS stays at Idle Mode and updates its location when the paging group changes. The Subscriber Mode returns back to Active Mode from Idle Mode after completing Network re-entry. Transition from Active Mode to Sleep Mode is performed after an MSS successfully exchanges Sleep Request (MOB\_SLP-REQ) and Sleep Response (MOB\_SLP-RSP) messages with a BS. If there is any DL traffic toward an MSS from a BS, MOB\_TRF-IND is broadcast to the MSS from the BS and Subscriber Mode of the MSS and the BS changes from Sleep Mode to Active Mode. If there is any UL traffic from an MSS, Bandwidth Request (BW Request) is sent to the serving BS from the MSS and Subscriber Mode of the MSS and the BS changes from Sleep Mode to Active Mode, too.

Figure 4 shows Subscriber Mode transition diagram at an NCMS with service primitives related with the Subscriber Mode transition. Subscriber Mode transition from Active Mode to Idle Mode is performed by exchanging `Idle_mode_initiation.request` and `Idle_mode_initiation.response` between a BS and an NCMS after successful DREG-REQ message with `De-Registration_Request_Code=0x01` or DREG-CMD message with `Action Code = 0x05` between an MSS and a BS, where `Idle_mode_initiation.request` and `Idle_mode_initiation.response` are defined in 14.5.11.1 and 14.5.11.2, respectively. Subscriber Mode transition from Idle Mode to Active Mode is initiated after exchanging `Paging_announce`, `Idle_ReEntry.indication`, and `Idle_ReEntry.confirmation` between a BS and an NCMS, where `Paging_announce`, `Idle_ReEntry.indication`, and `Idle_ReEntry.confirmation` are defined in 14.5.11.3, 14.5.11.4, and 14.5.11.5, respectively.

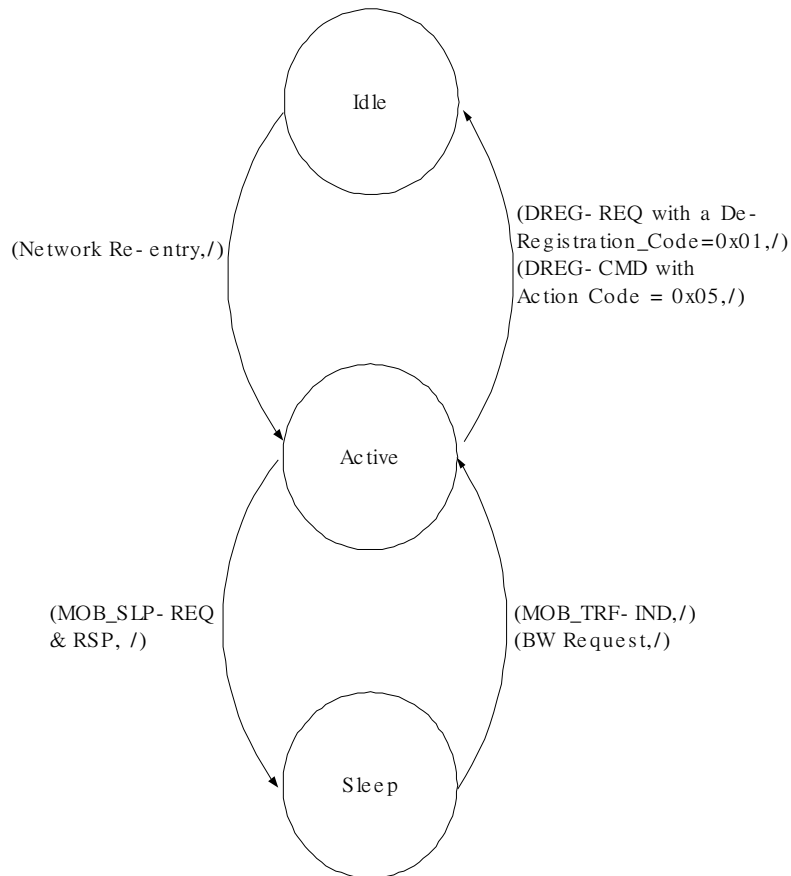


Fig. 3 - Subscriber Mode transition diagram at MSS and BS

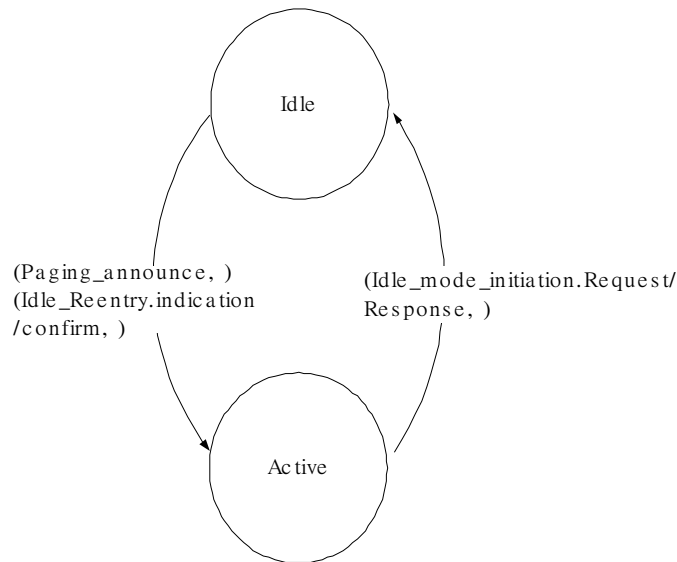


Fig. 4 - Subscriber Mode transition diagram at NCMS

**References**

- [1] IEEE 802.16e/D9
- [2] IEEE 802.16g-04/03r3, "Baseline Document – P802.16g Management Plane Procedures and Services"
- [3] IEEE Std 802-16-2004