

EPoC Upstream



Ed Boyd, Xingtera

Supporters :

Avi Kliger, Broadcom

Ryan Hirth, Broadcom

Hesham ElBakoury, Huawei

Duane Remein, Huawei



Upstream Burst Options

- This presentation looks at 3 different options for the EPoC upstream and evaluates the overhead.
 - Unaligned TDMA
 - No symbol alignment for transmitter.
 - Single Transmitter per symbol.
 - Aligned TDMA
 - CNU transmitters are all phase aligned to the CLT PHY's FFT boundary.
 - Single Transmitter per symbol.
 - OFDMA with 1D-2D translation
 - CNU transmitters are all phase aligned to the CLT PHY's FFT boundary.
 - Multiple Transmitters per symbol
- A Solution for the OFDMA with 1D-2D translation is presented.

Unaligned TDMA




- **Unaligned TDMA would require preamble symbols so the CLT receiver could align to symbol boundaries.**
 - In G.Hn coax, it is multiple symbols of overhead.
- **Channel Estimation Symbols**
 - Channel Estimation Symbols allow for measurement of the channel.
- **Symbol End**
 - The end of the burst must be on a symbol boundary so the finest granularity for burst size is a single symbol.
- **Overhead Costs**
 - A low-end estimate is 3 symbols of overhead for preamble/channel estimation.
 - With 20us symbols at 1Gbps; it is 7,500 Bytes of Burst overhead with a granularity of 2,500 Bytes (much high than EPON 192 Bytes of burst overhead and 2 bytes of granularity)
 - With 40us symbols at 1Gbps; it is 15,000 Bytes of Burst overhead with a granularity of 5,000 Bytes (much high than EPON 192 Bytes of burst overhead and 2 bytes of granularity)
 - Time Interleaving would make these numbers much worse and couldn't be supported.

Overhead is very high for unaligned TDMA




Aligning TDMA: PLC Ranging

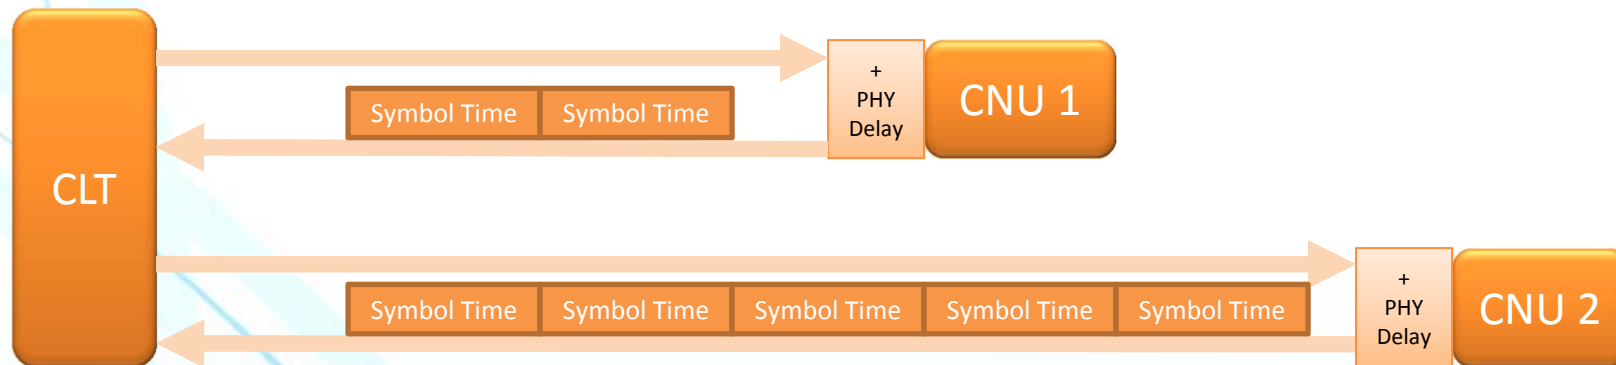

- All CNU receive symbol start reference time from downstream PLC.
- PLC Link Up procedure adds delay per CNU so PHY symbol times are aligned at CLT Receiver.
- With known symbol timing at receiver, the preamble can be eliminated.
- All CNU PHY will start/stop bursts at Symbol Boundaries
 - Ethernet MAC is not aligned to symbol boundaries and will start and stop transmissions without regard to PHY symbol time.




Aligned TDMA: MAC Bursts in PHY Symbols

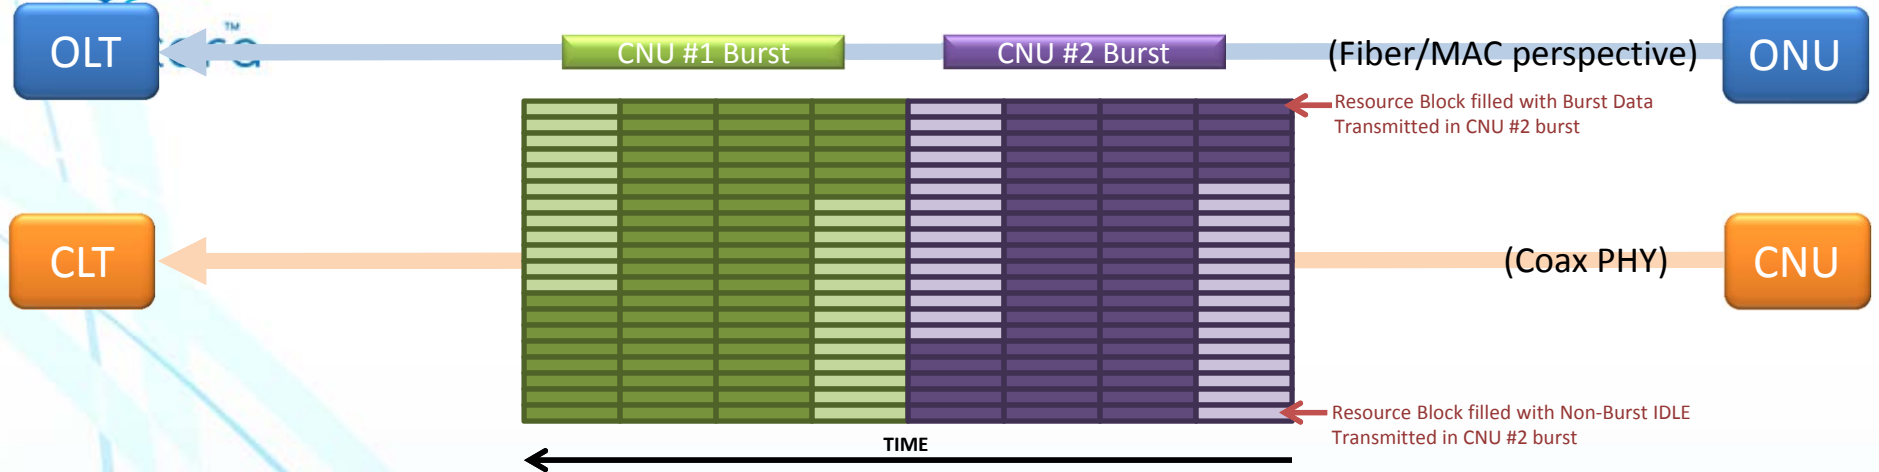

- Spacing Bursts at MAC Layer by more than 1 symbol guarantees that 2 bursts will not share a symbol.
 - Bursts from the MAC are not required to be multiples of symbol times long
 - Bursts from the MAC are not required to start or stop on symbol boundaries.
 - Simple configuration at MAC Layer to accommodate minimum spacing of 1 symbol time
 - Granularity of burst size is based on Resource Block Size (the symbol size is only important for spacing)
- MAC Layer burst timing is preserved across Coax PHY
 - If a CNU burst from the MAC layer starts during a symbol time, the CNU will transmit on all sub-carriers in the symbol.
 - The symbol will contain "Burst Data Symbols" (Preamble, Data, IPG) or a newly defined "Non-Burst IDLE Character".
 - Non-Burst IDLE characters fill in the portion of the symbol NOT occupied by the CNU burst.
 - The start/end position of the burst from the MAC is preserved by the "Burst Data Symbols" position in the data stream.


Aligned TDMA: Adding Interleaving

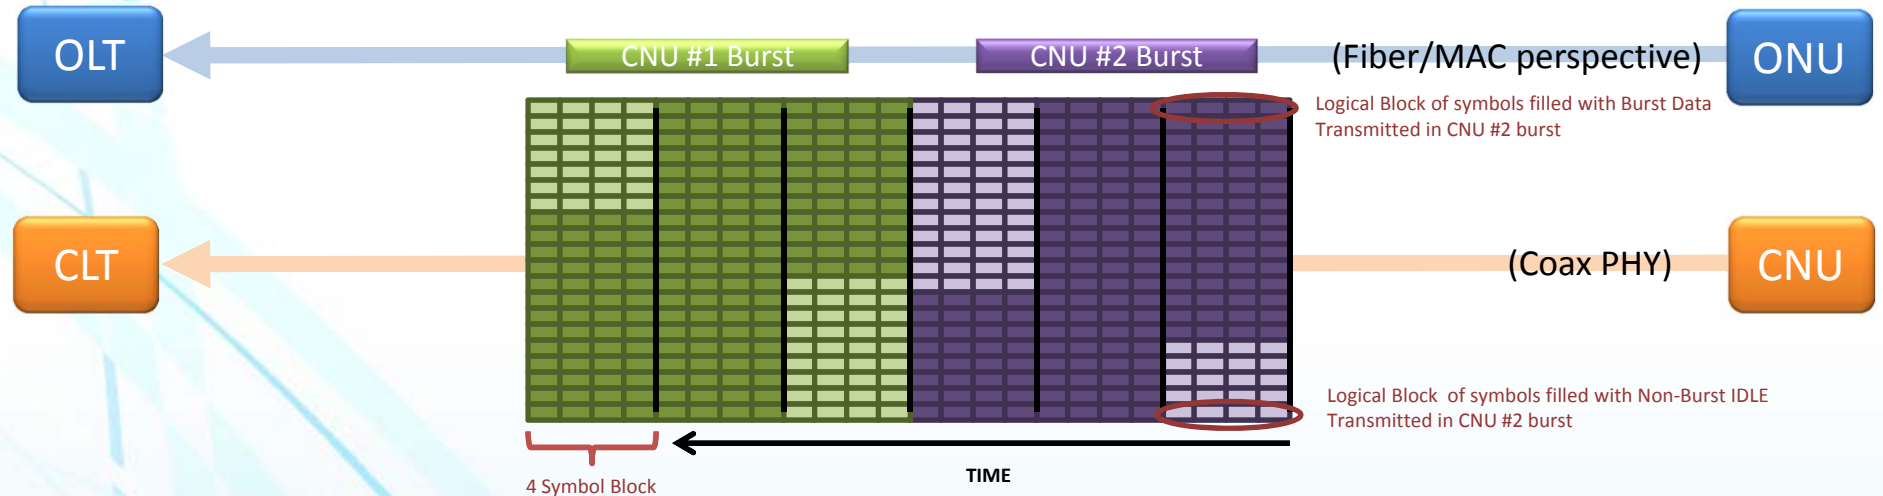

- **Block Interleaving in the upstream adds protection for burst noise**
 - In the example above, 4 symbols are grouped so the time interval spanned by a FEC block is 4 times longer. Burst error protection is 4 times longer.
- **Blocks of symbols are grouped together to form a logical block of data.**
 - PLC upstream ranging aligns the logical block start (symbol start isn't enough)
 - MAC Layer must separate bursts by logical block size.
 - Granularity of burst size is based on resource block size and logical block size.




Aligned TDMA Performance

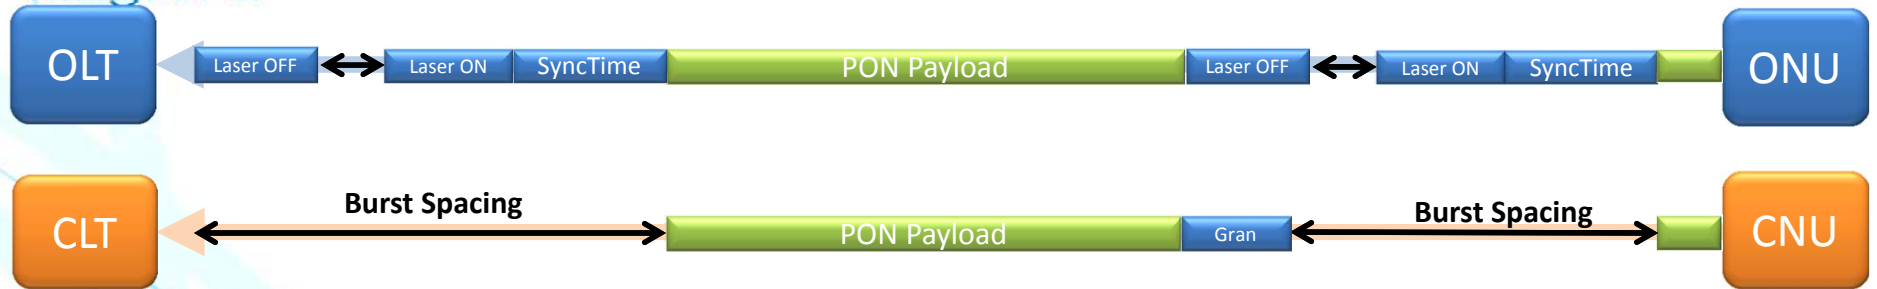

- **Burst Spacing (assume 1Gbps upstream)**
 - EPON: 100 TQ or 200 Bytes
 - No Interleaving (20us symbols): 2,500 Bytes Spacing
 - 4 Symbols (20us symbols): 10,000 Bytes Spacing
 - 8 Symbols (20us symbols): 20,000 Bytes Spacing
 - 12 Symbols (20us symbols): 30,000 Bytes Spacing
 - No Interleaving (40us symbols): 5,000 Bytes Spacing
 - 4 Symbols (40us symbols): 20,000 Bytes Spacing
 - 8 Symbols (40us symbols): 40,000 Bytes Spacing
 - 12 Symbols (40us symbols): 60,000 Bytes Spacing

Burst Spacing Penalty is very high with time interleaving and long symbols.

OFDMA: Minimize Spacing

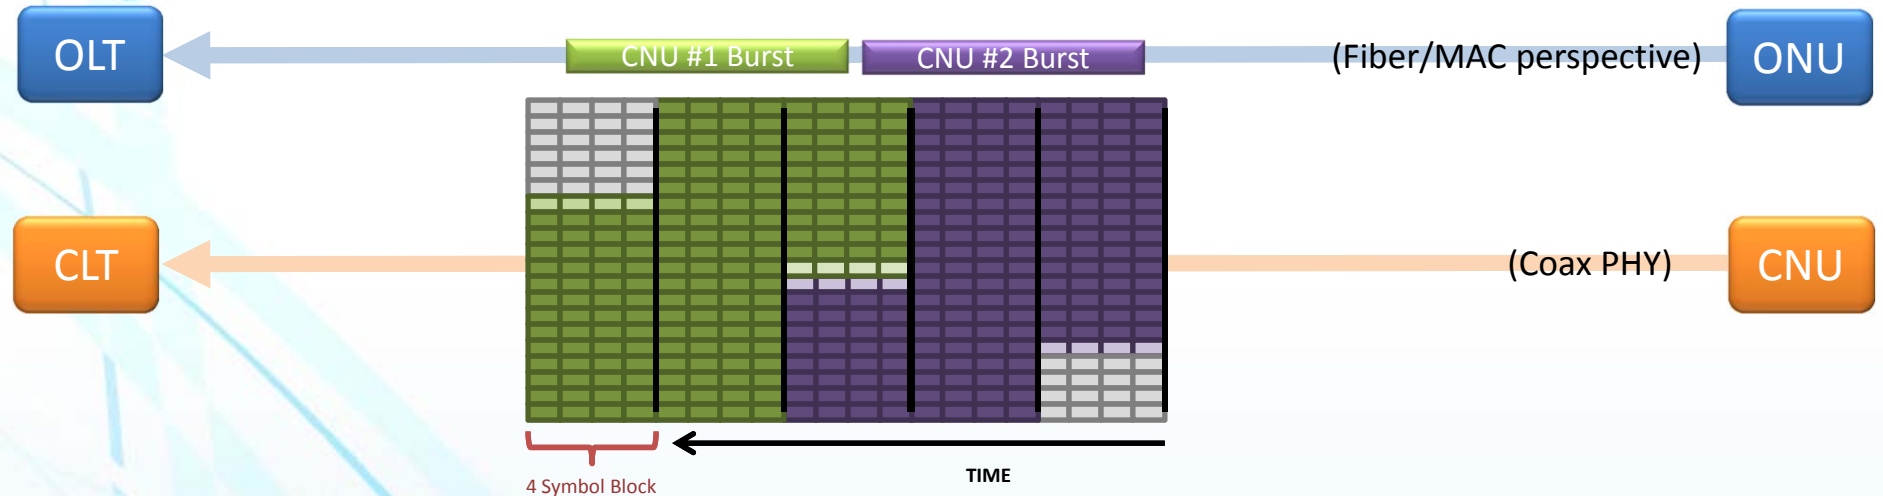

- OFDMA allows multiple transmitters in a symbol block.
- The spacing for the interleaved block is dramatically reduced.
 - Start and End Marker along with Resource Block Size
 - Even with 4 or 8 symbols interleavers, it is 100's of bits between bursts versus 10's of thousands.
- MAC Layer Timing is preserved
 - 1D to 2D translation allows for the MAC layer to see a constant flow of data.



Conclusions

- Unaligned TDMA has too much overhead for a high data rate upstream.
- Aligned TDMA could be used for lower data rate and applications without interleaving.
- OFDMA has significant efficiency improvement for a high data rate upstream or an upstream that requires interleaving.



Straw Poll

- EPoC FDD upstream should support an OFDMA upstream with 1D-to-2D translation.
- YES:
- NO:
- ABSTAIN:




OFDMA & 1D-2D TRANSLATION



Overview

- This presentation looks at the CNU upstream data path from the XGMII interface to the PMA symbol mapper.
- The requirements for the PCS and PMA to support 1D-to-2D will be shown
- The PCS/PMA interface will be defined to add to support 1D-to-2D upstream bursts.


Upstream Burst Anatomy

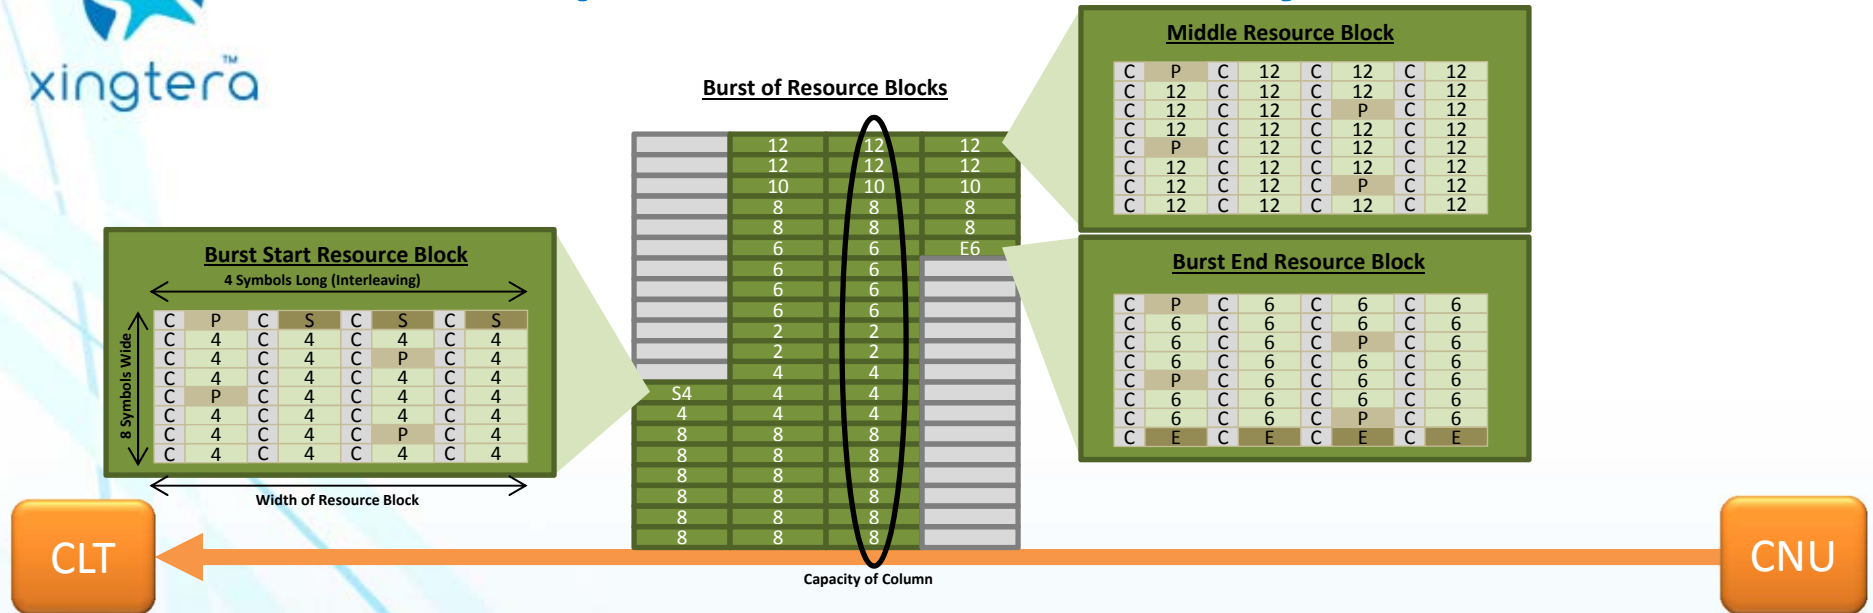

Disclaimer: This slide illustrates one of many possible resource block definitions that would work with 1D-to-2D translation.


- **Bursts are made up of resource blocks**
 - Resource Blocks are as long as the interleaver (Example above is 4 symbols).
 - Resource Blocks are a pre-defined or configured set of consecutive sub-carriers (Example above is 8 sub-carriers).
 - Resource Blocks contain pilots and data carrying symbols. They may contain a start or end marker.
 - All Data Carrying Sub-carriers within a resource block carry the same number of bits.
- **Resource Blocks Usage**
 - Multiple consecutive Resource Blocks make up a burst.
 - There is only a single transmitter in a resource block.
- **Calculating Sustained Data Rate (Capacity-of-Column/Width-of-Resource-Block)**
 - The number of bits in a column of Resource Blocks must be calculated.
 - Determine the number of data carrying symbols in Resource Block (assume no markers)
 - The Overhead bits (excluding markers) must be excluded.

1D-to-2D Basic Concept

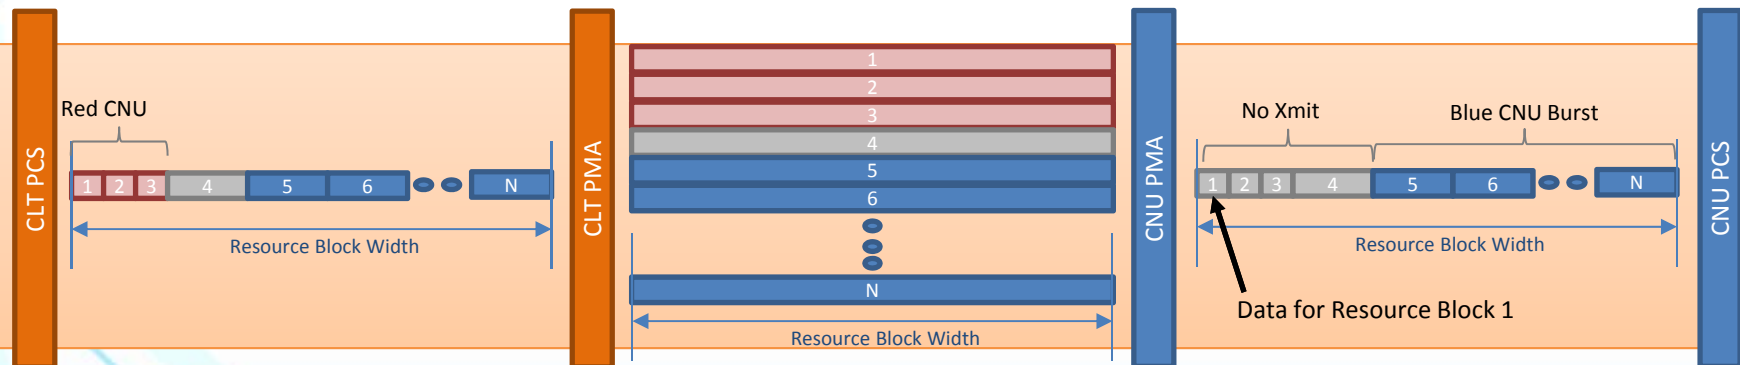

- **CNU PCS to CNU PMA**
 - Data is streamed from PCS to PMA at the sustained data rate.
 - Data stream is split into resource blocks based on capacity of resource blocks.
 - Upstream Bursts start and stop on resource blocks.
 - All upstream data time is transmitted from PCS to PMA (Data maybe marked no transmit when not bursting upstream)
- **PMA Outputs**
 - CNU PMA receives all serial data over a resource block and sends it out parallel. (1 Resource block of constant delay)
 - CLT PMA receives all parallel data and stream out serially at the sustained data rate. (1 Resource block of constant delay)
- **Upstream Alignment**
 - All delays in PHY are constant based on propagation and resource block width (NOTE: it is not based on capacity)
 - PLC aligns the start of the resource block from the PCS to a common time reference point in CLT.
 - EPON MAC will guarantee that bursts into PCS from XGMII are at unique times.
 - If PCS/PMA time is unique and represents specific resource blocks, the CNUs will not share a resource block.


MAC-to-PHY burst extension

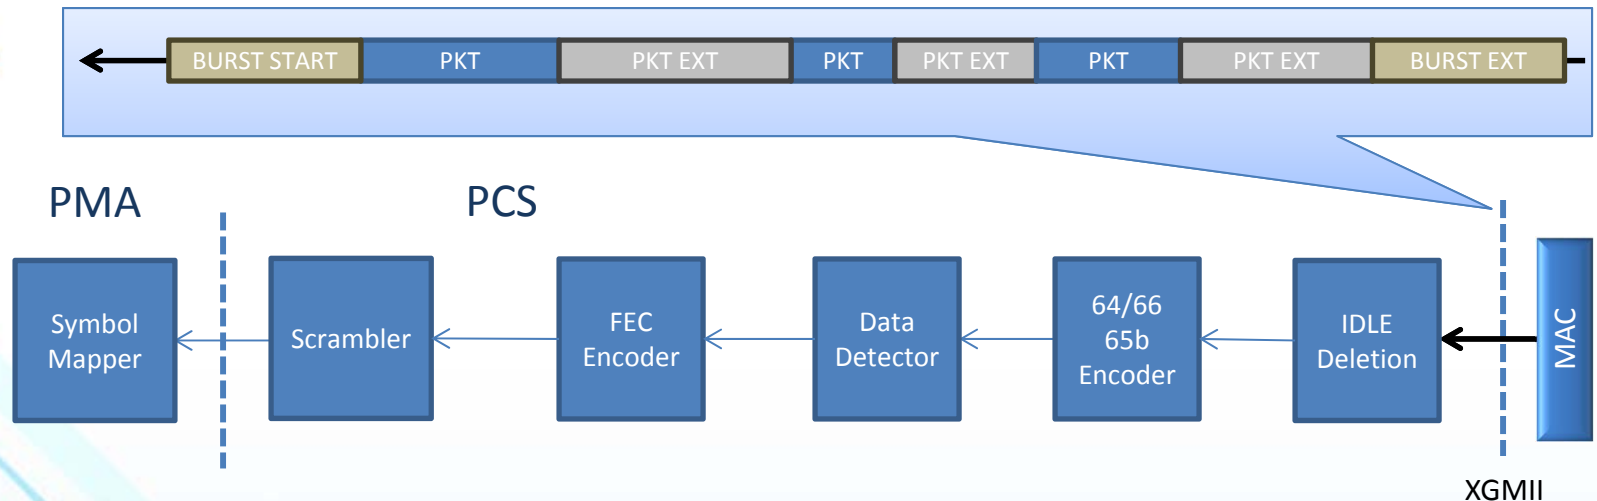

- **Burst Start**
 - The MAC is not aware of the Resource Block boundaries, the burst will most likely not align to the start of resource block.
 - The data at the start of the burst will be dropped if it doesn't align to the start of a resource block.
 - The burst start is a string of IDLE characters that can be discarded without shifting the burst.
 - The burst start must be greater than the maximum resource block capacity. (28x12 bits=336 bits in my example)
 - Burst Start is similar to sync time in EPON except the loss of characters happens in the transmitter and not the receiver.
- **Packet Extension**
 - Packets from XGMII at 10Gbps must be extended to match the data rate of the PHY minus overhead.
 - The sustained data rate minus the FEC and 64/66 encoding determine the amount of packet extension
- **Burst Extension**
 - The burst consumes additional capacity due to FEC block termination and alignment to the Resource Block Boundary.
 - The Burst Extension is a dead time between bursts in addition to the upstream slot jitter.



PCS Data Transformation

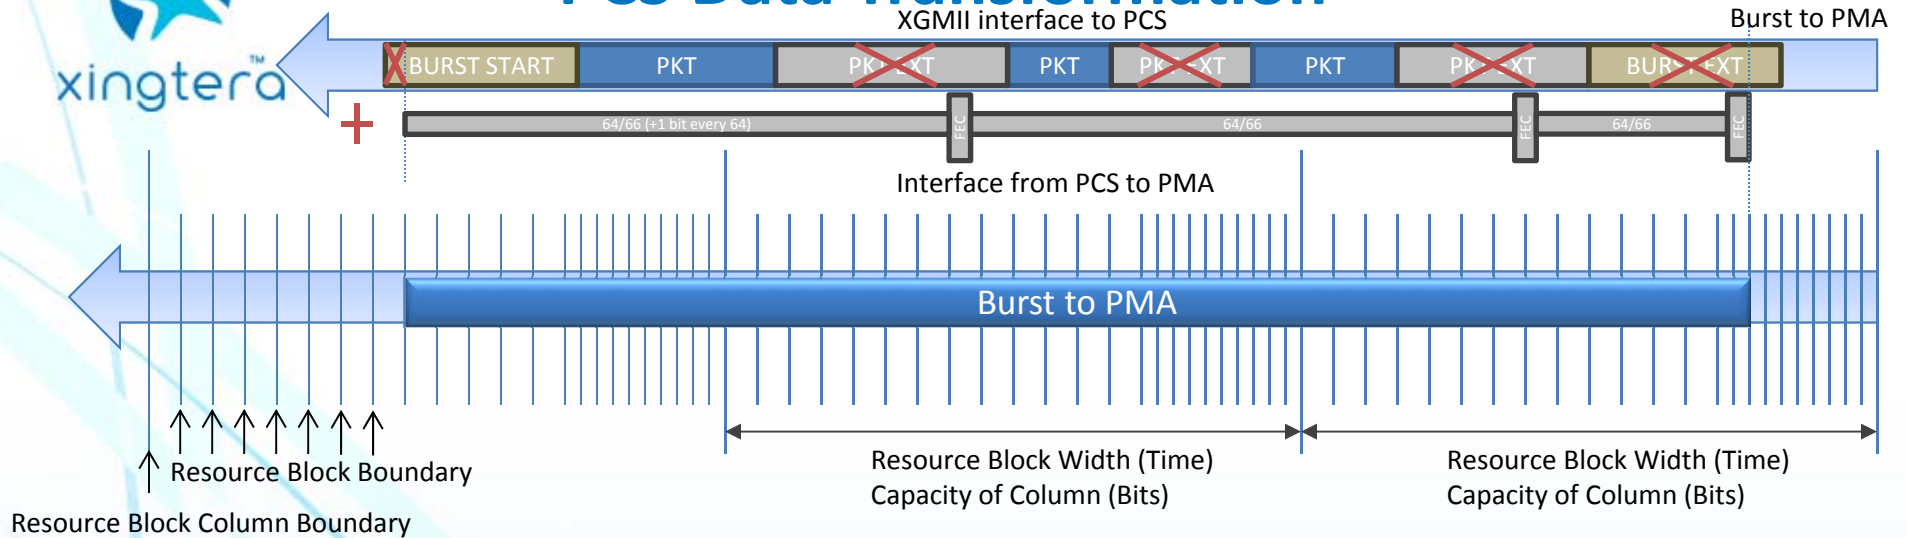

- **PCS to PMA**



- The PCS provides a constant data rate stream of data to the PMA (for a configuration)
- The PCS identifies the bits in a burst and out side of burst (a laser enable equivalent)
- The PCS/PMA are aware of the Resource Boundaries and Resource Block Boundaries in the data stream.
- The data rate is determined by the Resource Block Column Capacity (total bits) over the width of a Resource Block (time).

- **PCS Data Transformation**

- Bits from a burst start are discarded until a Resource Block Boundary is reached.
- Bits for Start Marker are discarded.
- 64/66 encoding and FEC encoding starts on data stream.
- IDLE deletion occurs on the data stream.
- At the end of burst, bits from the burst extension are taken until a Resource block boundary is reached after FEC has been inserted.




PCS/PMA Boundary (CNU Upstream)

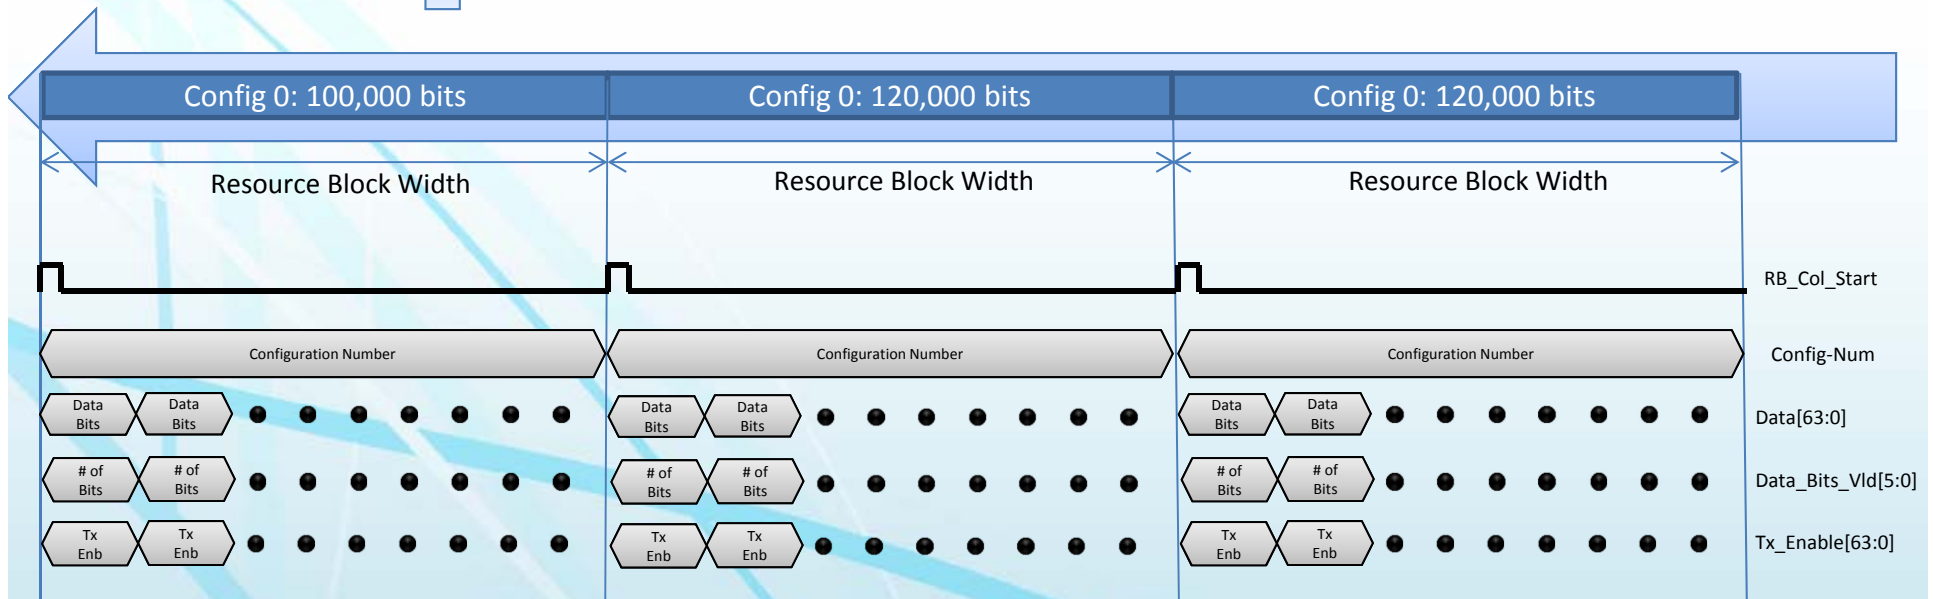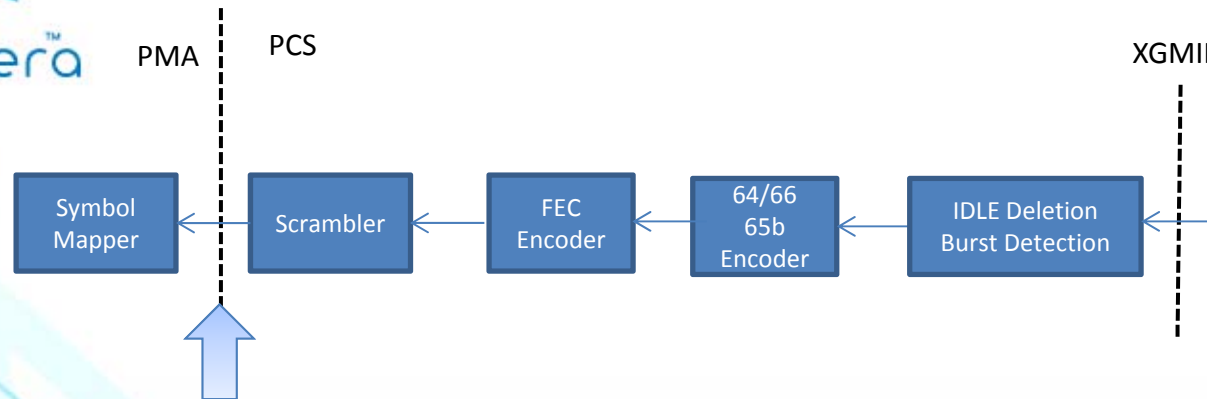

- RB_Col_Start indicates the first bit of the first Resource Block in the column.
- Config_Num allows for switching the bit loading (capacity) between Resource Blocks.
- Data is transferred in blocks of 64 bits with 204.8MHz clock (supports over 10Gbps)
- Data_Bits_Vld allow for ending on non-64 bit boundaries (if required)
- Tx_Enable identifies the bits that are part of a burst.



Upstream PMA: 1D-to-2D Translation

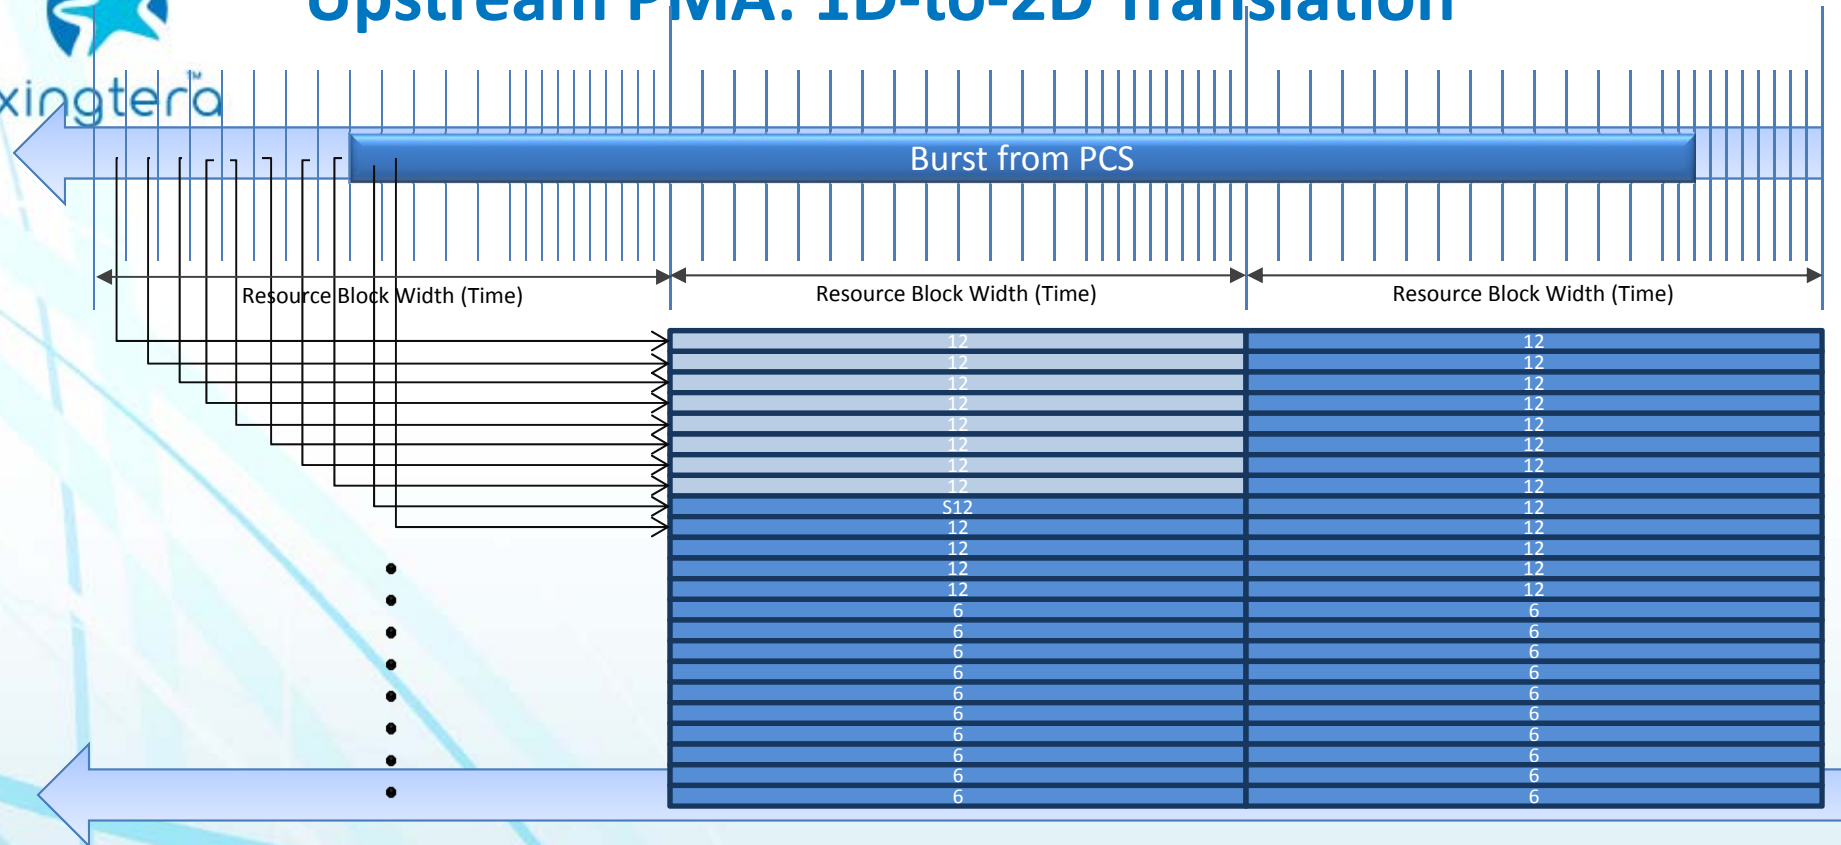


- The bits in a PCS data stream are mapped into the resource blocks.
 - Mapping can be direct and simple as shown or a translation table to create a frequency interleaving function.
- The PCS data indicates if the bits (and related Resource blocks) are the start of burst, middle of burst, end of burst, or non-burst bits.
- The PCS guarantees that bursts start and end on resource block boundaries.



Key Guidelines for 1D-to-2D

- The PLC must align the start of resource blocks from the CNUs PHY to a common reference point at the CLT.
- If PHY delay is constant, MAC ranging will guarantee that bursts don't share resource blocks.
- The PCS must know the capacity in the resource blocks and be aligned to the resource block column start and end time.
- The PCS must have a fixed delay from start of packet input to output.
 - Trimming characters at the start of burst eliminates the need to shift bursts into resource blocks.
- Resource blocks with any bit loading can be supported.
- Pilot location in Resource Block is not important to the PCS.
- 1D-to-2D mapping is a simple function in the PMA.

Upstream PMA: Filling Resource Blocks

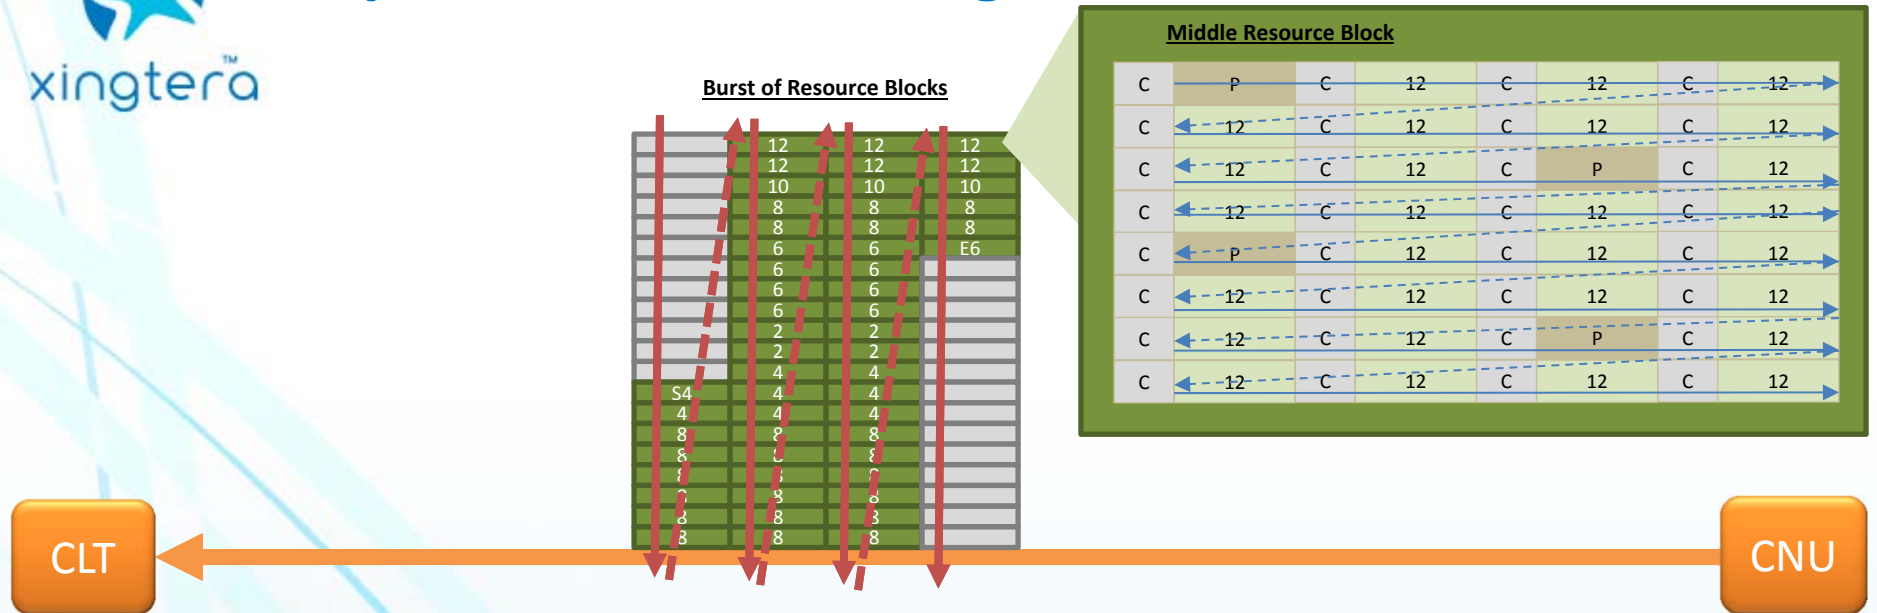

- **Serial Data from PCS is split into Resource Blocks based on Fixed known capacity.**
 - Serial Data Stream may indicate "No Transmit Bits" that the PMA would use to indicate Resource blocks for another CNU
- **Serial Stream to Resource Blocks**
 - Highest-to-Lowest Frequency through an entire Resource Block Column.
- **Resource Blocks to sub-carriers**
 - The highest frequency sub-carrier is loaded across the entire resource block (skipping any pilot)
 - The next highest frequency is loaded and so on until the end of the resource block.
 - The loading across a resource block creates a block time interleaving function.



Conclusions

- OFDMA and 1D-to-2D translation has much lower overhead than pure TDMA or aligned TDMA.
- OFDMA and 1D-to-2D translation can be easily implemented in the PMA Symbol Mapper.
- PCS must be aware of resource block boundaries and resource block capacities.



Straw Poll

- Approve these slides as baseline starting point for FDD Upstream 1D-to-2D translation
- YES:
- NO:
- ABSTAIN: