

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Proposal for BS IP Management	
Date Submitted	2006-09-26	
Source(s)	Ronald Mao Li Chuan Zou Lan Huawei Technologies. No.98,Lane91, Eshan Road, Pudong , Shanghai, China Pudong Lujiazui Software Park	Voice: +001 858 882 0335 Fax: Mailto: zlan@huawei.com rmao@huawei.com
Re:	Contribution on IEEE 802.16g/D4	
Abstract	This contribution proposed a method to distribute IP address to BS by NCMS. Add this feature can greatly save operators' CAPEX and OPEX.	
Purpose	Adoption	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	


Proposal for BS IP address Management

HUAWEI

Introduction

Commonly BS IP addresses are configured manually with careful IP address distribution plan. But with network becoming larger, it is a hard work to plan the IP distribution manually. On the other hand, sometimes BS may be moved to other places, operators must redistribute IP addresses accordingly.

This contribution proposes to provide a method to distribute IP addresses for BS by NCMS. When BS starts, it requests IP address from NCMS. NCMS examines BS identifier–MS ID, and offers a free IP address from its IP address pool.

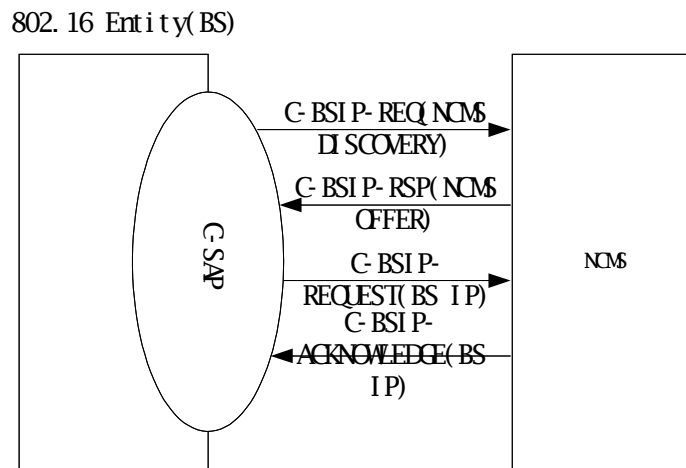

- (1) When BS starts, it sends a discovery message to find NCMS IP address.
- (2) NCMS sends an offer message to BS to provide its IP address and suggestive BS IP address.
- (3) BS requests IP address for itself.
- (4) NCMS provides a usable IP address for BS.

Proposed Text Changes

Add section 14.2.12 BS IP management as follows:

14.2.12 BS IP management

These primitives are provided when BS IP address is managed. It is available for both IPv4 and IPv6.

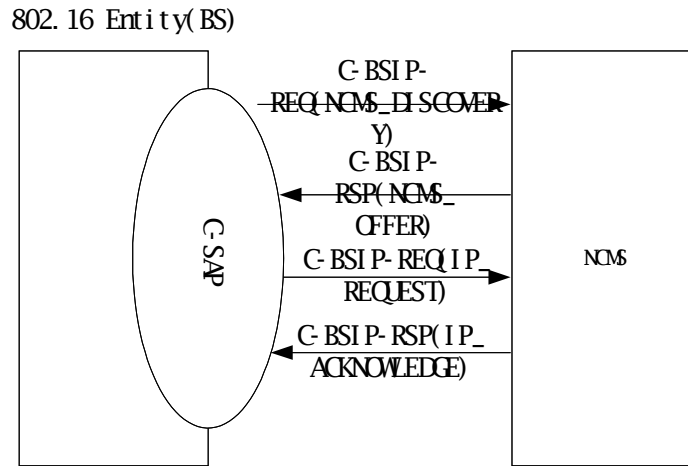


Figure BS IP address distributed by NCMS

14.2.12.1 C-BSIP-REQ

This primitive is used by an 802.16 entity(BS) to ask for NCMS IP address or IP address for itself. The Event Type included in this primitive defines the information included in this primitive. The possible Event Types for this primitive are list in Table blow:

Event Type	Description
NCMS_DISCOVERY	Ask for NCMS IP address
IP_REQUEST	Ask for IP address for BS

14.2.12.1.1 C-BSIP-REQ(Event Type==NCMS_DISCOVERY)

Function:

BS sends the broadcast message to ask for NCMS IP address.

Semantics of the Service Primitives:

The parameters of the primitives are as follows:

```

C-BSIP-REQ
{
    Message_id,
    Event_Type(NCMS_DISCOVERY),
    Object_id(NCMS_ID),
    Attribute_list,
    BS_ID
    Payload
}
    
```

NCMS_ID

48-bit unique identifier

Payload

Contains the DHCP payload

When generated:

This primitive is generated when BS restarts.

Effect of receipt:

The DHCP server in NCMS processes this signaling to provide DHCP server IP address.

14.2.12.1.2 C-BSIP-REQ(Event Type==IP_REQUEST)**Function:**

BS sends the message to ask NCMS for IP address for itself.

Semantics of the Service Primitives:

The parameters of the primitives are as follows:

C-BSIP-REQ

```
{
    Message_id,
    Event_Type(IP_REQUEST),
    Object_id(NCMS_ID),
    Attribute_list:
        BS_ID
        Payload
}
```

BS_ID

48-bit unique identifier

Payload

Contains DHCP payload

When generated:

This primitive is generated when BS receives NCMS IP address.

Effect of receipt:

DHCP server in NCMS processes this signaling to provide BS with IP address.

14.2.12.2 C-BSIP-RSP

This primitive is used by NCMS to answer BS with NCMS IP address or IP address. The Event Type included in this primitive defines the information included in this primitive. The possible Event Types for this primitive are list in Table below:

Event Type	Description
NCMS_OFFER	provide NCMS IP address
IP_ACKNOWLEDGE	Provide IP address for BS

14.2.12.2.1 C-BSIP-RSP(Event Type==NCMS_OFFER)**Function:**

NCMS responses to BS request message to provide NCMS IP address.

Semantics of the Service Primitives:

The parameters of the primitives are as follows:

C-BSIP-RSP

```
{
    Message_id,
    Event_Type(NCMS_OFFER),
    Object_id(BS_ID),
    Attribute_list:
        Payload
}
```

BS_ID

48-bit unique identifier

Payload

Contains DHCP payload

When generated:

This primitive is generated when NCMS receives BS IP request message.

Effect of receipt:

BS processes this signaling to ask for its IP address.

14.2.12.2.2 **C-BSIP-RSP(Event Type==IP_ACKNOWLEDGE)**

Function:

NCMS sends the message to provide BS with IP address.

Semantics of the Service Primitives:

The parameters of the primitives are as follows:

C-BSIP-RSP

```
{
    Message_id,
    Event_Type(IP_ACKNOWLEDGE),
    Object_id(BS_ID),
    Attribute_list:
        Payload
}
```

BS_ID

48-bit unique identifier

Payload

Contains DHCP payload

When generated:

This primitive is generated when NCMS receives BS request for IP address.

Effect of receipt:

The BS knows IP address.

