

Project	IEEE 802.16 Broadband Wireless Access Working Group < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>Text proposal for <del>MAC</del> handover <del>cases</del> procedure in an MR Network</b>	
Date Submitted	2006-11-16	
Source(s)	<p>Hyunjeong Lee <a href="mailto:hyunjeong.hannah.lee@intel.com">hyunjeong.hannah.lee@intel.com</a>  Wendy C. Wong  Jerry Sydir  Kerstin Johnsson  Intel Corporation</p> <p>Hyunjeong Kang <a href="mailto:hyunjeong.kang@samsung.com">hyunjeong.kang@samsung.com</a>  Hyoung Kyu Lim  Rakesh Taori  Samsung Electronics</p> <p>Kenji Saito <a href="mailto:saito@kddilabs.jp">saito@kddilabs.jp</a>  KDDI R&amp;D Lab Inc.</p> <p>Gang Shen <a href="mailto:gang.a.shen@alcatel-sbell.com.cn">gang.a.shen@alcatel-sbell.com.cn</a>  Kaibin Zhang  Alcatel, Research &amp; Innovation</p>	<p>Sujean Yang <a href="mailto:sujean35@ewhain.net">sujean35@ewhain.net</a>  Meejeong Lee <a href="mailto:lmj@ewha.ac.kr">lmj@ewha.ac.kr</a>  Dept. of Computer Science and Engineering  Ewha Womans University</p> <p>Yousuf Saifullah <a href="mailto:yousuf.Saifullah@nokia.com">yousuf.Saifullah@nokia.com</a>  Shashikant Maheshwari  Haihong Zheng  Nokia</p> <p>Sungkyung Kim <a href="mailto:cyrano@etri.re.kr">cyrano@etri.re.kr</a>  Sungcheol Chang  Chulsik Yoon  ETRI</p>
Re:	Text change proposal for IEEE 802.16j amendment	
Abstract	This document defines seven handover cases in IEEE 802.16j MR networks.	
Purpose	This contribution proposes the text to be inserted into IEEE 802.16j amendment.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.	

## 1. Terminologies and Definitions

**access station:** The station at the point of direct access into the network for a given MS or RS. An access station can be a BS, RS, or MR-BS.

**servicing station:** For any MS, the servicing station is the station with which the MS has most recently completed registration at initial entry or during a handover. A servicing station can be a BS or MR-BS.

**target access station:** A station which is the primary candidate for MS network access following a handover. The target access station can be an RS, BS, or MR-BS.

**target servicing station:** A station which is the primary candidate for MS registration following a handover. The target servicing station can be a BS or MR-BS.

**infrastructure station (IS):** A station which is not a subscriber. The infrastructure station can be a BS, MR-BS, or RS.

**neighbor station:** For an MS, an access station whose downlink transmission over the access link can be received by the MS. (This definition follows the definition of the terminology *neighbor BS* in IEEE 802.16e-2005.) For an infrastructure station (IS), any other IS whose transmission over relay link can be received by the IS.


## 2. Proposed text change

*[Insert the following in subclause 6.3.22 before subclause 6.3.22.1]*

Due to the introduction of RSs into the network infrastructure, seven different handover cases illustrated in can occur in an MR network. The seven cases belong to two main categories of handover: (1) Intra MR-BS handover if the handover is between two RSs controlled by the same MR-BS or between an MR-BS and one of its subordinate RSs; and (2) Inter MR-BS handover if the handover is between two MR-BSs, two RSs each controlled by different MR-BSs, or between an MR-BS and an RS controlled by a different MR-BS.

~~All~~The six new cases (i.e., Cases 1, 2, 3, 5, 6, and 7) require signaling among involved RSs and MR-BSs to support handover. ~~Therefore, this subclause also~~ contains procedures for infrastructure stations to support MS handover if the MS is attached to an MR network.

The hHandover procedures for these cases shall accommodate various types of RSs of different capabilities depending on the functional split between MR-BS and its subordinate RSs.

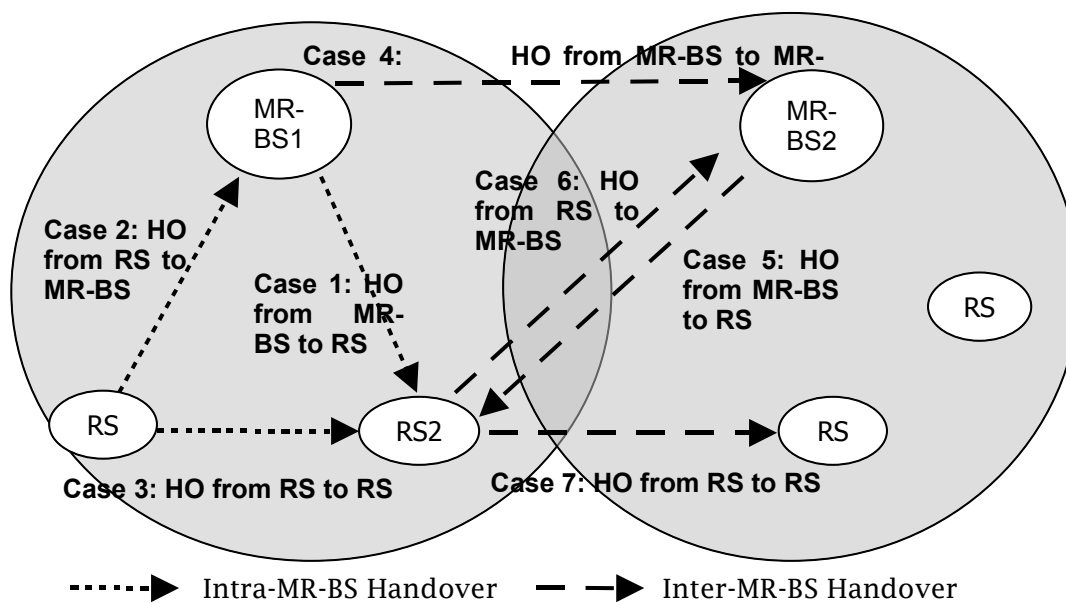

**Figure 1 Seven Handover Cases in an MR network**

*[Insert new subclause 6.3.22.4]*

6.3.22.4 Mobile Relay Station Handover

The Mobile RS (MRS) handover process deals with handover of the MRS along with all the subordinate MSs to a target access station. MRS handover follows the handover stages as described in section 6.3.22.2. The differences with respect to 6.3.22.2 are described in this section.