

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Channel Access for Multihop Relay Chains	
Date Submitted	2007-01-17	
Source(s)	<p>Saravanan Govindan, Pek Yew Tan Panasonic Singapore Laboratories 1022 Tai Seng Avenue, #06-3530 534 415 Singapore</p> <p>Dharma Basgeet, Zhong Fan, Yong Sun, Paul Staruch Toshiba Research Europe 32 Queen Square Briston BS1 4ND UK</p> <p>Ranga Reddy US ARMY CERDEC Ft. Monmouth, NJ 07703 USA</p>	<p>saravanan.govindan@sg.panasonic.com</p> <p>dharma.basgeet@toshiba-trel.com</p> <p>ranga.reddy@us.army.mil</p>
Re:	IEEE 802.16j-06/034: "Call for Technical Proposals regarding IEEE Project P802.16j"	
Abstract	This contribution proposes a channel access approach for multihop relay chains of IEEE 802.16j	
Purpose	Inclusion in IEEE 802.16j specification	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Channel Access for Multihop Relay Chains

I. Introduction

Multihop relay networks introduce new dynamics in how RSs and MSs contend for channel access to the MR-BS. In current IEEE 802.16 networks, MSs contend for channel access to the MR-BS to solely exchange traffic that has originated from the MSs themselves. So MSs directly contend for channel access.

However in multihop relay networks, there are differences in channel access contention among RSs that immediately neighbour the MR-BS and those that do not, i.e. RSs more than 1 hop from the MR-BS.

RSs that are immediate-MR-BS neighbours contend for channel access for traffic originating from their own cells and also for traffic originating from other RS cells that are non-immediate-MR-BS neighbours. In this way, immediate-MR-BS neighbours directly contend for channel access, while non-immediate MR-BS neighbours indirectly contend for channel access. The current IEEE 802.16 specifications [1] do not address indirect contention for channel access.

This contribution describes the dynamics of indirect channel access and proposes mechanisms to provide consistent responses to both types of channel access contention. Section 2 describes these contention characteristics and motivates towards a suitable mechanism to address them. Section 3 illustrates the proposed mechanism and Section 4 proposes text corresponding to it for the baseline document [2].

II. Contention Characteristics

Multihop relay networks can be considered to be a collection of RSs arranged in a chain formation. RSs communicate with other RSs over the chain ultimately with the MR-BS. Multihop Relay Chains (MR-Chains) provide a systematic means of studying contention characteristics. Figure 1 illustrates a multihop relay network with 2 MR-Chains.

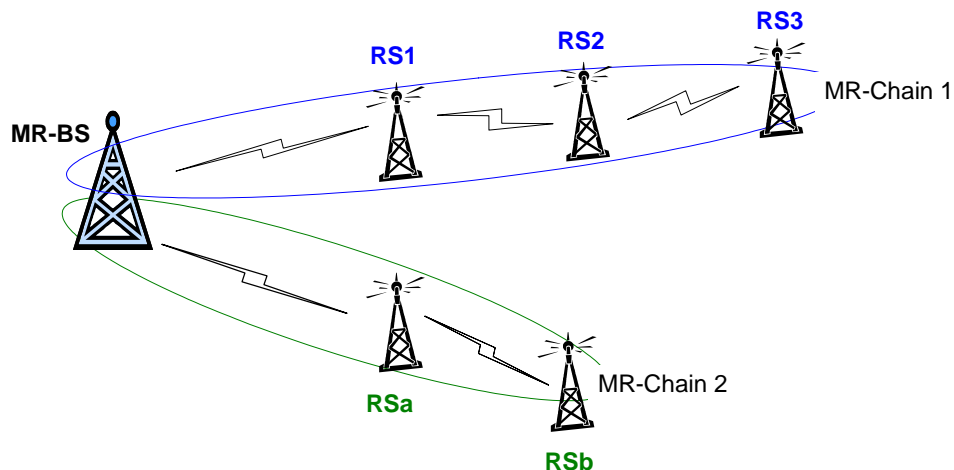


Figure 1: Multihop Relay Chains

1
2 Figure 1 illustrates MR-Chain-1 with 3 RSs and MR-Chain-2 with 2 constituent RSs. MR-Chain-1's RS1
3 and MR-Chain-2's RSa are referred to as Anchor-RSs as they serve to anchor their respective MR-Chains
4 to the MR-BS. Anchor-RSs therefore contend for channel access to the MR-BS directly, while the
5 remaining RSs contend indirectly through their respective Anchor-RSs.
6

7 Following the base IEEE 802.16e-2005 specifications, the MR-BS in Figure 1 would not have information
8 on bandwidth and other resource requirements for MSs in non-Anchor-RS cells. This unfairly prevents
9 MSs at non-Anchor-RS cells from being provisioned adequate resources. In practical terms, service
10 providers would lose subscribers as service agreements on resources would not be met. This raises serious
11 concerns for both subscribers and service providers.
12

13 It is therefore important to consider the dynamics of channel access contention in multihop relay networks.
14 Indirect contention for channel access to the MR-BS must be adequately addressed by the Anchor-RSs for
15 each MR-Chain. Anchor-RSs must be capable of consolidating bandwidth and other resource requests
16 from their MR-Chains and also be capable to correspondingly fulfill those requests on behalf of the
17 MR-BS.
18
19

20 **III. Proposed Solution**

21
22 The proposed mechanism to address the dynamics of channel access contention is based on Anchor-RSs
23 acting as consolidating nodes on behalf of their MR-Chains and the MR-BS.
24

25 The MR-BS maintains a multihop contention profile (MCP) for each of the Anchor-RSs and their
26 respective MR-Chains. MCPs are representative of consolidation contention for channel access to the
27 MR-BS, i.e. they account for both direct and indirect contention.
28

29 Multihop contention profiles consolidate the following metrics;

- 30 • Number of Anchor-RSs simultaneously contending for channel access to the MR-BS
- 31 • Number of RSs constituting each MR-Chain – represents direct & indirect contention
- 32 • Bandwidth requests from each RS
33

34 The MR-BS continually monitors MCPs for each of the MR-BS based on feedback from the Anchor-RS
35 and other RS.
36

37 The MCPs are then used to compute bandwidth allocations.
38

39 Annex A outlines an algorithm for computing bandwidth allocations based on multihop contention
40 profiles.
41
42
43
44
45
46
47
48

IV. Proposed Text

Add the following definitions in Section 3 (Definitions)

MR-Chain: A logical aggregation of RSs. Each MR-Chain originates at the MR-BS

Anchor-RS: The RS of a MR-Chain that is 1 hop away from the MR-BS. Anchor-RSs are immediate neighbours of the MR-BS.

Multihop Contention Profile: A consolidation of contention characteristics of a MR-Chain. MCP accounts for both direct contention (by Anchor-RSs) and indirect contention (by other RSs of a MR-Chain).

Add the following messages in Section 6.3.2.3 (MAC Management Messages)

6.3.2.3.5 RS Resource Management

Relay networks are characterized by distinct contention profiles. In particular, channel access to the MR-BS is made up of direct contention and indirect contention.

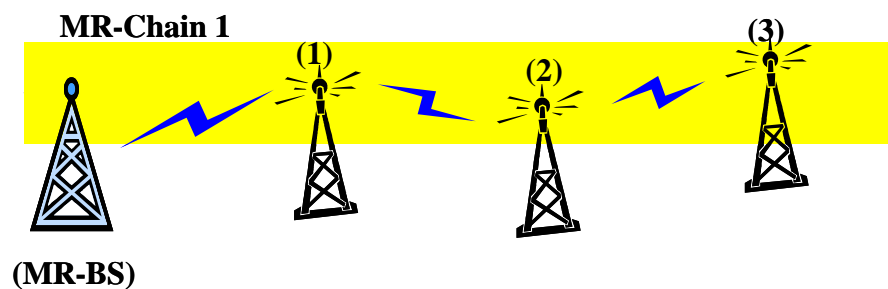


Figure 2: Relay Network Contention Profile

Direct contention refers to RSs directly communicating with the MR-BS. From Figure 2, RS(1) engages in direct contention for channel access to MR-BS.

Indirect contention refers to that by RSs that are 1 or more relay hops away from the MR-BS. From Figure 2, RS(2) and RS(3) engage in indirect contention for channel access to MR-BS through RS(1).

Bandwidth requests and grants in relay networks must account for both types of contention.

6.3.2.3.5.1 RS Bandwidth Request (RS_BW_Req)

The RS_BW_Req message is used by the RS directly communicating with the MR-BS to make aggregated bandwidth requests for both itself and other downstream RSs. This message contains the number of downstream RSs, average traffic volume from the downstream RSs and other statistical parameters.

The MR-BS uses RS_BW_Req to build and maintain the multihop contention profile for each MR-Chain.

Table 1 – RS Bandwidth Request (RS_BW_Req) TLV Description

Name	Type (1 byte)	Length	Value
Number of Downstream RSs	<i>TBD</i>	1	The Anchor-RS tracks the number of RSs downstream from itself. This metric is representative of indirect contention for channel access to the MR-BS.
Transmission volume	<i>TBD</i>	2	Transmission volume characterizes data frame traffic to and from the MR-BS. The Anchor-RS may represent Transmission volume in terms of transmission time or number of data frames
Number of Registered MSs	<i>TBD</i>	1	The number of MSs registered at each RS denotes likely transmission patterns.

6.3.2.3.5.2 RS Bandwidth Grant (RS_BW_Grant)

The RS_BW_Grant message is used by the MR-BS to grant resources in response to the aggregated RS_BW_Req. This message contains the total bandwidth granted and a proportionality factor corresponding to the aggregated bandwidth request. Alternatively, resources granted through RS_BW_Grant may be allocated in a distributed fashion through polling among RSs.

Table 2 – RS Bandwidth Grant (RS_BW_Grant) TLV Description

Name	Type (1 byte)	Length	Value
Proportion of Bandwidth Allocation	<i>TBD</i>	1	The MR-BS specifies how combined bandwidth grant is allocated to individual RSs of MR-Chain.
Combined Bandwidth Allocation	<i>TBD</i>	1	The total bandwidth allocated by the MR-BS to the MR-Chain.

Figure 3 below illustrates the exchange of RS_BW_Req and RS_BW_Grant messages.

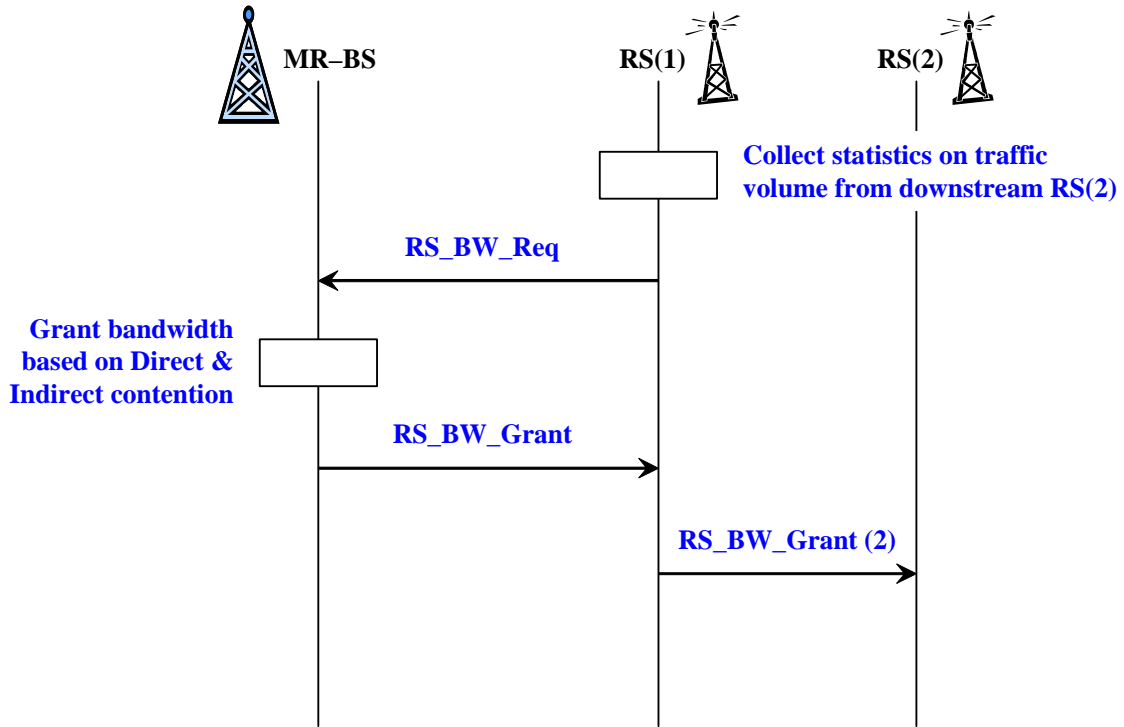


Figure 3: Direct & Indirect Contention

V. References

- [1] IEEE 802.16e-2005
- [2] IEEE 802.16-06/017r2, Baseline document

Annex A

This section describes bandwidth allocation by means of computing channel access parameters, particularly Bandwidth Request, based on MCPs. While the specifics means of calculating parameters are left to implementation, the following provides an algorithmic outline;

$$\begin{aligned} \text{ChP}_{\text{MR-x}} &= f (\text{MCP}_{\text{MR-x}}) \\ &= f (\# \text{AR} , \# \text{N}_{\text{MR-x}}) \\ &= (\text{P1} \times \# \text{N}_{\text{MR-x}}) / (\text{P2} \times \# \text{AR}) \end{aligned}$$

where;

- Subscript qualifies the base parameter
- **MR-x** denotes the MR-Chain being represented
- **ChP** is the generic channel access parameter being calculated
- **MCP** is the multihop contention profile maintained by the MR-BS
- **#AR** is the number of Anchor-RSs simultaneously contending for channel access to the MR-BS
- **#N** is the number of RSs constituting a MR-Chain
- **P1, P2** are representative of weights assigned to relative parameters

The proposed algorithm ensures that contention is managed by accounting for direct channel access (by Anchor-RSs) and for indirect channel access (by the number of RSs constituting each MR-Chain).