

IEEE 802.16 Broadband Wireless Access Working Group <<http://ieee802.org/16>>

Title **Comments on location information request and response messages**

Date Submitted **2007-04-25**

Source(s) Kanchei (Ken) Loa, Yi-Hsueh Tsai, Yung-Ting Lee, Shiann-Tsong Sheu, Hua-Chiang Yin, Frank C.D. Tsai, Youn-Tai Lee, Heng-Iang Hsu, Chih-Chiang Hsieh
 Institute for Information Industry
 8F., No. 218, Sec. 2, Dunhua S. Rd.,
 Taipei City, Taiwan.

Voice: +886-2-2739-9616
 mail to: loa@iii.org.tw

[add other co-author here]

Re: IEEE 802.16j-07/013: "Call for Technical Comments Regarding IEEE Project 802.16j"

Abstract This contribution proposes the comments on location information request and response messages

Purpose Discussion and Adoption in IEEE 802.16j

Notice This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

Patent Policy and Procedures The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <<http://ieee802.org/16/ipr/patents/policy.html>>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <<mailto:chair@wirelessman.org>> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://ieee802.org/16/ipr/patents/notices>>.

Comments on location information request and response messages

Kanchei (Ken) Loa, Yi-Hsueh Tsai, Yung-Ting Lee, Shiann-Tsong Sheu, Hua-Chiang Yin, Frank C.D. Tsai,
Youn-Tai Lee, Heng-Iang Hsu, Chih-Chiang Hsieh
Institute for Information Industry

Introduction

The purpose of this document is to comment subclause 6.3.2.3.65 location information request and response messages. In order to facilitate the incorporation of this proposal into IEEE 802.16j standard, specific changes to the baseline working document IEEE 802.16j-06/026r3 are listed below.

Proposed Text Change

6.3.2.3.71 Location information request~~ing~~ and response messages

6.3.2.3.71.1 MR_LOC-REQ message

[change the following Table in page 33 as indicated:]

Syntax	Size	Notes
MR_LOC-REQ_Message_Format() {	-	-
Type = xx	8 bits	-
Report Mode	2 bits	0b00: Once 0b01: Periodic report 0b10~11: reserved
Neighbor Location Req Flag	1 bit	0b0: Location request of the receiving RS only 0b1: Request message contains location request for neighboring access stations
<u>Reserved for future use</u>	<u>5 bits</u>	<u>Shall be zero</u>
If(Report Mode = 0b01) {	-	Available when the value of Report Mode is set to 0b01.
Report period	162 bits	Report period in units of frame, a value between 0 to 65535 4095 corresponding to a range of 1 frame to 65536 4096 frame.
}	-	-
If (Neighbor Location Req Flag != 0) {	-	If this message is transmitted by an RS to MR-BS
N_RS	8 bits	Number of neighboring stations for which the RS wants to know the location information.
For (j=0;j<N_RS; j++) {	-	-
RSID	48 bits	The 48 bit MAC address of the neighboring station (BS or RS) whose location is requested.-
}	-	-
}	-	-
padding	variable	Padding bits to ensure byte aligned.
<u>TLV Encoded Message</u>	<u>variable</u>	<u>TLV Encoded Message</u>
}	-	-

Table X1.MR_LOC-REQ message format

[Insert the following paragraph and figures at the end of subclause 6.3.2.3.65.1:]

The following TLV parameters can be included:

The following parameters may be included in MR_LOC-REQ message

Short-HMAC/CMAC Tuple (see 11.1.2)

The Short-HMAC/CMAC Tuple shall be the last attribute in the message.

The flow charts (Figure uuu, and Figure vvv) on the following pages defines MR_LOC-REQ process that shall be followed by compliant RSs and MR-BSs.

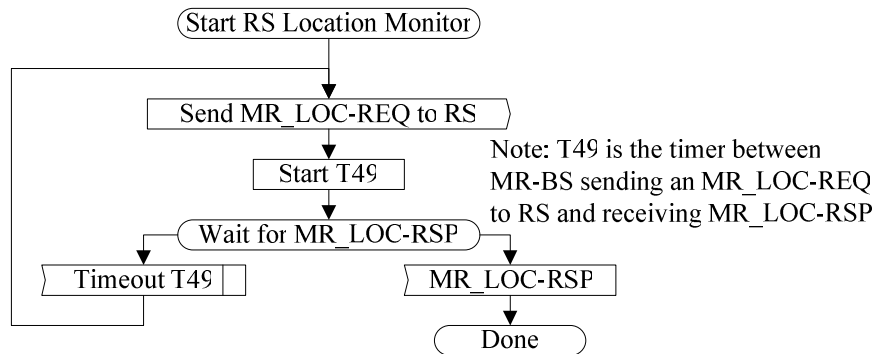


Figure uuu Relay location information request procedure – MR-BS

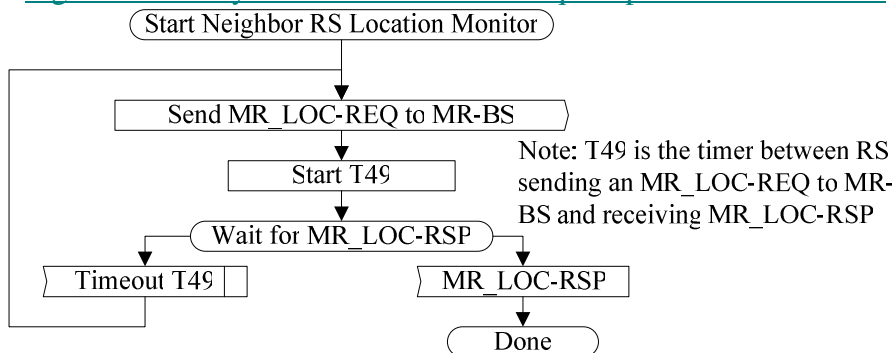


Figure vvv Relay location information request procedure – RS

6.3.2.3.71.2 MR_LOC-RSP message

[change the following Table in page 35 as indicated:]

Syntax	Size	Notes
MR_LOC-RSP_Message_Format(){	-	-
Type = xx	8 bits	-
Report Mode	2 bits	0b00: Once 0b01: Periodic report 0b10~11: reserved
Neighbor Location Req Flag	1 bit	0b0: Location request of the receiving RS only 0b1: Request message contains location request for neighboring access stations
<u>Reserved for future use</u>	<u>5 bits</u>	<u>Shall be zero</u>
If (Neighbor Location Req Flag == 0) {	-	If this message is transmitted by an RS to MR-BS
LLA_IE()	64 bits	Specifies the location of relay station in LLA format defined in section 6.3.2.3.62.3.
} else {	-	If this message is transmitted by an MR-BS to RS
N_RS	8 bits	Number of stations whose location information is included in the current MR_LOC-RSP message.
For (j=0;j<N_RS;j++) {	-	-

RSID	48 bits	The 48 bit MAC address of the neighboring station (BS or RS)
LLA_IE()	64 bits	Specifies the location of neighbor access station in LLA deviation format defined in section 6.3.2.3.62.3.
}	-	-
}	-	-
Padding	variable	Padding bits to ensure byte aligned.
<u>TLV Encoded Message</u>	<u>variable</u>	<u>TLV Encoded Message</u>
}	-	-

Table X2:MR_LOC-RSP message format.

[Insert the following paragraph and figures at the end of subclause 6.3.2.3.65.2:]

The following TLV parameters can be included:

The following parameter shall be included in the MR_LOC-RSP when the BS wishes to acknowledge a valid Short-HMAC/CMAC Tuple in the acknowledged MR_LOC-REQ management message:

Short-HMAC/CMAC Tuple (see 11.1.2)

The Short-HMAC/CMAC Tuple shall be the last attribute in the message.

The flow charts (Figure xxx, and Figure yyy) on the following pages defines MR_LOC-RSP process that shall be followed by compliant RSs and MR-BSs.

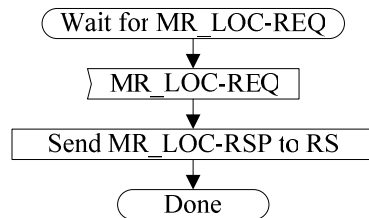


Figure xxx Relay location information response procedure – MR-BS

Note: T_p is the timer equal to the period for RS sending two consecutive MR_LOC-RSP

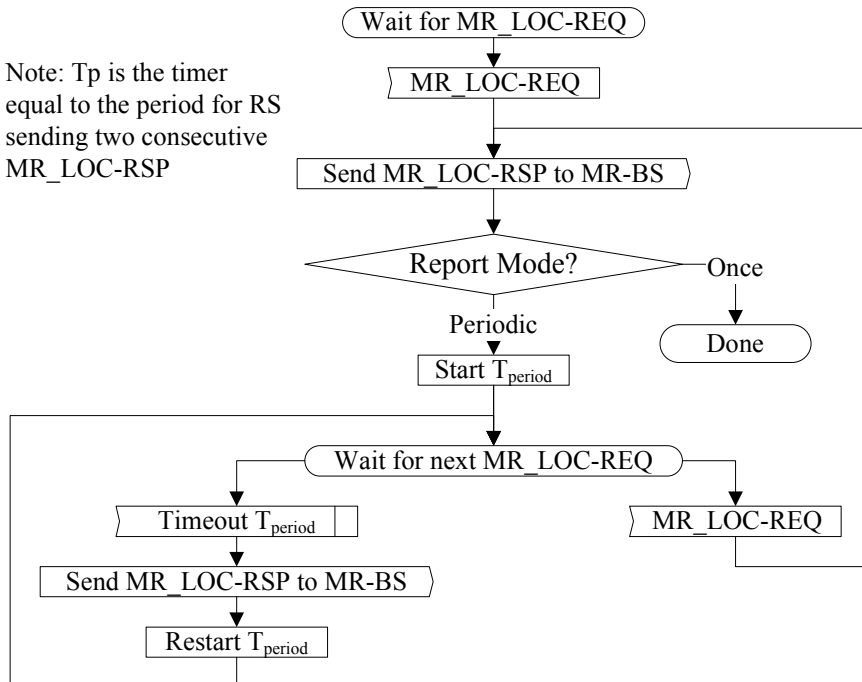


Figure yyy Relay location information response procedure – RS

[change the subclause in page 36as indicated:]

6.3.2.3.71.3 ~~LLA IE()~~ Location information request and response IE format and sequence charts

10.1 Global values

[Insert the following rows into Table 342 in page 111:]

Table 342—Parameters and constants

System	Name	Time reference	Minimum value	Default value	Maximum value
<u>MR-BS or RS</u>	<u>T49</u>	<u>The timer between MR-BS (or RS) sending an MR_LOC-REQ to RS (or MR-BS) and receiving MR_LOC-RSP</u>	<u>tbd</u>	<u>tbd</u>	<u>tbd</u>
<u>RS</u>	<u>T_{period}</u>	<u>The timer equal to the period for RS sending two consecutive MR_LOC-RSP</u>	<u>1 frame duration</u>	<u>N/A</u>	<u>65536 frame duration</u>

11.1.2 Authentication Tuples

11.1.2.2 CMAC Tuple

[Change Table 348a as indicated:]

Table 348a—CMAC Tuple definition

Type	Length	Value	Scope
150	13 or 19	See Table 348b	DSx-REQ, DSx-RSP, DSx-ACK, REG-REQ, REG-RSP, RES-CMD, DREG-CMD, TFTP-CPLT, PKM-REQ, PKM-RSP, MOB_SLP-REQ, MOB_SLP-RSP, MOB_SCN-REQ, MOB_SCN-RSP, MOB_BSHO-REQ, MOB_MSHO-REQ, MOB_BSHO-RSP, MOB_HO-IND, DREG-REQ, <u>MR_LOC-REQ, MR_LOC-RSP</u>

11.1.2.3 Short-HMAC Tuple

[Change Table 348c as indicated:]

Table 348c—Short-HMAC Tuple definition

Type	Length	Value	Scope
151	variable	See Table 348d	MOB_SLP-REQ, MOB_SLP-RSP, MOB_SCN-REQ, MOB_SCN-RSP, MOB_MSHO-REQ, MOB_BSHO-RSP, MOB_HO-IND, RNG-REQ, RNG-RSP, PKM-REQ, PKM-RSP, <u>MR_LOC-REQ, MR_LOC-RSP</u>