

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	MS CDMA-based BR with Transparent RS	
Date	2007-01-18	
Submitted		
Source(s)	<p>Kanchei (Ken) Loa, Yi-Hsueh Tsai, Chih-Chiang Hsieh, Yung-Ting Lee, Hua-Chiang Yin, Shiann-Tsong Sheu, Frank C.D. Tsai, Youn-Tai Lee, Heng-Iang Hsu Institute for Information Industry 8F., No. 218, Sec. 2, Dunhua S. Rd., Taipei City, Taiwan.</p> <p>Hang Zhang, Peiying Zhu, Mo-Han Fong, Wen Tong, David Steer, Gamini Senarath, Derek Yu, Mark Naden, G.Q. Wang</p> <p>Nortel 3500 Carling Avenue Ottawa, Ontario K2H 8E9</p> <p>[add co-authors here]</p>	<p>Voice: +886-2-2739-9616 loa@iii.org.tw</p> <p>Voice: +1 613 7631315 WenTong@nortel.com pyzhu@nortel.com</p>
Re:	IEEE 802.16j-06/034: "Call for Technical Proposals regarding IEEE Project P802.16j"	
Abstract	This contribution proposes procedures for MS CDMA-based BR with transparent RS	
Purpose	Text proposal for 802.16j Baseline Document	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance	

with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:chair@wirelessman.org> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://ieee802.org/16/ipr/patents/notices>>.

MS CDMA-based BR with Transparent RS

Introduction

This contribution describes MS CDMA-based bandwidth request (BR) with transparent RS under centralized scheduling scheme. In order to facilitate the incorporation of this proposal into IEEE 802.16j standard, specific changes to the baseline working document IEEE 802.16j-06/026r1 are listed below.

Text Proposal

6.3.6 Bandwidth allocation and request mechanisms

6.3.6.8 Relaying support for Contention-based CDMA Bandwidth Requests

6.3.6.8.1 Contention-based CDMA Bandwidth Requests with transparent RS

The RS should support the CDMA-based mechanism as specified in the following paragraphs of this subclause.

After RS received a bandwidth request CDMA ranging code resulting in success status, it shall transmit RNG-REQ message with the RS basic CID containing the CDMA ranging code to the serving MR-BS through the relay path. When RS receives multiple CDMA ranging codes in the ranging subchannel of a frame, the RNG-REQ message sent by the RS to serving MR-BS may contain information of multiple received codes.

When the MR-BS bandwidth request CDMA ranging code, it shall wait for RNG-REQ message containing the same ranging code attribute from its subordinate RSs for T48 timer. If the CDMA ranging code or the RNG-REQ message resulting in success status, the BS shall provide (an implementation dependent) uplink allocation for the corresponding MS by transmitting a CDMA allocation IE, which specifies the transmit region and Ranging Code that were used by the MS.

The message sequence charts (Table xxx) and flow charts (Figure xxx and Figure yyy) define the unsolicited RNG-RSP process that shall be followed by compliant RSs and MR-BSs.

Insert the following rows into Table 364 at 11.5 RNG-REQ TLV:


Table 364—RNG-REQ message encodings

	<u>Type</u> (1 byte)	<u>Length</u>	<u>Value</u> (Variable-length)	<u>PHY</u> <u>Scope</u>
<u>Received Ranging Codes</u>	<u>TBA</u>	<u>Variable</u>	<u>Received Ranging Code Attributes is a compound TLV value that indicates received code information.</u>	<u>OFDMA</u>
<u>Timing Adjust</u>	<u>TBA.1</u>	<u>4</u>	<u>Tx timing offset adjustment (signed 32-bit). The amount of time required to adjust MS transmission so the</u>	<u>OFDMA</u>

			<u>bursts will arrive at the expected time instance at the RS. Units are PHY specific (see 10.3). The MS shall advance its burst transmission time if the value is negative and delay its burst transmission if the value is positive.</u>	
<u>Power Level Adjust</u>	<u>TBA.2</u>	<u>1</u>	<u>Tx Power offset adjustment (signed 8-bit, 0.25 dB units) Specifies the relative change in transmission power level that the MS is to make in order that transmissions arrive at the RS at the desired power. When subchannelization is employed, the subscriber shall interpret the power offset adjustment as a required change to the transmitted power density.</u>	<u>OFDMA</u>
<u>Offset Frequency Adjust</u>	<u>TBA.3</u>	<u>4</u>	<u>Tx frequency offset adjustment (signed 32-bit, Hz units)</u> <u>Specifies the relative change in transmission frequency that the MS is to make in order to better match the RS. (This is fine-frequency adjustment within a channel, not reassignment to a different channel.). The MS shall increase its transmit frequency if the value is positive and decrease its transmit frequency if the value is negative.</u>	<u>OFDMA</u>
<u>Ranging Status</u>	<u>TBA.4</u>	<u>1</u>	<u>Used to indicate whether uplink messages are received within acceptable limits by RS.</u> <u>1 = continue, 2 = abort, 3 = success</u>	<u>OFDMA</u>
<u>Received Ranging Code Attributes</u>	<u>TBA.5</u>	<u>Variable</u>	<u>Bits 31:22 – Used to indicate the OFDM time symbol reference that was used to transmit the ranging code.</u> <u>Bits 21:16 – Used to indicate the OFDMA subchannel reference that was used to transmit the ranging code.</u>	<u>OFDMA</u>

			<p><u>Bits 15:8 – Used to indicate the ranging code index that was sent by the MS.</u></p> <p><u>Bits 7:0 – The 8 least significant bits of the frame number of the OFDMA frame where the MS sent the ranging code.</u></p>	
<u>MS CINR mean</u>	<u>TBA.6</u>	<u>1</u>	<p><u>The MS CINR mean parameter indicates the CINR measured by the RS from the MS. The value shall be interpreted as a signed byte with units of (TBD) dB. The measurement shall be performed on the CDMA ranging signal sent by the MS and averaged over the measurement period.</u></p>	<u>OFDMA</u>
<u>MS RSSI mean</u>	<u>TBA.7</u>	<u>1</u>	<p><u>The MS RSSI mean parameter indicates the Received Signal Strength measured by the RS from the MS. The value shall be interpreted as an unsigned byte with units of (TBD) dB, such that 0x00 is interpreted as (TBD) dBm, an RS shall be able to report values in the range (TBD) dBm to (TBD) dBm. The measurement shall be performed on the CDMA ranging signal sent by the MS and averaged over the measurement period</u></p>	<u>OFDMA</u>

Table xxx: MS CDMA-based Bandwidth Request procedure in transparent RS systems

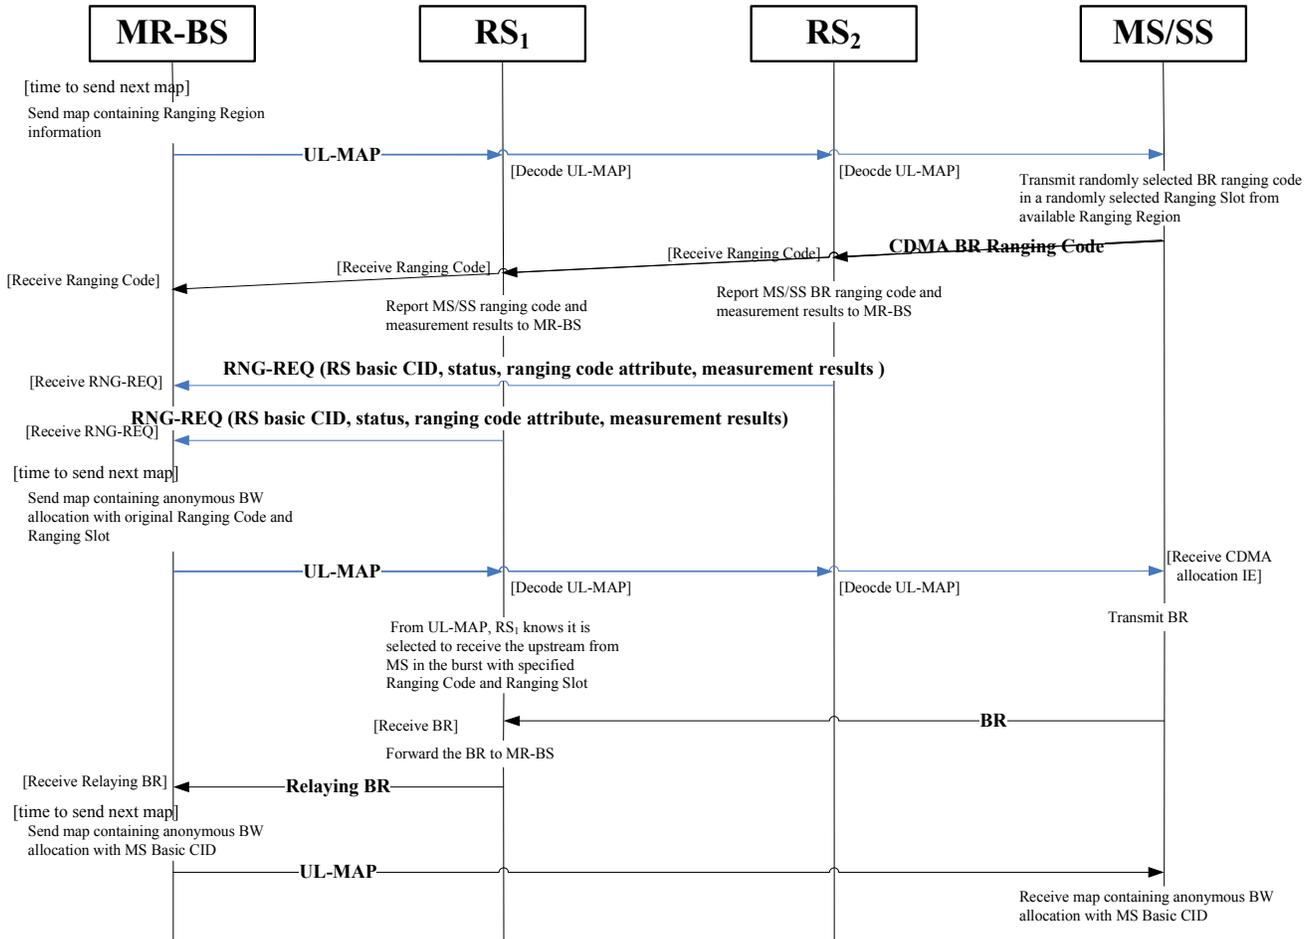

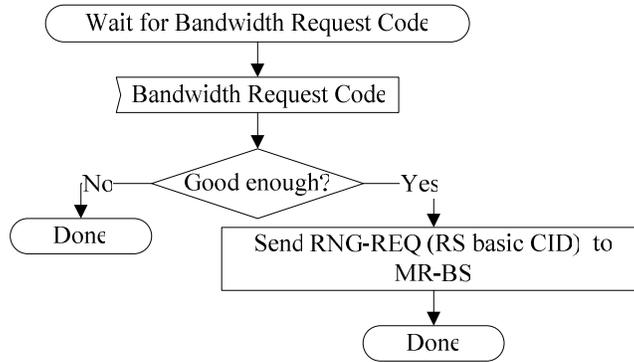


Figure xxx MS CDMA-based Bandwidth Request – Transparent Access RS (part 1)

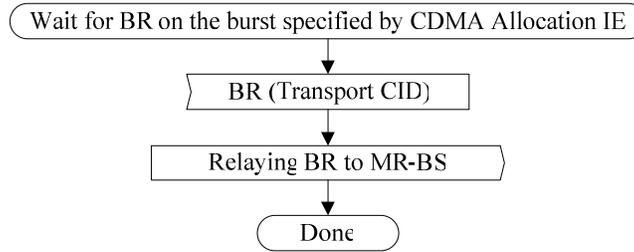


Figure xxx MS CDMA-based Bandwidth Request – Non-transparent Access RS (part 2)

Note: T48 is the timer between the MR-BS sending an RNG-RSP to an MS and receiving a ranging code or RNG-REQ

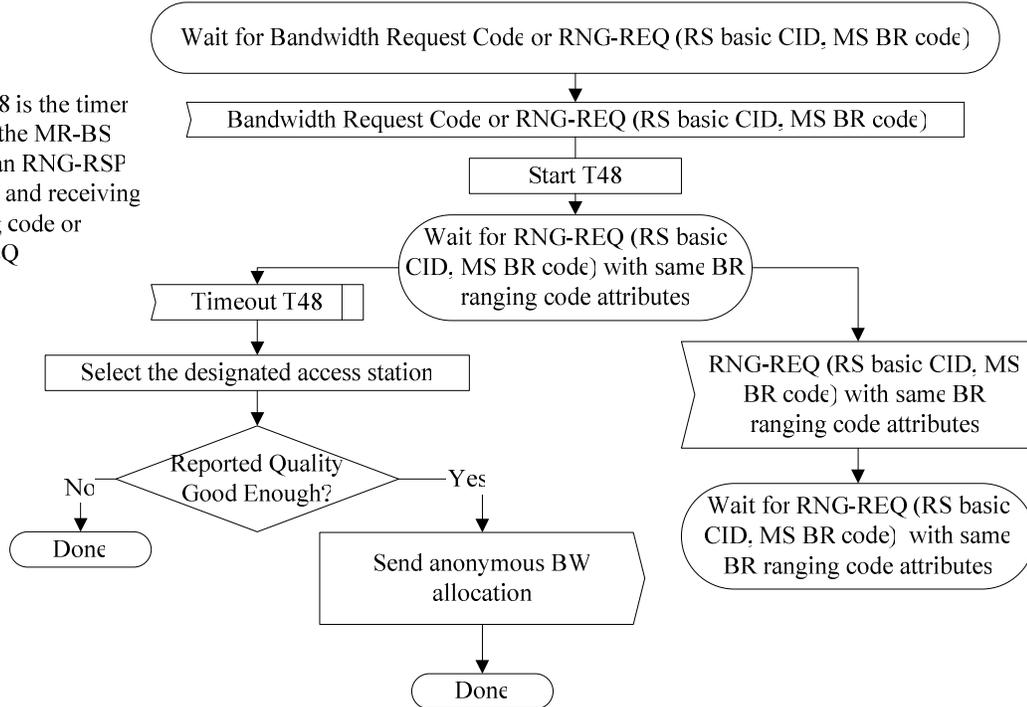


Figure yyy MS CDMA-based Bandwidth Request with Transparent RS – MR-BS