

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >
Title	OVERVIEW OF PHYSICAL LAYER PROPOSAL FOR IEEE 802.16.3
Date	2000-10-30
Source	A.R. Hammons Hughes Network Systems 11717 Exploration Lane Germantown, MD 20878 USA rhammons@hns.com
Re:	In response to Call for Initial Proposals for 802.16.3 BWA PHY Layer (2000-9-15)
Abstract	A brief summary of a physical layer proposal based on space-time coded OFDM with QPSK subcarrier modulation.
Purpose	Discussion and development of 802.16.3 BWA PHY.
Notice	This document has been prepared to assist MEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate text contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent and Policy Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:r.b.marks@ieee.org > as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.

OVERVIEW OF PHYSICAL LAYER PROPOSAL FOR IEEE 802.16.3

Introduction

This document provides a summary description of the proposed physical layer (PHY) for the IEEE 802.16.3 Broadband Fixed Wireless Access standard under development for licensed frequency bands in the range from 2-11 GHz.


The key features of proposed PHY include the following:

- OFDM + QPSK subcarrier modulation
- TDD multiplexing for MMDS bands, FDD supported if permitted by band plan.
- Adaptive space-time channel codes exploiting MIMO transceivers
- Automatic repeat request (ARQ)

This set of innovative features meets the requirements of the 802.16.3 FRD. Whereas existing supercell concepts provide only line-of-sight (LOS) coverage with limited capacity and availability, and highly sectored solutions are impractical due to propagation environment and non-uniform subscriber distribution, the STC-OFDM approach provides high system capacity in non-LOS, multi-cellular environments through the use of combined coding and modulation that is robust with respect to fading and multipath interference.


Channelization

In the U.S., the band 2596 MHz - 2686 MHz is allocated for MMDS application, with the

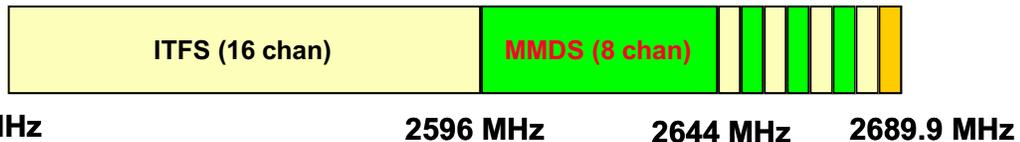

frequencies above 2644 MHz in this band interlaced with ITFS. Each of the MMDS and ITFS channels are 6 MHz wide.

For this frequency allocation, the following strawman frequency plan is proposed for TDD operation.

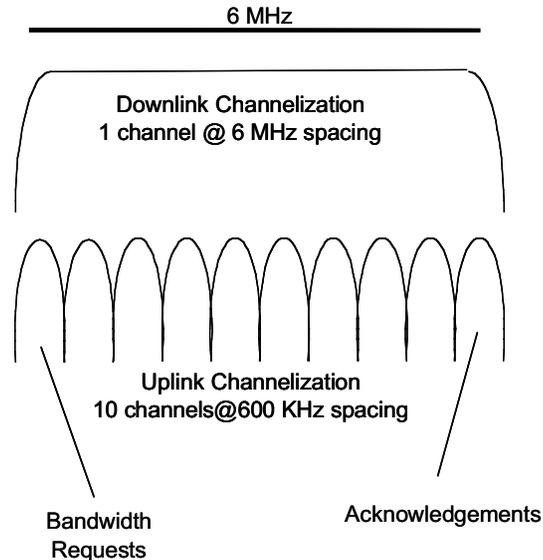

The narrower Uplink Channel reduces transmit power, but still provides sufficient data rate. Frequency slots on the uplink channel may be dedicated for bandwidth requests and / or acknowledgements.

Modulation

The proposed modulation scheme is conventional OFDM with QPSK subcarrier modulation. Pilot symbols are used to facilitate coherent demodulation.

Note that, while higher-order QAM could be supported on the subcarriers, space-time channel coding provides sufficiently high throughput with QPSK modulation. The choice of QPSK is advantageous since high-order modulation is more sensitive to multipath and other impairments. This simplifies design of the transmitter and receivers.

Space-Time Channel Codes

Space-time channel codes exploit the enhanced capacity of Multiple Input/Multiple Output (MIMO) communication systems over fading channels. In order to minimize system complexity, especially with regard to the CPE, the space-time channel coding scheme is selected for a relatively small number of transmit and receive antennas, which may be different at the user terminal and base station.

For reference, we assume 2 transmit/2 receive antennas at user terminal and 4 transmit/4 receive antennas at base station. The channel code is a rate 1/2 trellis-based space-time code (64-state) that provides the user terminal with effective diversity between 3 and 6. Space-time coding can be adaptive by trading diversity for throughput and is compatible

System	Peak Downlink Information Rate (Mbps)		
	5	10	20
Hughes STC+OFDM	2 dB	8 dB	13 dB
Conventional OFDM	6 dB	12 dB	24 dB

as the inner code in a concatenated coding scheme (e.g. with a Reed-Solomon outer code).

Space-time codes have significant advantages when the information rate required is higher than the bandwidth. In the table below, using four TX and two RX antennas, the ability to transmit 20 Mbps over 6 MHz in a Rayleigh fading channel at a C/I consistent with a reuse environment makes it the only viable solution for MMDS applications.

For these results, a frame size of 256 information bits was used, and the target word error rate was 1%. The STC+OFDM advantage is expected to increase for smaller frame error rates.

High efficiency, fast response and low end-to-end error rate achieved through fast acting ARQ with optimized frame size. Note that, in slow fading channels, ARQ should work better for STC than conventional OFDM due to higher diversity levels.

Capacity

Per-cell capacity depends on Uplink / Downlink multiplexing / allocation, and the sectorization / reuse plan.

A conventional 1x3 reuse pattern is supportable with practical subscriber unit antennas. In this case, a 3:1 allocation of capacity between downlink and uplink in the TDD mode achieves 2.5 bps/Hz/cell. Tighter reuse pattern using dual polarization and 4-sectors/cell requires only two 6 MHz frequencies.

In an FDD mode, the per-cell capacity for the downlink is even higher (3.3 bps/Hz/cell for 3:1 reuse, 6.7 bps/Hz/cell for dual polarization, 4 sector/cell).