

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Enhancement of association using SCAN-REQ/RSP	
Date Submitted	2004-05-07	
Source(s)	Sungjin Lee Yeongmoon Son Jungje Son Changhoi Koo Samsung Electronic, Suwon P.O.Box 105, 416, Maetan-3dong, Yeongtong1-gu, Suwon-i., Gyeonggi-do, Korea 442-742	Voice : +82-31-279-5091 Fax : +82-31-279-5130 steve.lee@samsung.com ym1004.son@samsung.com jungje.son@samsung.com chkoo@samsung.com
Re:	This contribution is response to call for contribution about IEEE802.16e-D2	
Abstract	This document proposes the scheme enhancing association operation with SCAN-REQ/RSP	
Purpose	Discuss and Adopt the advanced feature for periodic ranging in sleep mode in the IEEE802.16e group.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:chair@wirelessman.org > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

Enhancement of Association using SCAN-REQ/RSP

Sungjin Lee, Yeongmoon Son, Jungje Son, Changhoi Koo

SAMSUNG Electronics

1. Problem Statement

Currently, in many ways, MSS can get information about neighbor BS and measure SINR value of neighbor BS. MSS can get informed about neighbor BS with NBR-ADV message or scanning another frequency directly. And MSS can measure SINR during scan interval or sleep interval without interruption of service with serving BS. According to the measured SINR values, it can decide whether it handover another BS or not. Further, MSS can get advantage expediting handover process using association with neighbor BS. Association is the process of pre-calibrating parameters needed for ranging with neighbor BS. When MSS decide handoff, MSS can try association with neighbor BS before actual handoff. After association, MSS begin actual handoff process with transmitting MOB-MSSHO-REQ. Therefore we can think association process as the pre-handoff procedure and fast association process shall effect in fast handoff completion after deciding handoff.

However, at current draft 802.16e-D2, there is no specific procedure for association for Scan Interval. In addition, the MSS does not get assistance from serving BS and should access to target BS through random access for scan interval despite negotiation with serving BS for allocation of scan interval.

A MSS may try to make association with as many as candidate Target BSs during the short Scan Interval, it is crucial that the MSS allows fast access to target BS in order to minimize delay time for association.

Our proposed solution can enhance the association process faster than previous algorithm using random access and we can get advantage that actual handoff time will be shortened after deciding handoff. And our solution can avoid MSS trying association to inappropriate neighbor BS that it cannot support continuous services as serving BS provides currently.

Since serving BS can negotiate with target BS for assigning fast_ranging_IE, we can get advantage only using redundant resource of target BS to make handoff procedure easy.

2. Proposed Remedy

Therefore we propose fast access scheme for association operation in order to allow MSS fast access to target BS. A modified SCN-REQ and SCN-RSP message are proposed to enhance MSS operation of association for Scan Interval. SCN-Notification and SCN-Notification-RSP messages are also proposed to inform target BSs of the MSS information.

A MSS trying association can access to target BS with fast UL ranging IE same as handoff case with above proposed messages and scenario.

- SCN-REQ

Scan type field is proposed to indicate whether a MSS requests Scanning or Association. A serving BS may understand what operation the MSS requests and inform the target BSs of that the MSS is

going to try association based on Scan Type field value. Target BS lists are also needed to report which BSs the MSS is trying to associate with.

- SCN-RSP

Scan Type field is also proposed as SCN-REQ. This field may indicate which operation the Serving BS allows to the MSS. When a serving BS orders a MSS to associate with target BSs, a serving BS is able to transmit unsolicited SCN-RSP message to a MSS. In this case, the BS can indicate whether the BS is ordering scanning or association.

- ASC-Notification

Target BS may assign fast UL ranging IE when a MSS is requesting access, it should be informed of which MSS is going to try association. The goal of SCN-Notification is same with HO_pre-notification message.

- ASC-Notification-RSP

Target BS may response to SCN-Notification with reserved BS and QoS resources. The purpose of this message is same with HO_Pre-Notification-RSP.

3. Proposed Text Changes

6.3.2.3.51 Scanning Interval Allocation Request (MOB-SCN-REQ) message

[Modify Table 92e in Page 22, Line 1 – MOB-SCN-REQ Message format as follows]

A MOB-SCN-REQ message may be transmitted by an MSS to request a scanning interval for the purpose of seeking neighbor BS, and determining their suitability as targets for HO. A MSS may perform one of two operation allowed for Scanning Interval as indicated in Scan Type field. A MSS can perform scanning with Scan Type value '0' and association with Scan Type value '1'

An MSS shall generate MOB-SCN-REQ messages in the format shown in Table 92e:

Table 92eg --- MOB-SCN-REQ Message Format

Syntax	Size	Notes
MOB-SCN-REQ_Message_Format() {		
Management message type = 50		
Scan Duration	12 bits	Units are frame
Scan Type	1 bit	[0] Scanning only [1] Association
Reserved	3 bits	
<u>For(j=0; j<N Recommended; j++) {</u>		<u>N Recommended can be derived from the known length of the message</u>
<u>Neighbor BS-ID</u>	48 bits	<u>Target BS-ID for association</u>
<u>}</u>		
}		

The following parameters shall be included in the MOB-SCN-REQ message,

Scan Duration

Duration (in units of frames) of the requested scanning period.

Scan Type

Operation that a MSS intend to for Scanning Interval

Neighbor BS-ID

Target BS list for association

6.3.2.3.51 Scanning Interval Allocation Response (MOB-SCN-RSP) message

[Modify Table 92e in Page 22, Line 1 – MOB-SCN-~~RSPREQ~~ Message format as follows]

A MOB-SCN-RSP message shall be transmitted by the BS in response to an MOB-SCN-REQ message sent by an MSS. In addition, BS may send an unsolicited MOB_SCN_RSP. If a BS transmit unsolicited MOB_SCN_RSP, Scan_Type should have '0' for scanning and '1' for association to indicate which operation the BS intend to. The message shall be transmitted on the basic CID.

The format of the MOB-SCN-RSP message is depicted in Table 92f[S1].

Table 92f --- MOB-SCN-RSP Message Format

Syntax	Size	Notes
MOB-SCN-REQ_Message_Format() {		
Management message type = 51	8 bits	
CID	16 bits	Basic CID of the MSS
Duration	12 bits	<u>Units are framein-frames</u>
Start Frame	4 bits	
Scan Type	<u>1 bit</u>	<u>[0] Scanning</u> <u>[1] Association</u>
Reserved	<u>7 bits</u>	
<u>For(j=0; j<N Recommended; j++) {</u>		<u>N Recommended can be derived from the known length of the message</u>
<u>Neighbor BS-ID</u>	<u>48 bits</u>	
<u>_____ }</u>		
<u>_____ }</u>		

The following parameters shall be included in the MOB-SCN-RSP message:

CID

Basic CID of the MSS that have sent MOB-SCN-REQ message.

Duration

Duration (in units of frames) where the MSS may scan for neighbor BS.

Start Frame


Measured from the frame in which this message was received. A value of zero means that it will start in the next frame.

Scan Type

[0] The BS allows Scanning operation requested by SCN-REQ or the BS intend to let a MSS perform scanning neighbor BS

[1] The BS allows Association operation requested by SCN-REQ or the BS intend to let a MSS perform association with listed in Neighbor BS-ID for Scanning Interval

Figure E.2—Example BS advertisement and scanning (with association) by MSS request

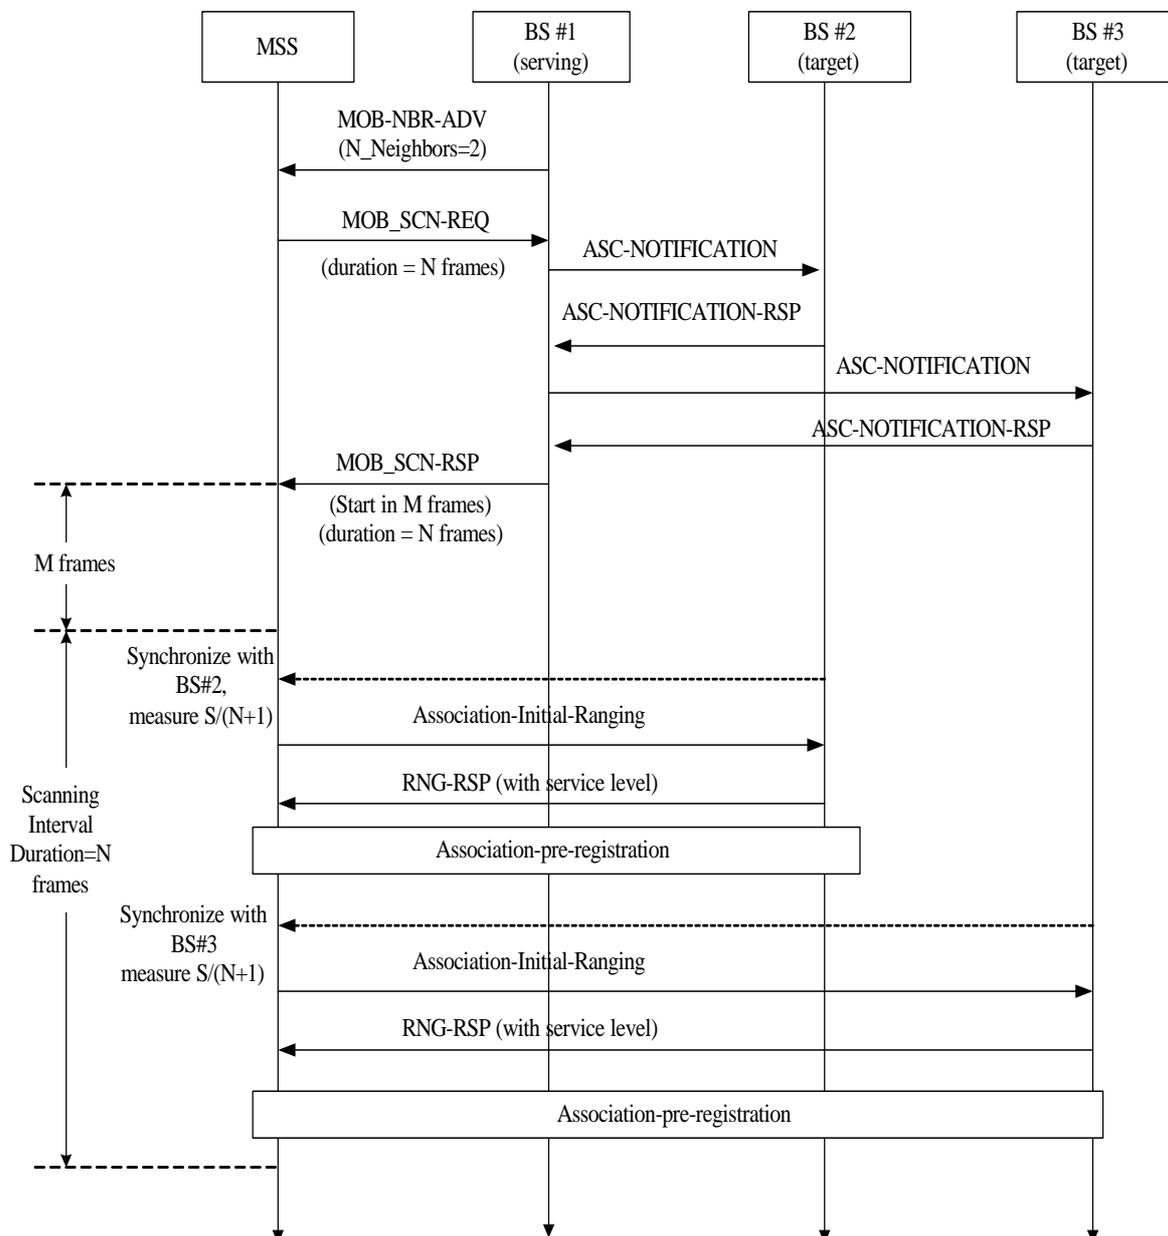

D.2.11 Association-notification (ASC-NOTIFICATION) message

This message is sent from one BS to another BS, typically to request information about a MSS. Typically the message will be sent as a reaction to reception of a SCN-REQ message with Scan_Type=1 or in cases where a BSS is trying to order a MSS to make association.

The message contains the following information

<u>Field</u>	<u>Size</u>	<u>Notes</u>
<u>Global Header</u>	<u>152 bits</u>	
<u>For (j=0; j<Num_Records;j++){</u>	<u>8 bits</u>	
<u>MSS unique ID</u>	<u>48 bits</u>	<u>MAC Address of MSS</u>
<u>Estimated time to start Association</u>	<u>12 bits</u>	<u>Units are frame</u>
<u>Required BW</u>	<u>4 bits</u>	
<u>For (i=0; i<Num_SFID_Records: i++){</u>		<u>[0] Scanning</u> <u>[1] Association</u>
<u>SFID</u>	<u>32 bits</u>	<u>N Recommended can be derived from the known length of the message</u>
<u>For (i=0; i<Num_SFID_Records: i++){</u>		
<u>Required QoS</u>	<u>variable</u>	
<u>}</u>		
<u>}</u>		
<u>}</u>		
<u>Security Field</u>	<u>TBD</u>	

D.2.11 Association-notification response (ASC-NOTIFICATION-RSP) message

This message is sent from one BS to another BS, typically in response to a SCN-NOTIFICATION message. The message served to provide the BS that sent the ASC-NOTIFICATION message with information about the level of service the MSS could expect if it may try association with this BS. The message contains the following information.

<u>Field</u>	<u>Size</u>	<u>Notes</u>
<u>Global Header</u>	<u>152 bits</u>	
<u>For (j=0; j<Num_Records;j++){</u>	<u>8 bits</u>	

<u>MSS unique ID</u>	<u>48bits</u>	
<u>BW estimated</u>	<u>8 bits</u>	
<u>QoS estimated</u>	<u>variable</u>	
<u>↓</u>		
<u>Security Field</u>	<u>TBD</u>	