

# Proposed modifications to 100GBASE-DR

Matt Traverso, Cisco

Marco Mazzini, Cisco

Hai-Feng Liu, Intel

# Supporters

- Brian Welch, Luxtera
- Gary Nicholl, Cisco
- your name could be here...

# Background and Motivation

Slide has no changes compared to traverso\_020817\_3cd\_adhoc-v2

- The MPI (multi-path interference) penalty is a consequence of reflections within the channel medium. These reflections are expected to be challenging to measure and characterize in deployed networks
- In clause 124 (400GBASE-DR4), Table 124-13 describes the maximum number of discrete reflectances  $> -55$  dB within the channel which the PMD can support
- The single column of reflectance tradeoffs in Table 124-13 is consistent with the expected deployed medium which consists of parallel fiber.
- Clause 140 (100GBASE-DR) which is defined over a duplex fiber pair is expected to be deployed over a mix of media – both parallel and duplex
- For example, see [kolesar 3bs 01 0514](#), where a common fiber topology of a mixed duplex and parallel fiber is shown
- To support the heterogeneous environment of Clause 140, this presentation proposes to show impact of multiple magnitudes of reflectances
- Furthermore, we propose to tradeoff the MPI penalty with the supported channel loss

# Methodology Used

Slide has no changes compared to traverso\_020817\_3cd\_adhoc-v2

## 1) Reflectances:

- Transmitter and Receiver are modeled to each have -26 dB reflectance
- Using combination of -35 dB reflectances & -45 dB reflectances in channel
  - In the table these will be -35 dB to -45 dB reflectances and -45 dB to -55 dB reflectances respectively
- Insert text stating that the effect of < -55dB reflectances may be ignored

## 2) MPI Calculation:

- Using [king\\_02a\\_0116\\_smf](#) spreadsheet for MPI calculation
- Using zero loss for connectors – *pessimistic*
- Using 3 dB in end-span insertion loss – as was done in Table 124-13 (400GBASE-DR4)

## 3) Link Budget Calculation:

- Channel insertion loss is 3 dB
- If MPI penalty is > 0.15 dB, then the penalty will be subtracted from 3.1 dB
- If MPI penalty is > 0.50 dB, the table will indicate that such channel is not supported

# Maximum Optical Return Loss

- To determine the RIN parameter settings, it is important to specify the maximum optical return loss
- Below is a table capturing the return loss
  - Field addition with receiver, without loss in the channel

| Optical Return Loss  |   | Number of discrete reflectances $\leq -45$ dB and $> -55$ dB |       |       |       |       |       |       |       |       |
|--|---|--|-------|-------|-------|-------|-------|-------|-------|-------|
|  |   | 0  | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     |
| Number of discrete reflectances $\leq -35$ dB and $> -45$ dB | 0 |  | 25.08 | 24.24 | 23.48 | 22.78 | 22.13 | 21.53 | 20.97 | 20.44 |
|  | 1 | 23.36  | 22.67 | 22.03 | 21.44 | 20.88 | 20.35 | 19.86 | 19.39 | 18.95 |
|  | 2 | 21.34  | 20.79 | 20.27 | 19.78 | 19.32 | 18.88 | 18.46 | 18.06 | 17.68 |
|  | 3 | 19.70  | 19.24 | 18.81 | 18.39 | 18.00 | 17.62 | 17.25 | 16.90 | 16.57 |
|  | 4 | 18.33  | 17.93 | 17.56 | 17.19 | 16.85 | 16.51 | 16.19 | 15.88 | 15.59 |
|  | 5 | 17.14  | 16.79 | 16.46 | 16.14 | 15.84 | 15.54 | 15.25 | 14.97 | 14.70 |
|  | 6 | 16.09  | 15.79 | 15.49 | 15.20 | 14.93 | 14.66 | 14.40 | 14.15 | 13.90 |

**x.yz** = these values either exceed the proposed MPI penalty limit or the number of connections exceeded the capability of the spreadsheet

Table is for reference – not to be included in standard

# MPI penalty

For reference – not to be included in standard

| MPI Penalty  |   | Number of discrete reflectances $\leq -45$ dB and $> -55$ dB |      |      |      |      |      |      |      |      |
|--|---|--|------|------|------|------|------|------|------|------|
|  |   | 0  | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    |
| Number of discrete reflectances $\leq -35$ dB and $> -45$ dB | 0 | 0  | 0.02 | 0.03 | 0.04 | 0.05 | 0.06 | 0.07 | 0.08 | 0.10 |
|  | 1 | 0.05   | 0.06 | 0.05 | 0.09 | 0.11 | 0.12 | 0.11 | 0.15 | 0.12 |
|  | 2 | 0.1  | 0.12 | 0.13 | 0.16 | 0.19 | 0.2  | 0.22 | 0.23 | 0.22 |
|  | 3 | 0.18   | 0.18 | 0.2  | 0.2  | 0.24 | 0.3  | 0.3  | 0.32 | *    |
|  | 4 | 0.26   | 0.27 | 0.32 | 0.34 | 0.36 | 0.4  | 0.41 | *    | *    |
|  | 5 | 0.32   | 0.33 | 0.38 | 0.4  | 0.44 | 0.48 | *    | *    | *    |
|  | 6 | 0.45   | 0.48 | 0.51 | 0.54 | 0.57 | *    | *    | *    | *    |

**x.yz** = these values exceed the proposed MPI penalty limit – see slide 3

\* = This combination of reflectances exceeds the number of connections supported in the Jonathan King spreadsheet, so were not calculated

# Proposed Addition of new table & supporting text

Insert text: Discrete reflectances below -55 dB may be ignored when determining supported channel insertion loss

| Channel Insertion Loss                                       |   | Number of discrete reflectances $\leq -45$ dB and $> -55$ dB |     |     |     |     |     |     |     |     |
|--|---|--|-----|-----|-----|-----|-----|-----|-----|-----|
|  |   | 0  | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   |
| Number of discrete reflectances $\leq -35$ dB and $> -45$ dB | 0 | 3.0  | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
|  | 1 | 3.0  | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
|  | 2 | 3.0  | 3.0 | 3.0 | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 |
|  | 3 | 2.9  | 2.9 | 2.9 | 2.9 | 2.9 | 2.8 | 2.8 | 2.8 | *   |
|  | 4 | 2.8  | 2.8 | 2.8 | 2.8 | 2.7 | 2.7 | 2.7 | *   | *   |
|  | 5 | 2.8  | 2.8 | 2.7 | 2.7 | 2.7 | 2.6 | *   | *   | *   |
|  | 6 | 2.7  | 2.6 | *   | *   | *   | *   | *   | *   | *   |

\* = This combination of reflectances is not supported

# Recommended Changes to Draft 1.2 (I)

Table 140–6—100GBASE-DR transmit characteristics

| Description   | Value            | Unit  |
|---|------------------|-------|
| Signaling rate (range)  | 53.125 ± 100 ppm | GBd   |
| Modulation format   | PAM4             | —     |
| Wavelength (range)  | 1304.5 to 1317.5 | nm    |
| Side-mode suppression ratio (SMSR), (min)                                     | 30               | dB    |
| Average launch power (max)  | 4                | dBm   |
| Average launch power <sup>a</sup> (min)                                       | -2.3             | dBm   |
| Outer Optical Modulation Amplitude (OMA <sub>outer</sub> ) (max)              | 4.2              | dBm   |
| Outer Optical Modulation Amplitude (OMA <sub>outer</sub> ) (min) <sup>b</sup> | -0.2             | dBm   |
| Launch power in OMA <sub>outer</sub> minus TDECQ (min)                        | -1.2             | dBm   |
| Transmitter and dispersion eye closure for PAM4 (TDECQ) (max)                 | 2.5              | dB    |
| Average launch power of OFF transmitter (max)                                 | -20              | dBm   |
| Extinction ratio (min)  | 5                | dB    |
| RIN <sub>21.4</sub> OMA (max)   | -142             | dB/Hz |
| Optical return loss tolerance (max)   | 21.4             | dB    |
| Transmitter reflectance <sup>c</sup> (max)                                    | -26              | dB    |

Slide has no changes compared to traverso\_020817\_3cd\_adhoc-v2

- Change to -2.4 to align to DR4
- Change to -0.3 to align to DR4
- Change to -1.3 to align to DR4
- Change to RIN<sub>15.5</sub> OMA
- Change to 15.5 dB



# Recommended Changes to Draft 1.2 (II)

Table 140-7—100GBASE-DR receive characteristics

| Description  | Value            | Unit |
|--|------------------|------|
| Signaling rate (range)   | 53.125 ± 100 ppm | GBd  |
| Modulation format  | PAM4             | —    |
| Wavelengths (range)  | 1304.5 to 1317.5 | nm   |
| Damage threshold <sup>a</sup>  | 6.5              | dBm  |
| Average receive power (max)  | 4                | dBm  |
| Average receive power <sup>b</sup> (min)                                 | -5.3             | dBm  |
| Receive power (OMA <sub>outer</sub> ) (max)                              | 4.2              | dBm  |
| Receiver reflectance (max)   | -26              | dB   |
| Receiver sensitivity (OMA <sub>outer</sub> ) <sup>c</sup> (max)          | -4.5             | dBm  |
| Stressed receiver sensitivity (OMA <sub>outer</sub> ) <sup>d</sup> (max) | -2               | dBm  |
| Conditions of stressed receiver sensitivity test: <sup>e</sup>           |                  |      |
| Stressed eye closure for PAM4 (SECQ)                                     | 2.5              | dB   |

→ Change to -5.4 to align to DR4

→ Change to -4.4 to align to DR4

→ Change to -1.9 to align to DR4

Table 140-8—100GBASE-DR illustrative link power budget

| Parameter   | Value          | Unit |
|---|----------------|------|
| Power budget (for max TDECQ)                          | 5.8            | dB   |
| Operating distance                                    | 500            | m    |
| Channel insertion loss <sup>a</sup>                   | 3              | dB   |
| Maximum discrete reflectance                          | See 140.10.2.2 | dB   |
| Allocation for penalties <sup>b</sup> (for max TDECQ) | 2.8            | dB   |
| Additional insertion loss allowed                     | 0              | dB   |

→ Change to 5.6 dB to align to DR4

→ Change to “See 140.10.2.2”

→ Change to -35 dB

→ Change to “5.6 – max channel insertion loss per 140.10.2.2”

# Recommended Changes to Draft 1.2 (III)

Table 140–8—100GBASE-DR illustrative link power budget

| Parameter   | Value          | Unit |
|---|----------------|------|
| Power budget (for max TDECQ)                          | 5.8            | dB   |
| Operating distance                                    | 500            | m    |
| Channel insertion loss <sup>a</sup>                   | 3              | dB   |
| Maximum discrete reflectance                          | See 140.10.2.2 | dB   |
| Allocation for penalties <sup>b</sup> (for max TDECQ) | 2.8            | dB   |
| Additional insertion loss allowed                     | 0              | dB   |

Change to 5.6 dB to align to DR4

Change to “See 140.10.2.2”

Change to -35 dB

Change to “5.6 – max channel insertion loss per 140.10.2.2”

Add footnote for these parameters stating, higher penalties may be supported with reduced channel insertion loss. See 140.10.2.2

# Recommended Changes to Draft 1.2 (IV)

Table 140–11—Fiber optic cabling (channel) characteristics

| Description                                  | 100GBASE-DR | Unit  |
|--|-------------|-------|
| Operating distance (max)                     | 500         | m     |
| Channel insertion loss <sup>a, b</sup> (max) | 3           | dB    |
| Channel insertion loss (min)                 | 0           | dB    |
| Positive dispersion <sup>b</sup> (max)       | 0.8         | ps/nm |
| Negative dispersion <sup>b</sup> (min)       | −0.93       | ps/nm |
| DGD_max <sup>c</sup>                         | 2.24        | ps    |
| Optical return loss (min)                    | 37          | dB    |

Change to “See 140.10.2.2”

Update value to 27 dB

# Recommended Changes to Draft 1.2 (V)

## replace table 140-13 & add text

Slide has no changes compared to traverso\_020817\_3cd\_adhoc-v2

Insert text: Discrete reflectances below -55 dB may be ignored when determining supported channel insertion loss

Table 140-13 – Maximum channel insertion loss based on reflectances

~~Table 140-13—Maximum value of each discrete reflectance~~

| Number of discrete reflectances above -55 dB | Maximum value for each discrete reflectance |
|--|---|
|  | 100GBASE-DR                                 |
| 1  | -37 dB                                      |
| 2  | -42 dB                                      |
| 4  | -45 dB                                      |
| 6  | -47 dB                                      |
| 8  | -48 dB                                      |
| 10   | -49 dB                                      |

| Channel Insertion Loss                                       |   | Number of discrete reflectances $\leq -45$ dB and $> -55$ dB |     |     |     |     |     |     |     |     |
|--|---|--|-----|-----|-----|-----|-----|-----|-----|-----|
|  |   | 0  | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   |
| Number of discrete reflectances $\leq -35$ dB and $> -45$ dB | 0 | 3.0  | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
|  | 1 | 3.0  | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
|  | 2 | 3.0  | 3.0 | 3.0 | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 |
|  | 3 | 2.9  | 2.9 | 2.9 | 2.9 | 2.9 | 2.8 | 2.8 | 2.8 | *   |
|  | 4 | 2.8  | 2.8 | 2.8 | 2.8 | 2.7 | 2.7 | 2.7 | *   | *   |
|  | 5 | 2.8  | 2.8 | 2.7 | 2.7 | 2.7 | 2.6 | *   | *   | *   |
|  | 6 | 2.7  | 2.6 | *   | *   | *   | *   | *   | *   | *   |

\* = This combination of reflectances is not supported

# Recommended Changes to Draft 1.2 (VI)

Table 140–10—Test-pattern definitions and related subclauses

| Parameter  | Pattern   | Related subclause |
|--|---|-------------------|
| Wavelength   | Square wave, 3, 4, 5, 6 or valid 50GBASE-R signal | 140.7.2           |
| Side mode suppression ratio                                | 3, 5, 6 or valid 50GBASE-R signal                 | —                 |
| Average optical power                                      | 3, 5, 6 or valid 50GBASE-R signal                 | 140.7.3           |
| Outer Optical Modulation Amplitude (OMA <sub>outer</sub> ) | 4 or 6  | 140.7.4           |
| Transmitter and dispersion eye closure for PAM4 (TDECQ)    | 6   | 140.7.5           |
| Extinction ratio   | 4 or 6  | 140.7.6           |
| RIN <sub>21.4</sub> OMA                                    | 4   | 140.7.7           |
| Stressed receiver conformance test signal calibration      | 6   | 140.7.9           |
| Stressed receiver sensitivity                              | 3 or 5  | 140.7.9           |

Update to RIN<sub>15.5</sub>OMA

## 140.7.5 Transmitter and dispersion eye closure for PAM4 (TDECQ)

The TDECQ shall be within the limits given in Table 140–6 if measured using the methods specified in 121.8.5.1, 121.8.5.2, and 121.8.5.3 using a reference equalizer as described in 121.8.5.4, with the following exceptions:

- The signaling rate of the test pattern generator is as given in Table 140–6.
- There are no interfering optical lanes and therefore the delay requirement of at least 31 UI between test pattern on one lane and any other lane, as specified in 121.8.5.1, is redundant.
- The combination of the O/E converter and the oscilloscope has a fourth-order Bessel-Thomson filter response with a bandwidth of 38.68 GHz.


Add bullet to section 140.7.5 stating,  
- The optical return loss shall correspond to Table 140-11

# Summary

- Proposed to use the total of link loss and MPI penalty in 100GBASE-DR link budget consideration, which would
  - resolve the debate on MPI penalty in the link budget,
  - support more channel usage cases, and
  - keep the same Tx OMA(min) and Rx sensitivity specifications as those in 400GBASE-DR4.
  - enable tradeoff of MPI penalty and channel insertion loss
- Calculated optical return loss for 100GBASE-DR usage cases which gave 15.5 dB as the worst case ORL.
- Plan to submit comment against D1.2 recommending that the editor adopt the remedies listed slides 8 through 13 in this presentation with editorial license

# backup

# 400GBASE-DR4 Reference

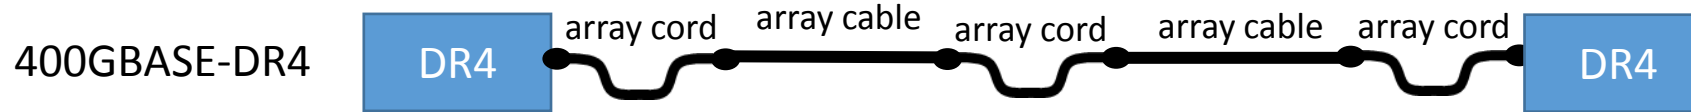

## 500m Double link with 4 MPO connectors

Connector Losses = 2.65 dB,

Fiber loss = 0.25dB,

-> Link Loss = 2.9 dB (rounded to 3 dB)

MPI Penalty = 0.1 dB

Agreed Budget = 3.1 dB

Table 124–13—Maximum value of each discrete reflectance


| Number of discrete reflectances above -55 dB | Maximum value for each discrete reflectance |
|--|---|
| 1  | -37 dB                                      |
| 2  | -42 dB                                      |
| 4  | -45 dB                                      |
| 6  | -47 dB                                      |
| 8  | -48 dB                                      |
| 10   | -49 dB                                      |

*this screenshot is from D2.2*



# Example: 4LCs + 3MPOs

|                           | PMD  |       |       |       |       |       |       |       |       |       |       | PMD  |
|---------------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
|                           | R 1  | R 2   | R 3   | R 4   | R 5   | R 6   | R 7   | R 8   | R 9   | R 10  | R 11  | R 12 |
|                           | Rpmd | RconF | RconG | RconG | RconH | RconK | RconK | RconH | RconG | RconG | RconF | Rpmd |
| Reflection level inputs-> | -26  | -35   | -35   | -35   | -35   | -45   | -45   | -45   | -1000 | -1000 | -1000 | -26  |

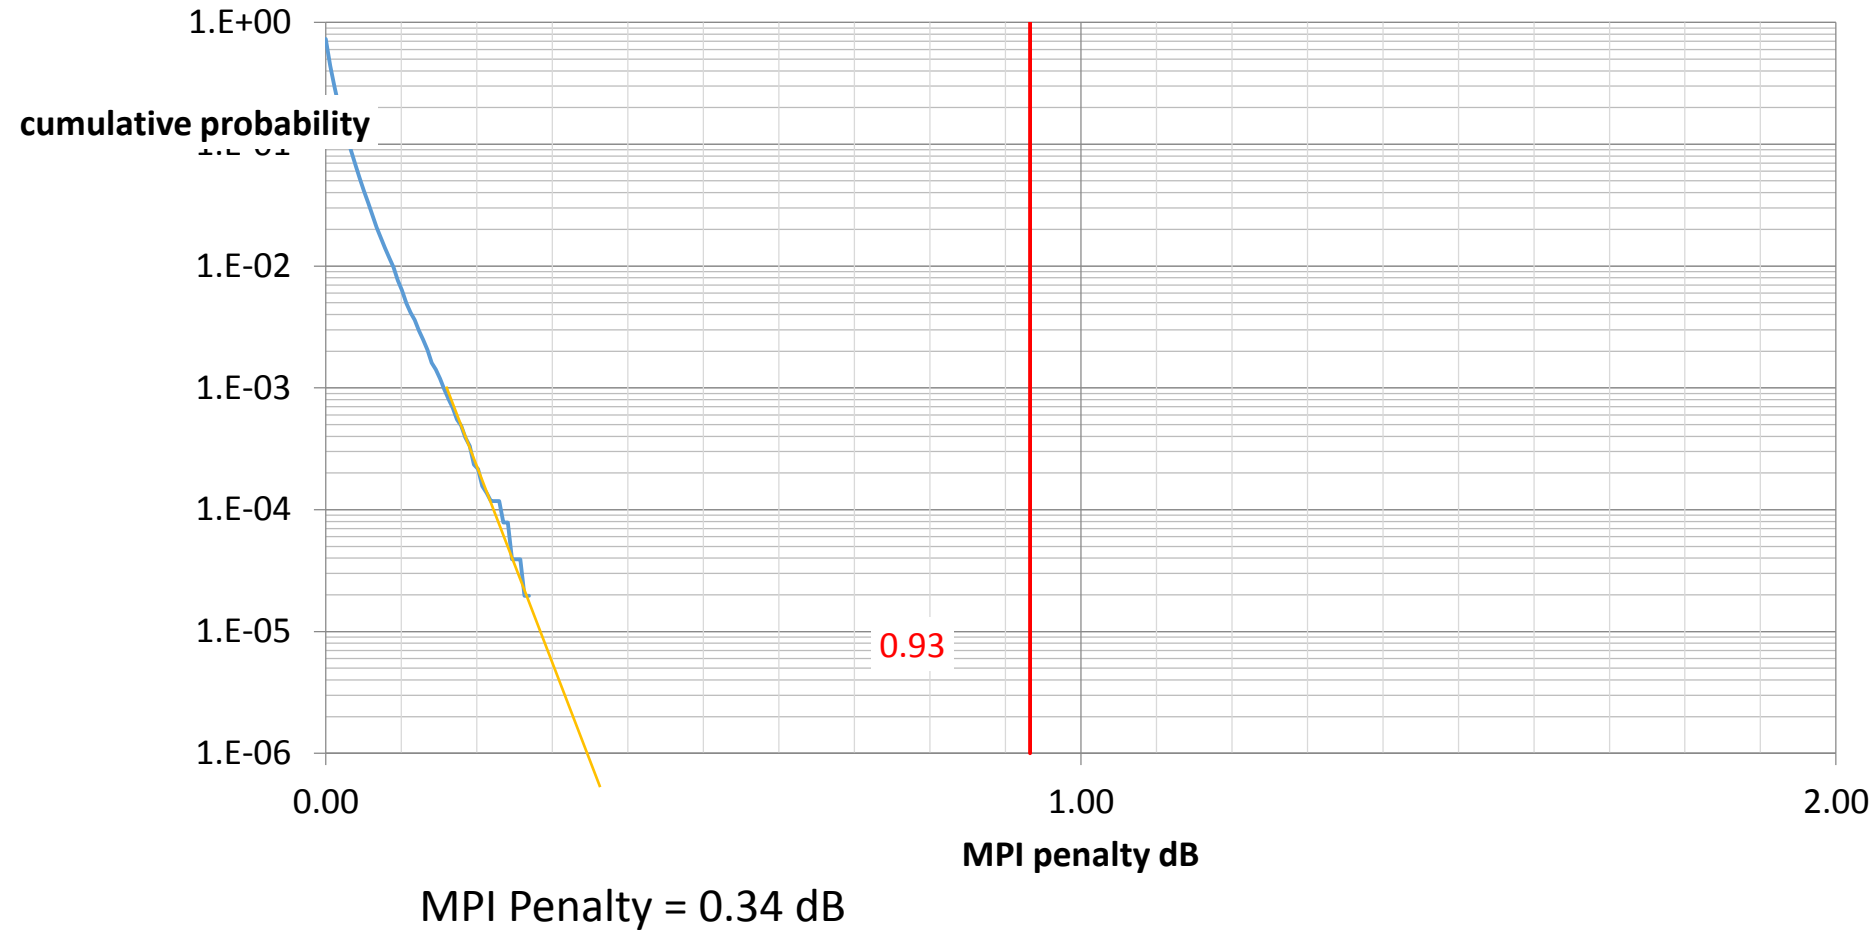

# Example: 4LCs + 4 MPOs

| PMD  |       |       |       |       |       |       |       |       |       |       | PMD  |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| R 1  | R 2   | R 3   | R 4   | R 5   | R 6   | R 7   | R 8   | R 9   | R 10  | R 11  | R 12 |
| Rpmd | RconF | RconG | RconG | RconH | RconK | RconK | RconH | RconG | RconG | RconF | Rpmd |
| -26  | -35   | -35   | -35   | -35   | -45   | -45   | -45   | -45   | -1000 | -1000 | -26  |

