

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >
Title	Proposed Text for the IEEE P802.16m/D1: Multi-carrier Operation for Femtocell ABS 15.4.x
Date Submitted	2009-8-24
Source(s)	Motoki Morita, Nader Zein, Nader.zein@eu.nec.com Linghang Fan, Tetsu Ikeda, Hassan Al-Kanani NEC
Re:	P802.16m/D1 Femto 15.4.x
Abstract	This contribution provides a scheme allowing multi-carrier operation for Femtocell ABS.
Purpose	For discussion and approval by IEEE 802.16m TG
Notice	<i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.</i>
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.
Patent Policy	The contributor is familiar with the IEEE-SA Patent Policy and Procedures: < http://standards.ieee.org/guides/bylaws/sect6-7.html#6 > and < http://standards.ieee.org/guides/opman/sect6.html#6.3 >. Further information is located at < http://standards.ieee.org/board/pat/pat-material.html > and < http://standards.ieee.org/board/pat >.

Proposed Text for the IEEE 802.16m/D1: Multi-carrier Operation for Femtocell

ABS

Motoki Morita, Nader Zein Linghang Fan, Tetsu Ikeda, Hassan Al-Kanani

NEC

1 Introduction

This contribution proposes a scheme that allows multi-carrier operation for Femtocell ABS without increasing interference to macro/micro cells.

2 Multi-carrier Operation

2.1 Multi-carrier Operation for Femtocell ABS

Multi-carrier operation may be supported by Femtocell ABS as depicted in Fig.1. All operational principles for multi-carrier operation also apply to a system involving Femtocell ABS unless explicitly stated otherwise. In this way, Femtocell ABS can assign a secondary carrier to an MS in addition to a primary carrier.

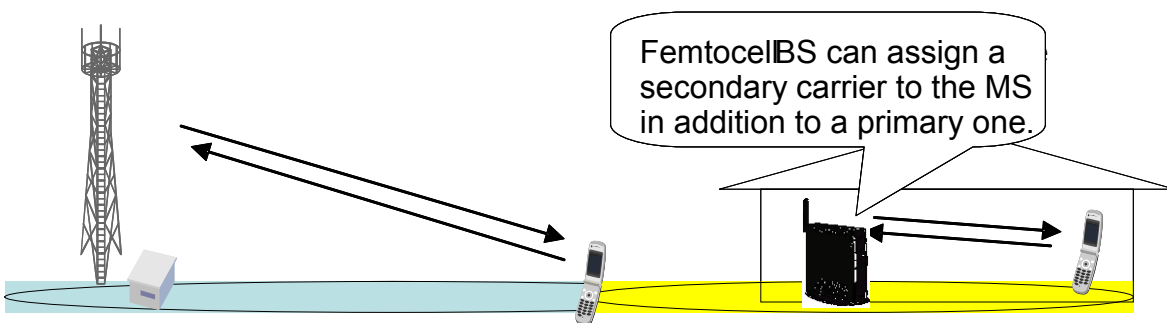


Fig.1 Illustration of the concept of multi-carrier operation for Femtocell ABS.

2.2 Interference in Multi-carrier Operation for Femtocells

If the secondary carrier of Femtocell ABS happens to be the same carrier as the one used by macro/micro cell, the interference from Femtocell to macro/micro cell will subsequently increase. An illustration of this scenario is demonstrated in Fig. 2 below.

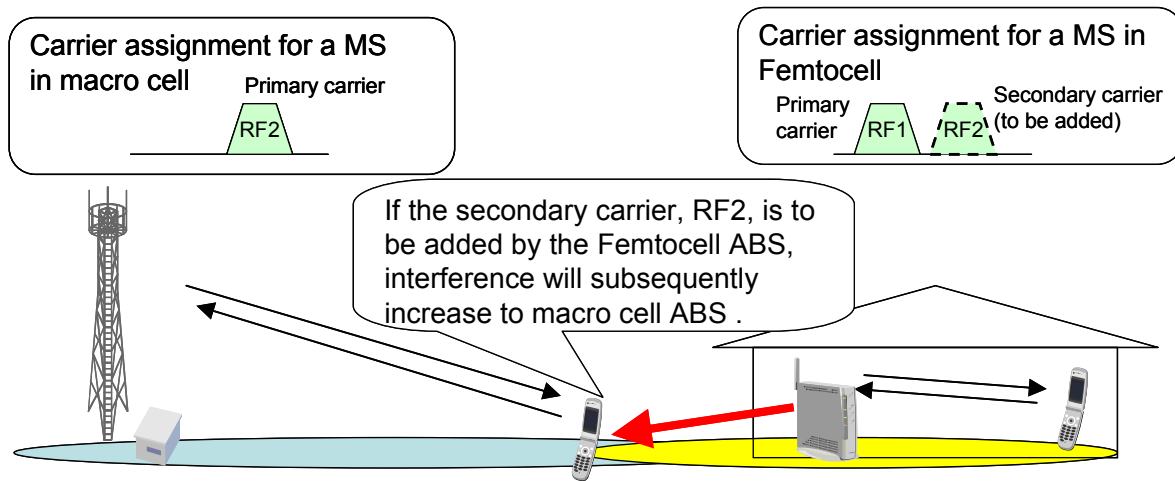


Fig.2 Illustration of the scenario of interference increase in multi-carrier operation for Femtocell ABS.

2.3 Proposed Scheme for Interference Mitigation in Multi-carrier Operation

In order to enable the necessary interference avoidance or interference mitigation schemes, the Femtocell ABS shall be capable to scan the signals transmitted from neighbor ABSs and measures the signal strength. Based on these measurements, the Femtocell ABS selects a primary carrier which has a minimum interference impact on macro/micro MSs. In this case the macro MSs will receive little interference from the Femtocell ABS even if they move closer to the Femtocell ABS.

In case of multi-carrier operation for Femtocell ABS, Femtocell ABS should also consider interference avoidance or interference mitigation when assigning the secondary carrier.

According to the secondary carrier management, macro ABS decides the activation or deactivation of secondary carrier(s) based on load condition of carriers and may transmit the list of active carriers to the AMS.

Transmit power for each carrier of the macro ABS may be used as the load condition. If the interference from Femtocell ABS to macro MS becomes large, the transmit power increase of the macro ABS will not help. Subsequently if the load condition for a carrier exceeds certain threshold, the macro ABS requests a deactivation of the secondary carrier and transmits the decision to Femtocell ABS as shown in Fig.3 below. The Femtocell ABSs can receive the deactivation information at an initial setting or during an unavailable interval in the low duty operation mode. The Femtocell ABSs will in this case avoid using this carrier as the secondary carrier.

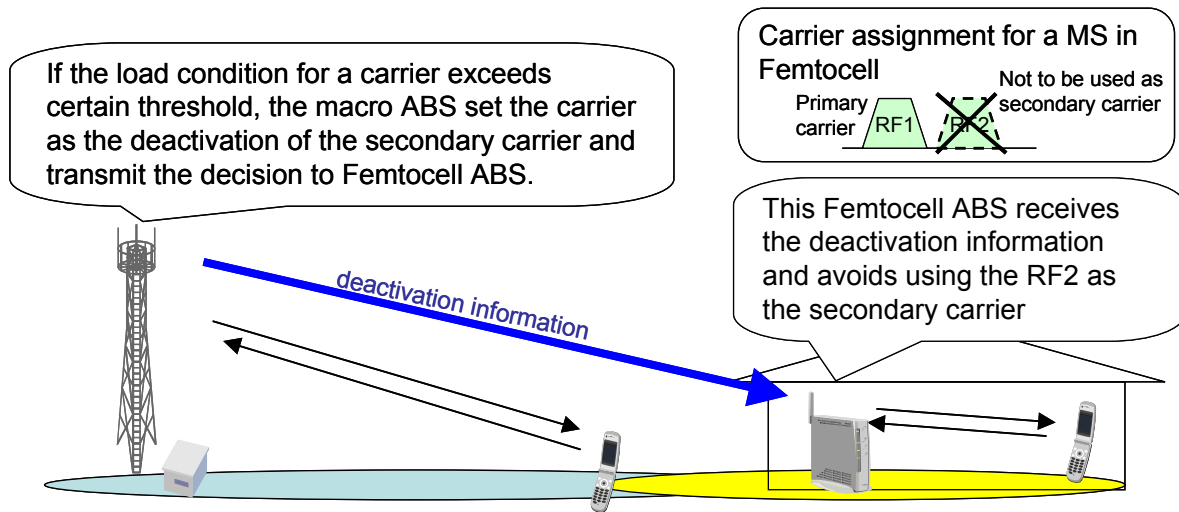


Fig.3 Proposed Scheme for interference mitigation in multi-carrier operation.

----- Proposed text -----
 ++++++

15.4.x Multi-carrier Operation (Related to Sec. 15.16 in SDD)

Multi-carrier operation may be supported by Femtocell ABS. All operational principles for multi-carrier operation also apply to a system involving Femtocell ABS unless explicitly stated otherwise. Femtocell ABS may assign a secondary carrier to an AMS in addition to a primary carrier.

In order to enable the interference avoidance or interference mitigation schemes, the Femtocell ABS shall be capable to scan the signals transmitted from neighbor ABSs and measure the signal strength. The Femtocell ABS selects a primary carrier which has a minimum interference impact on macro/micro MSs based on the measurement.

According to the secondary carrier management, macro ABS decides the activation or deactivation of secondary carrier(s) based on load condition of carriers and may transmit the list of active carriers to the AMS. If the load condition for a carrier exceeds certain threshold, the macro ABS requests a deactivation of the secondary carrier and transmits the decision to Femtocell ABS. The Femtocell ABSs can receive the deactivation information at an initial setting or during an unavailable interval in low duty operation mode. The Femtocell ABSs shall in this case avoid using this carrier as a secondary carrier.

+++++