

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>Enhancements to UCP LBT: Supporting simulation results</b>	
Date Submitted	<b>2007-09-07</b>	
Source(s)	Paul Piggin NextWave Broadband Inc. 12670 High Bluff Drive San Diego CA 92130 USA	Voice: 1 858 480 3100 Fax: 1 858 480 3105 ppiggin @ nextwave.com
Re:	IEEE 802.16h-07/019 Task Group Review of P802.16h/D2c.	
Abstract	This document contains supporting simulation results for the UCP LBT feature enhancements as detailed in IEEE C802.16h-07/078.	
Purpose		
Notice	<i>This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.</i>	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy	The contributor is familiar with the IEEE-SA Patent Policy and Procedures: < <a href="http://standards.ieee.org/guides/bylaws/sect6-7.html#6">http://standards.ieee.org/guides/bylaws/sect6-7.html#6</a> > and < <a href="http://standards.ieee.org/guides/opman/sect6.html#6.3">http://standards.ieee.org/guides/opman/sect6.html#6.3</a> >. Further information is located at < <a href="http://standards.ieee.org/board/pat/pat-material.html">http://standards.ieee.org/board/pat/pat-material.html</a> > and < <a href="http://standards.ieee.org/board/pat">http://standards.ieee.org/board/pat</a> >.	

# Enhancements to UCP LBT: Supporting simulation results

*Paul Piggin*  
*NextWave Broadband Inc.*

## Overview

This contribution contains supporting simulation results for the UCP LBT (Listen Before Talk) feature enhancements as detailed in IEEE C802.16h-07/078 [2]. The results are intended to show:

- Benefits of the enhancements to the LBT feature detailed in [2].
- Equitable fair sharing of the channel between the present in systems.
- Low Frame Error Rates.

## Simulation analysis

### The simulation scenario

For ease of understanding and to fully quantify the feature's performance within a simulation environment the scenario presented in Figure 1 was adopted in the generation of all results.

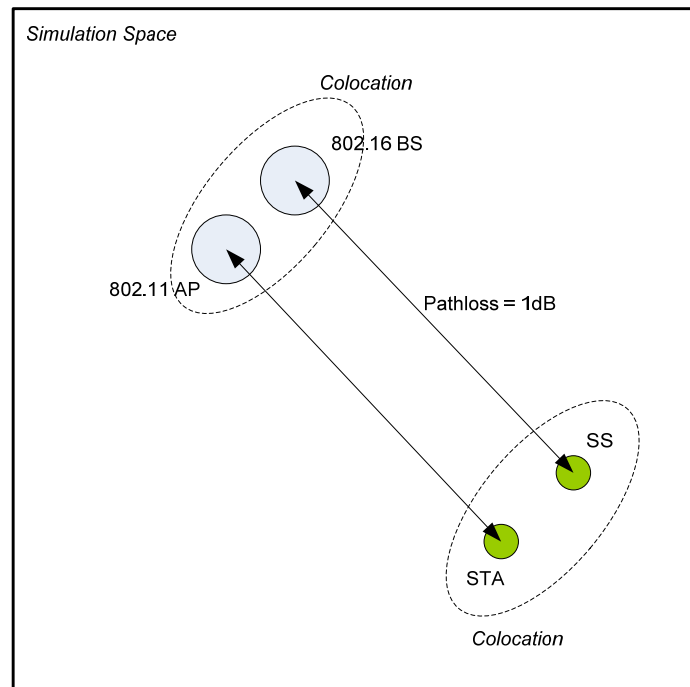


Figure 1 The simulation scenario used to produce all simulation results presented.

*Simulation assumptions:*

- These results are based on parameters contained within the 802.19 3.65GHz simulation parameters document [3].
- Each BS (Base Station)/AP (Access Point) has a single associated SS (Subscriber Station)/STA (Station).
- One 802.16 system (10MHz channel) with full access to the channel sees a maximum throughput rate:
  - DL = ~17.8Mbps.
  - UL = ~9.1Mbps
- One 802.11 system (10MHz channel) with full access to the channel sees a maximum throughput rate:
  - DL = ~13.5Mbps.
  - UL = ~13.5Mbps.
- Two 802.16 system (10MHz channel) with full access to the channel sees a maximum throughput rate:
  - DL = ~8.9Mbps.
  - UL = ~4.5Mbps
- Two 802.11 system (10MHz channel) with full access to the channel sees a maximum throughput rate:
  - DL = ~6.6Mbps.
  - UL = ~6.6Mbps.

*Why is channel occupancy a good metric for analysis?*

MAC level fairness: At THE MAC level, the amount of time that a system is radiating energy on the channel, including overhead, ACKs, CTS, whatever, is assumed to be “good use of the channel”. Systems shouldn’t be penalized because they are inherently more “good” in their use of the channel. For instance, if the MAC level simulation shows equal opportunity to transmit, yet one system gets higher throughput and better access latency, that’s just because that particular system is inherently more efficient.

**Simulation results**

The following scenarios have been simulated.

NB: The  $K$  factor is detailed in [2] and is the *Aggressiveness Factor* of an 802.16 system in ensuring it’s target utilization factor is maintained.

Scenarios A through M consider an increasing offered load where the increase in load is the same for the case of both 802.16 and 802.11.

**Scenario A:** 1 x 802.16 system alone [ $K = 1$ ].

**Scenario B:** 1 x 802.11 system alone [ $K = 1$ ].

**Scenario C:** 2 x 802.16 systems alone [ $K = 1$ ].

**Scenario D:** 2 x 802.11 systems alone [ $K = 1$ ].

**Scenario E:** 1 x 802.16 system + 1 x 802.11 system [ $K = 1$ ].

**Scenario F:** 2 x 802.16 systems + 1 x 802.11 system [ $K = 1$ ].

**Scenario G:** 1 x 802.16 system + 2 x 802.11 systems [ $K = 1$ ].

**Scenario H:** 2 x 802.16 systems + 2 x 802.11 systems [ $K = 1$ ].

**Scenario I:** 3 x 802.16 systems + 2 x 802.11 systems [ $K = 1$ ].

**Scenario J:** 2 x 802.16 systems + 3 x 802.11 systems [ $K = 1$ ].

**Scenario K:** 3 x 802.16 systems + 3 x 802.11 systems [ $K = 1$ ].

**Scenario L:** 1 x 802.16 system + 1 x 802.11 system [ $K = 2$ ].

**Scenario M:** 1 x 802.16 system + 1 x 802.11 system [ $K = 4$ ].

**Scenario N:** 1 x 802.16 system + 1 x 802.11 system [ $K = 1$ ] {802.16 load fixed at channel capacity}

**Scenario O:** 1 x 802.16 system + 1 x 802.11 system [ $K = 1$ ] {802.16 load fixed at channel capacity}.

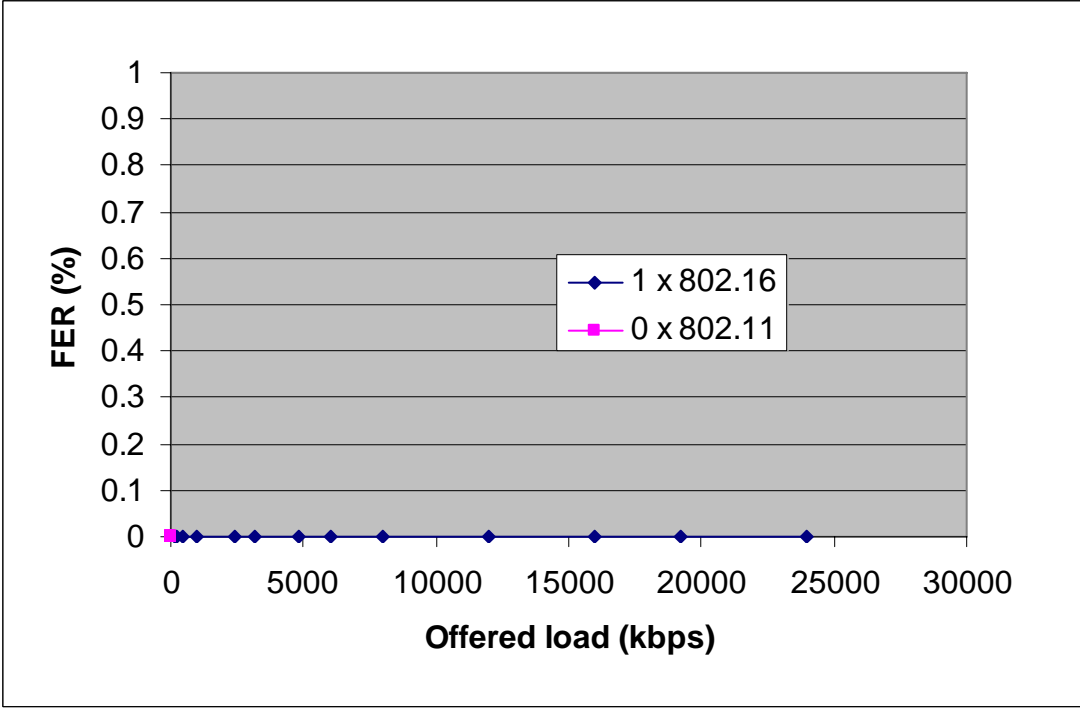
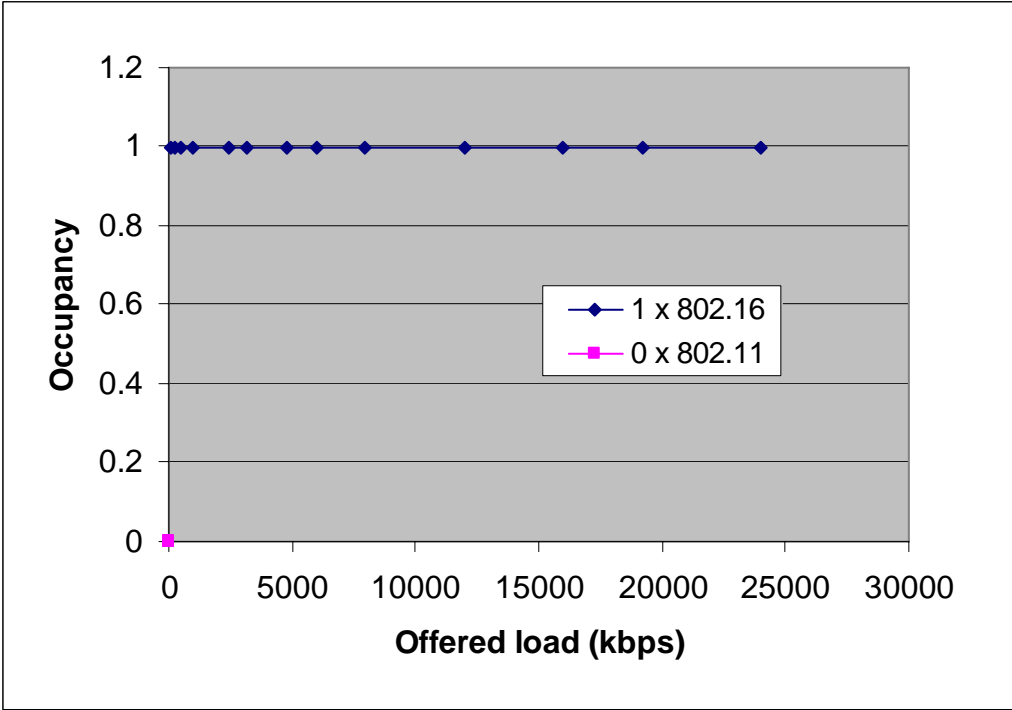


Figure 2 **Scenario A** – Occupancy and FER against offered load.

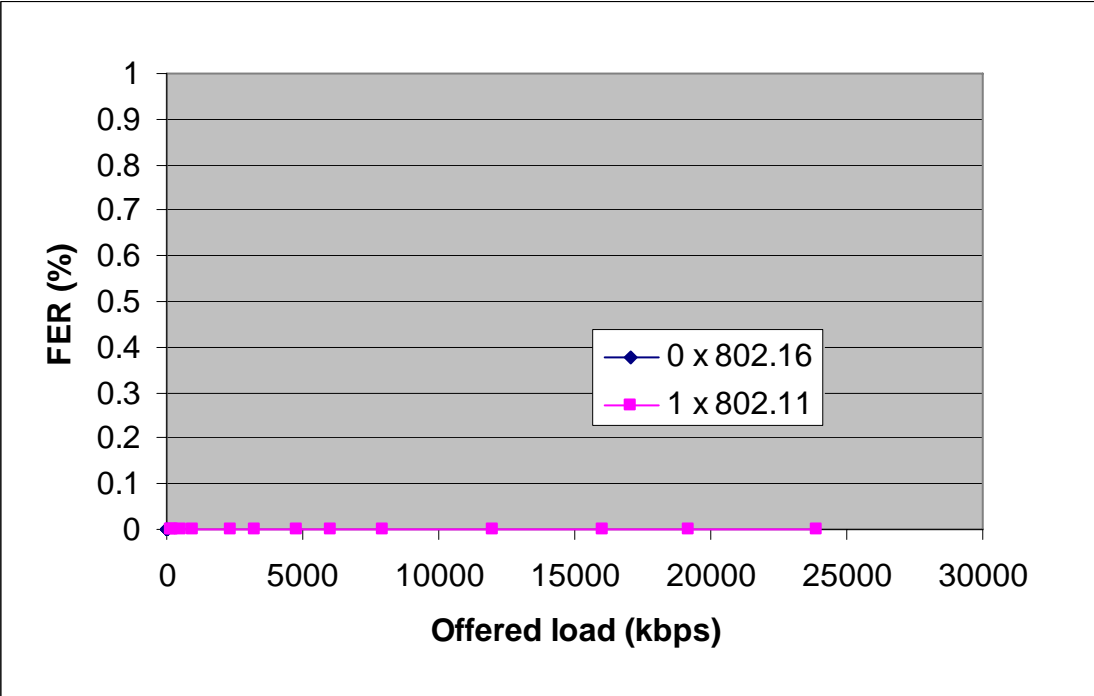
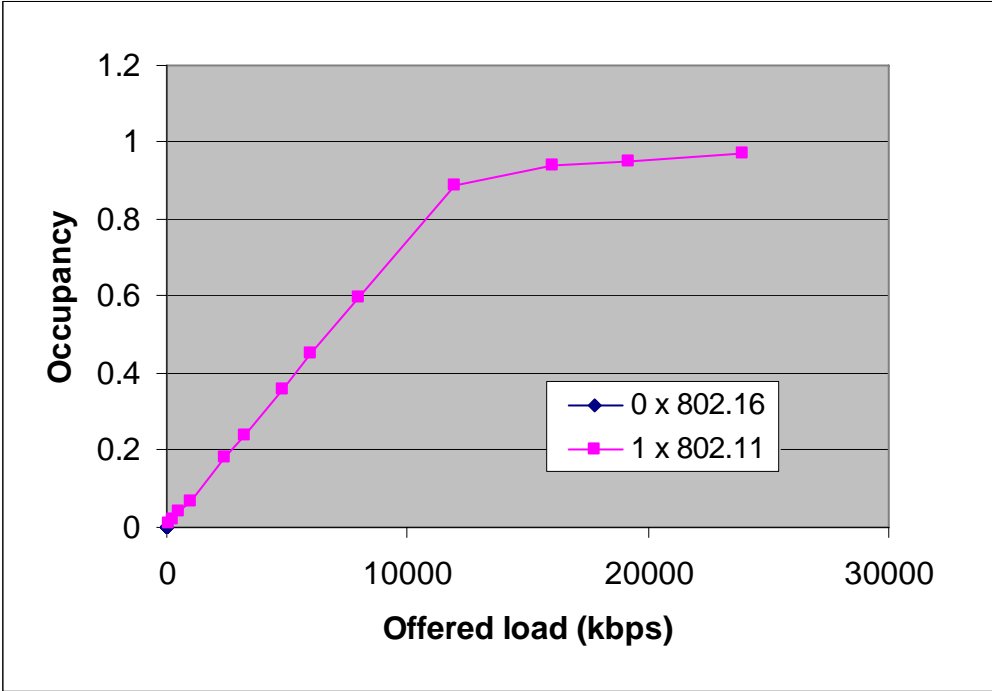


Figure 3 **Scenario B** – Occupancy and FER against offered load.

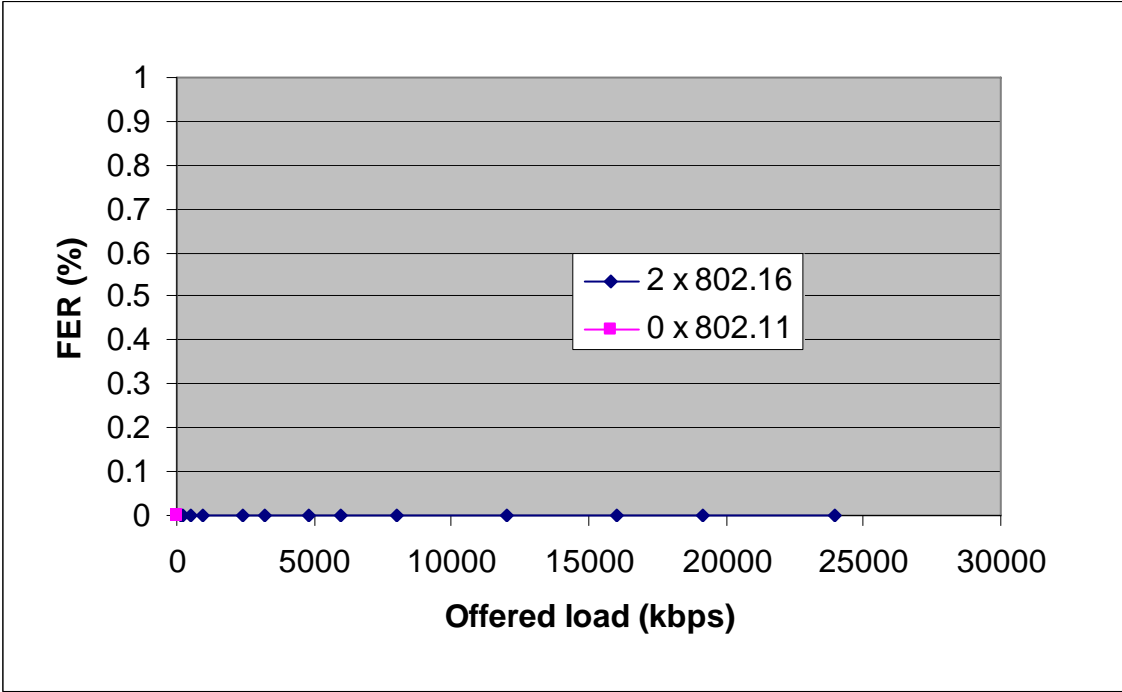
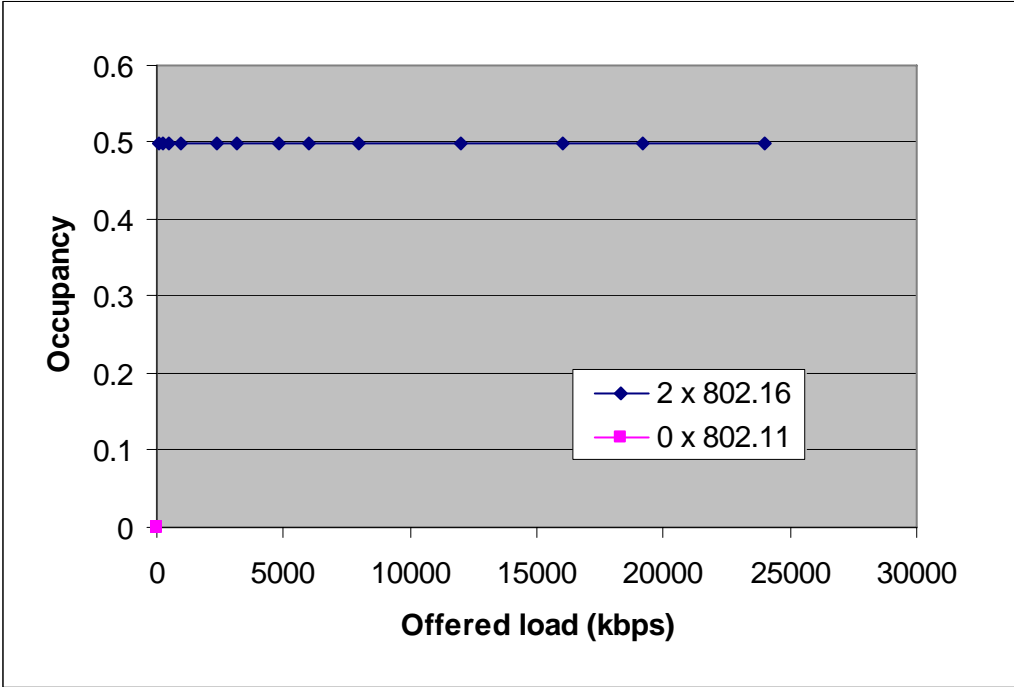


Figure 4 **Scenario C** – Occupancy and FER against offered load.

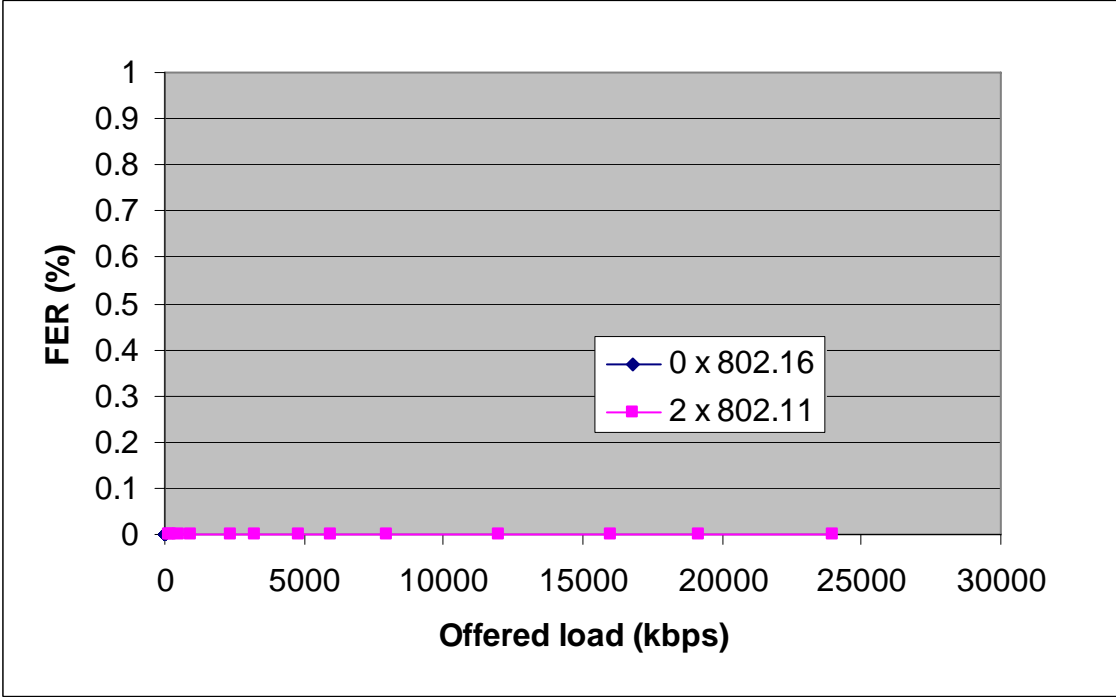
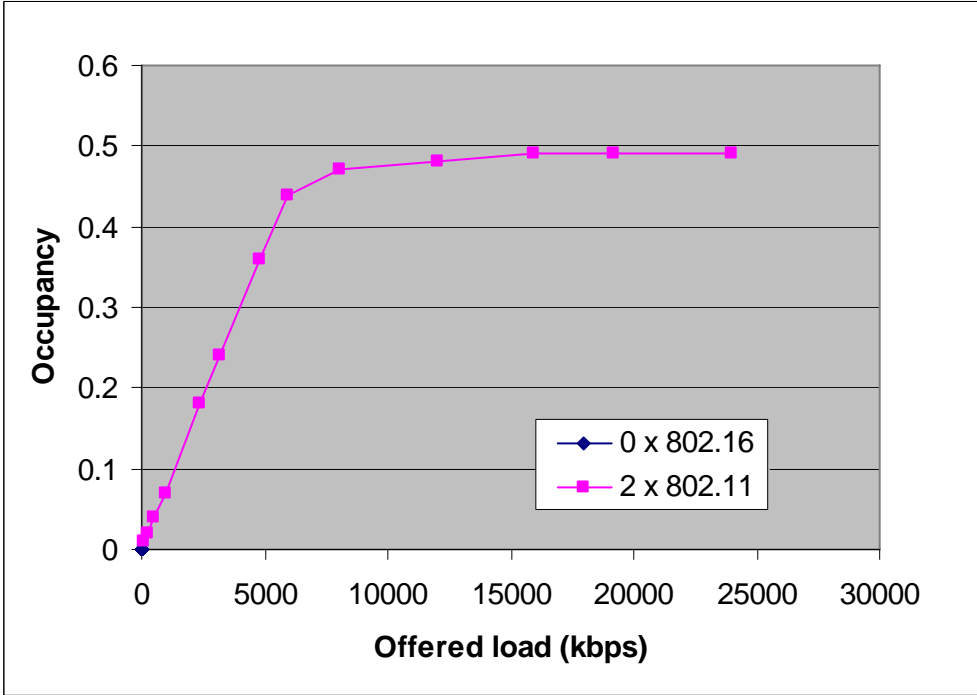


Figure 5 Scenario D – Occupancy and FER against offered load.



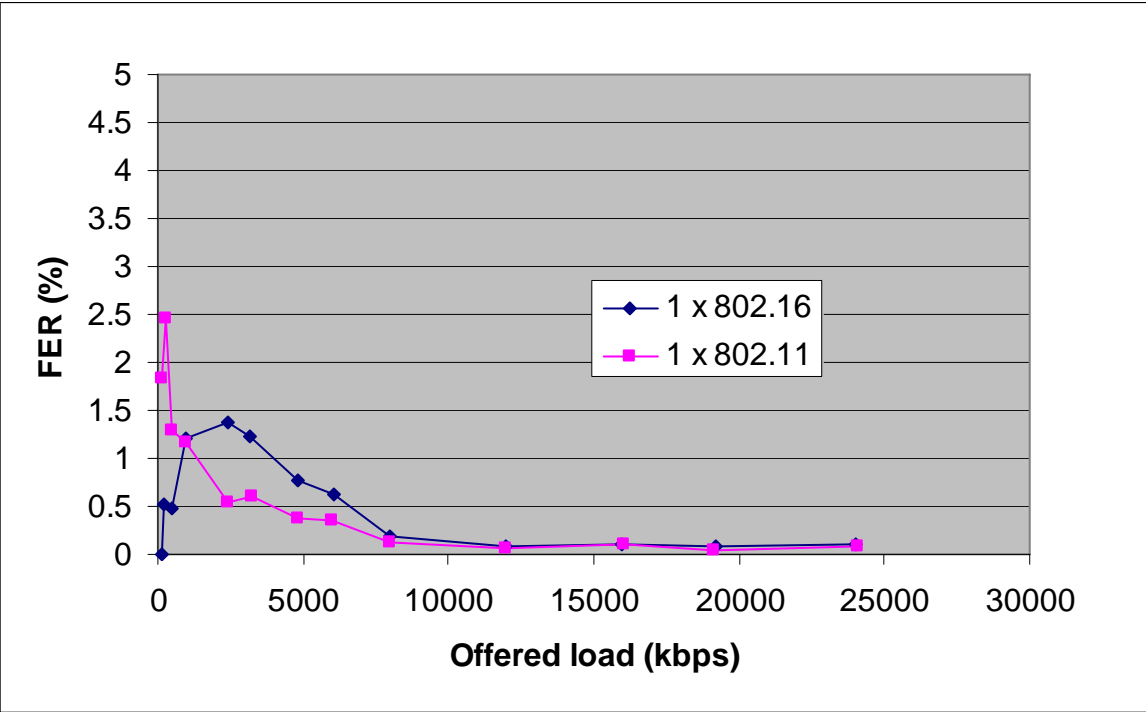
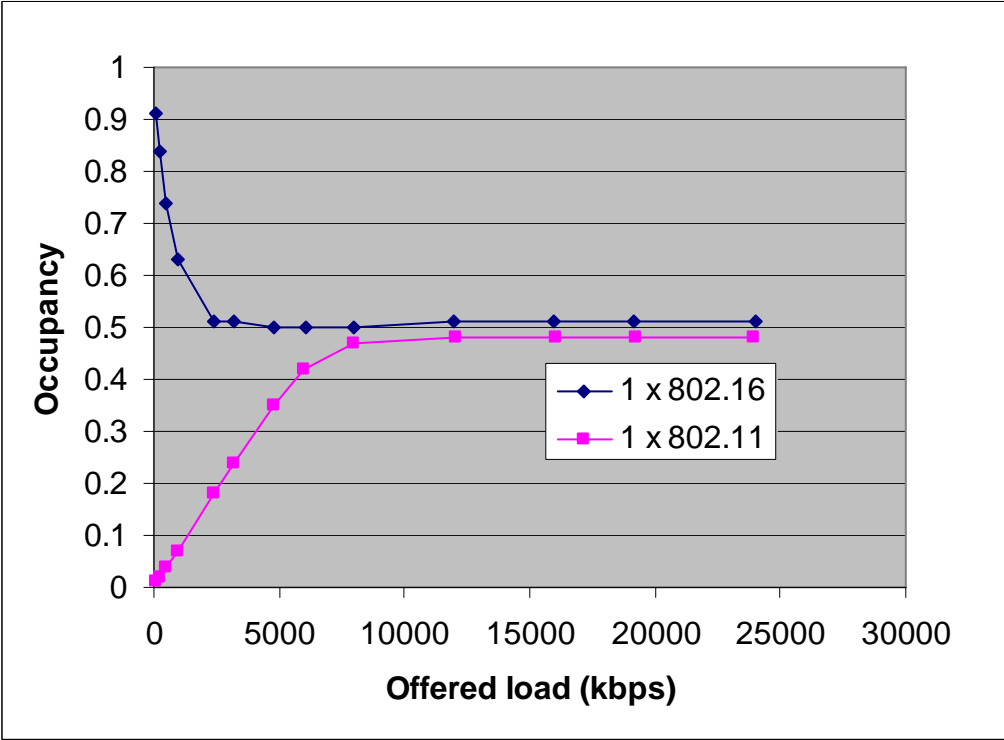


Figure 6 Scenario E – Occupancy and FER against offered load.

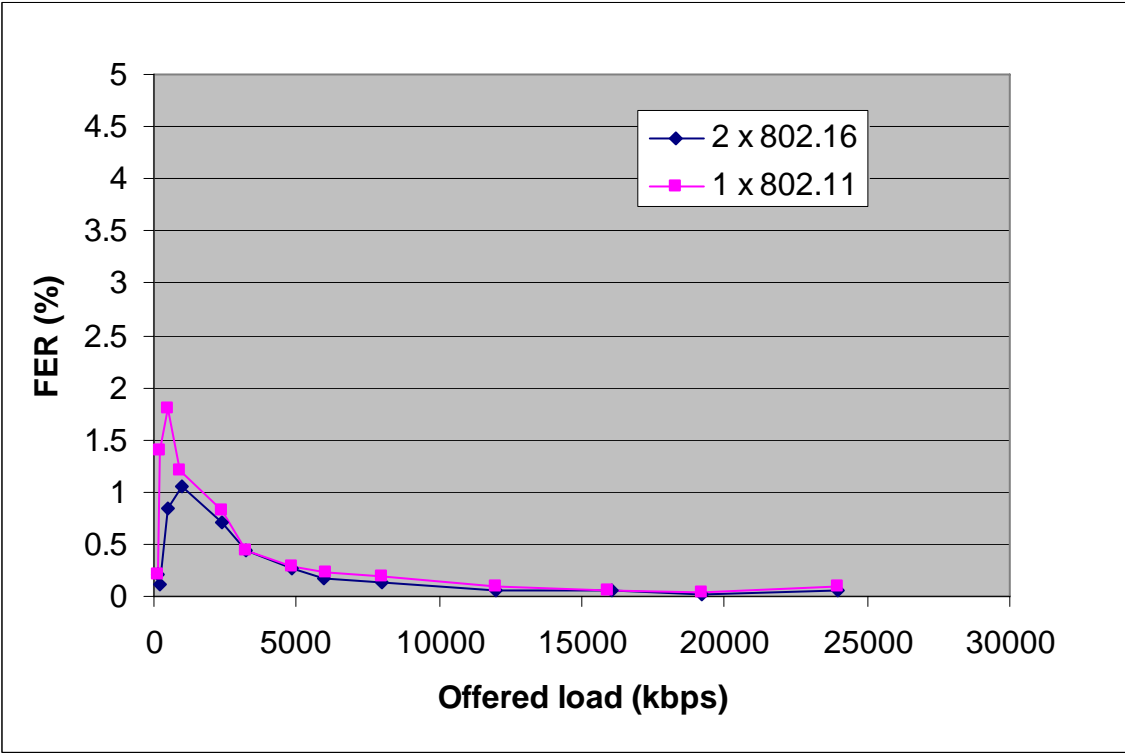
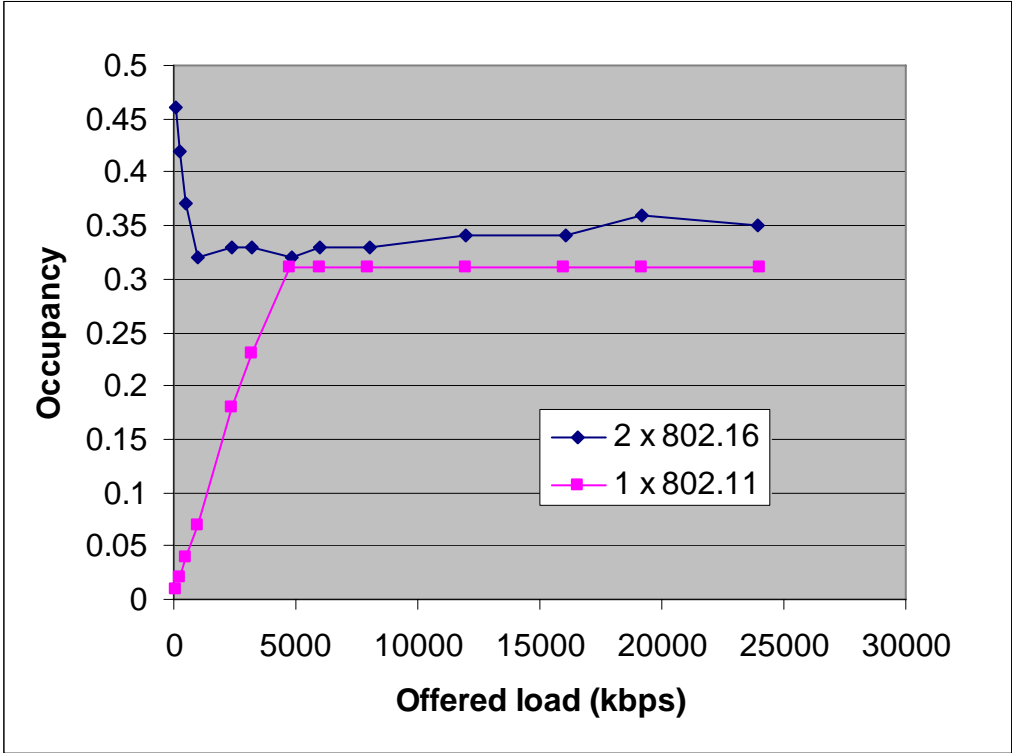


Figure 7 Scenario F – Occupancy and FER against offered load.

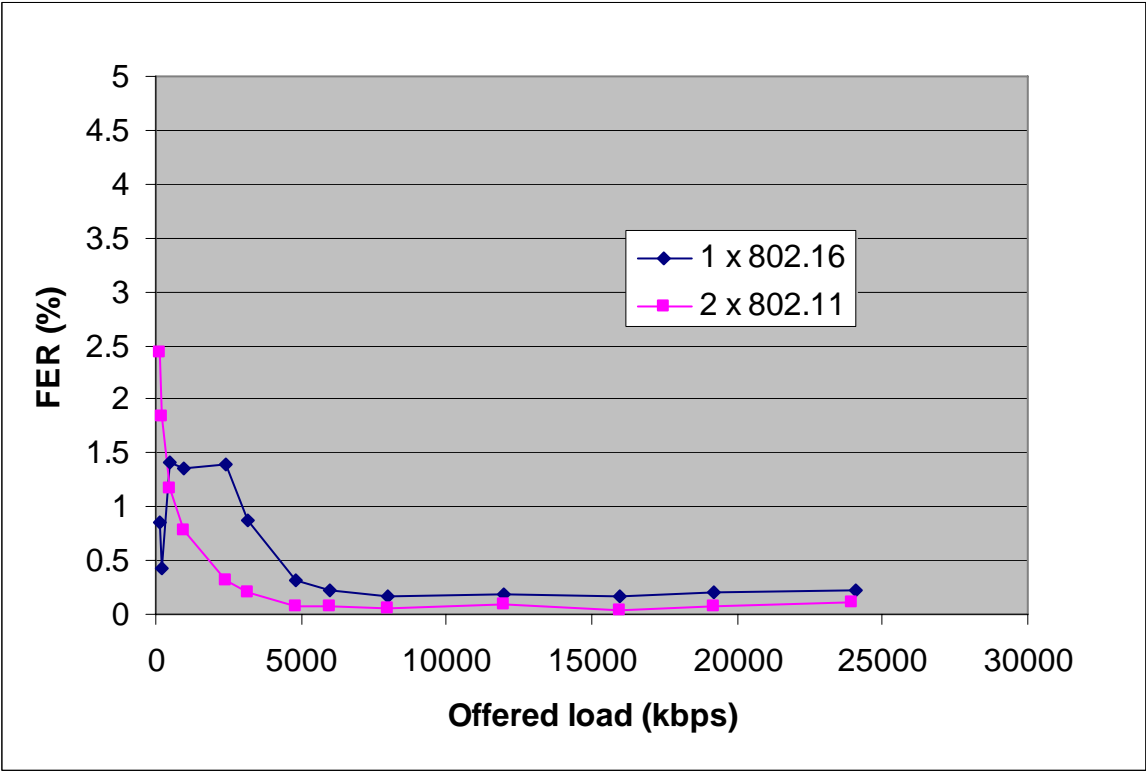
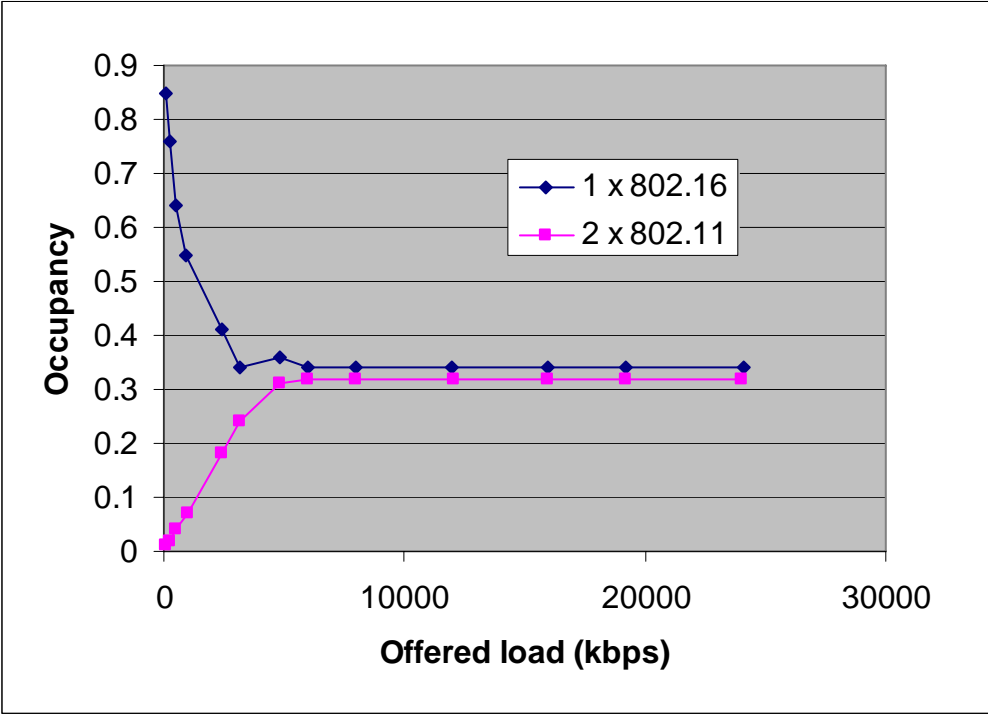


Figure 8 Scenario G – Occupancy and FER against offered load.

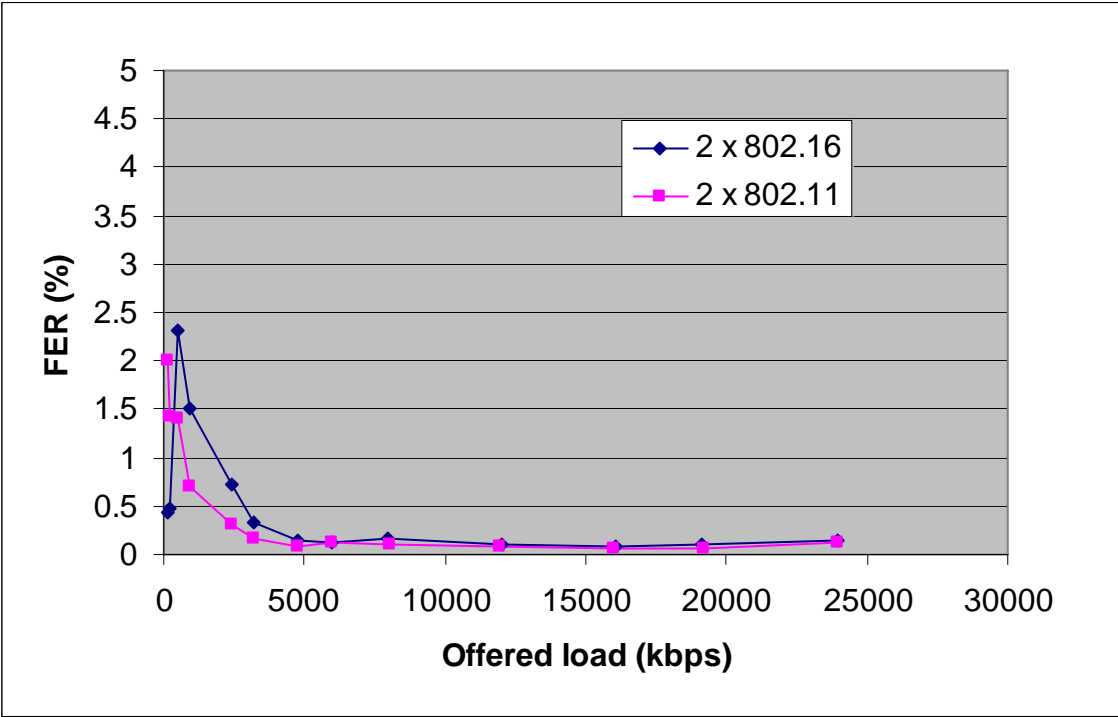
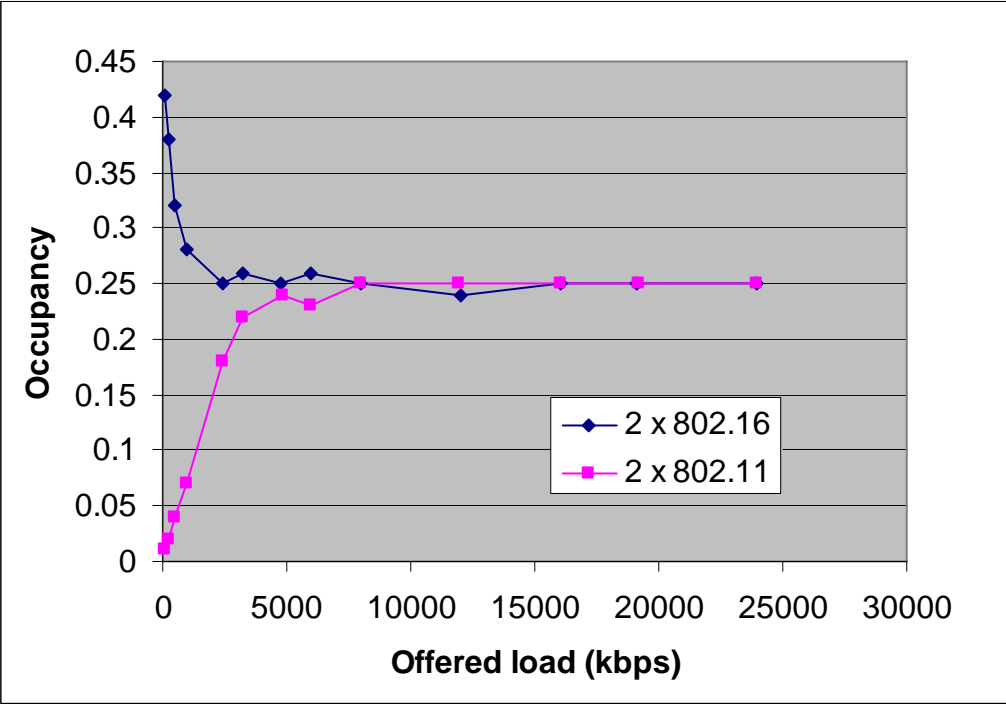


Figure 9 Scenario H – Occupancy and FER against offered load.

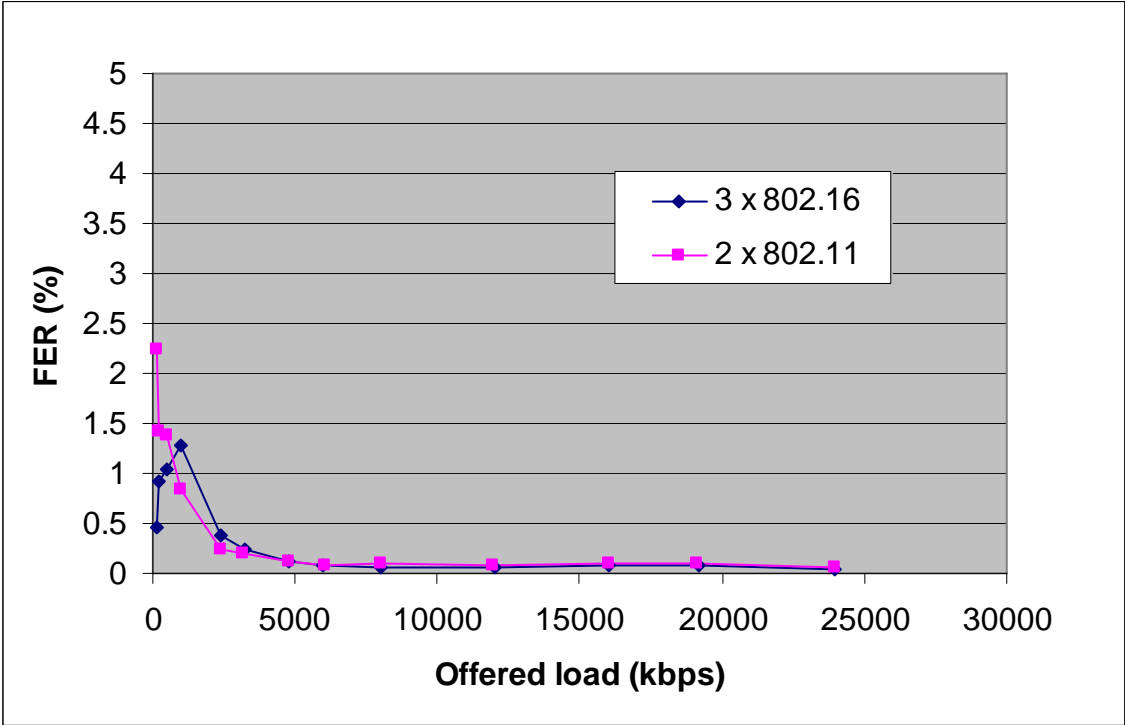
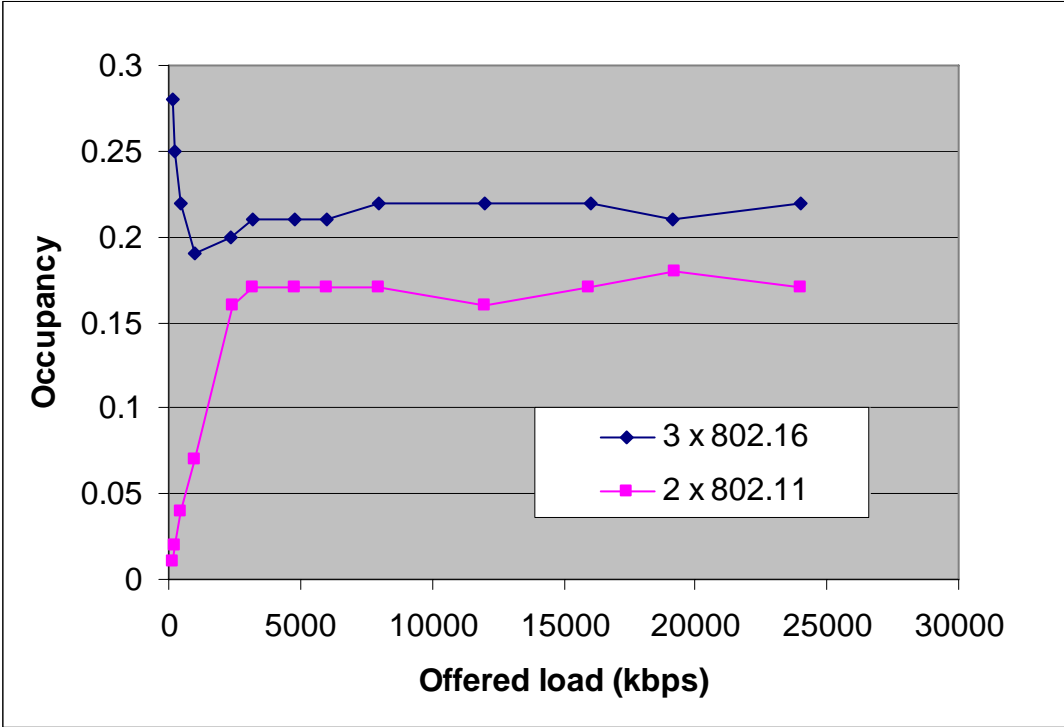


Figure 10 **Scenario I** – Occupancy and FER against offered load.

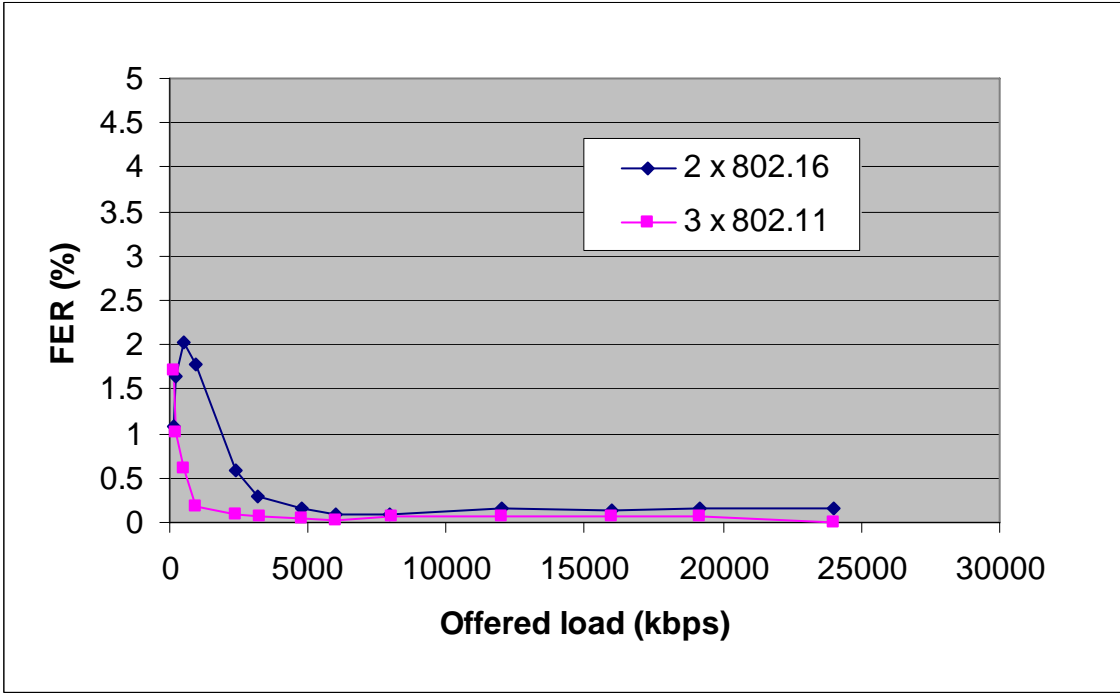
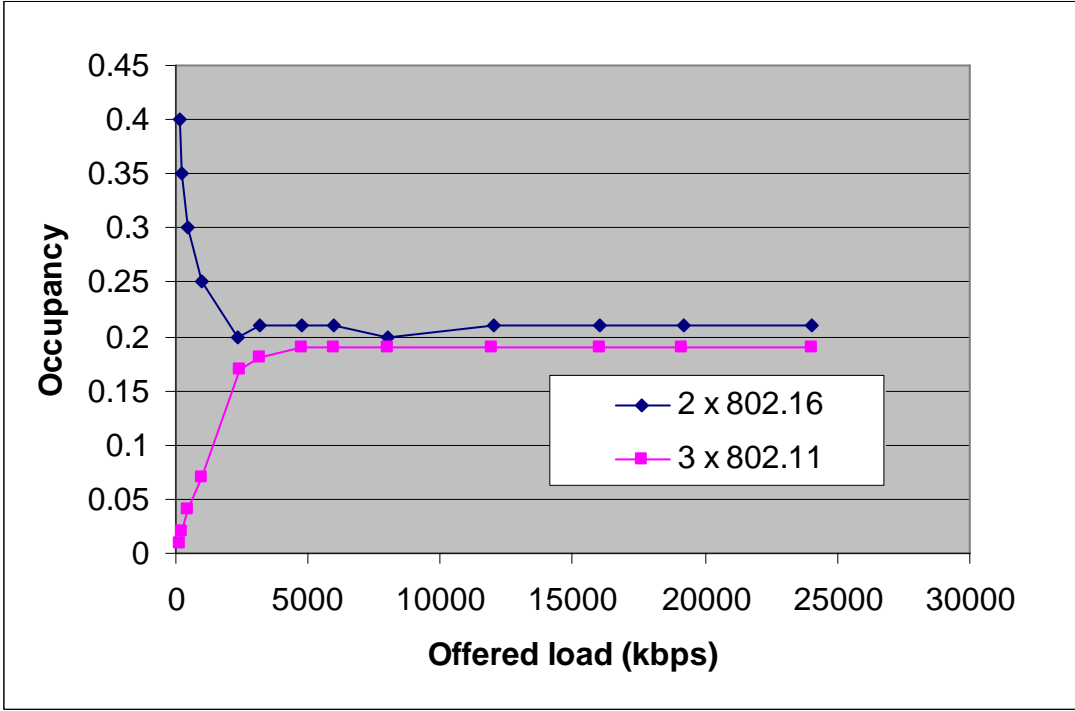


Figure 11 Scenario J – Occupancy and FER against offered load.

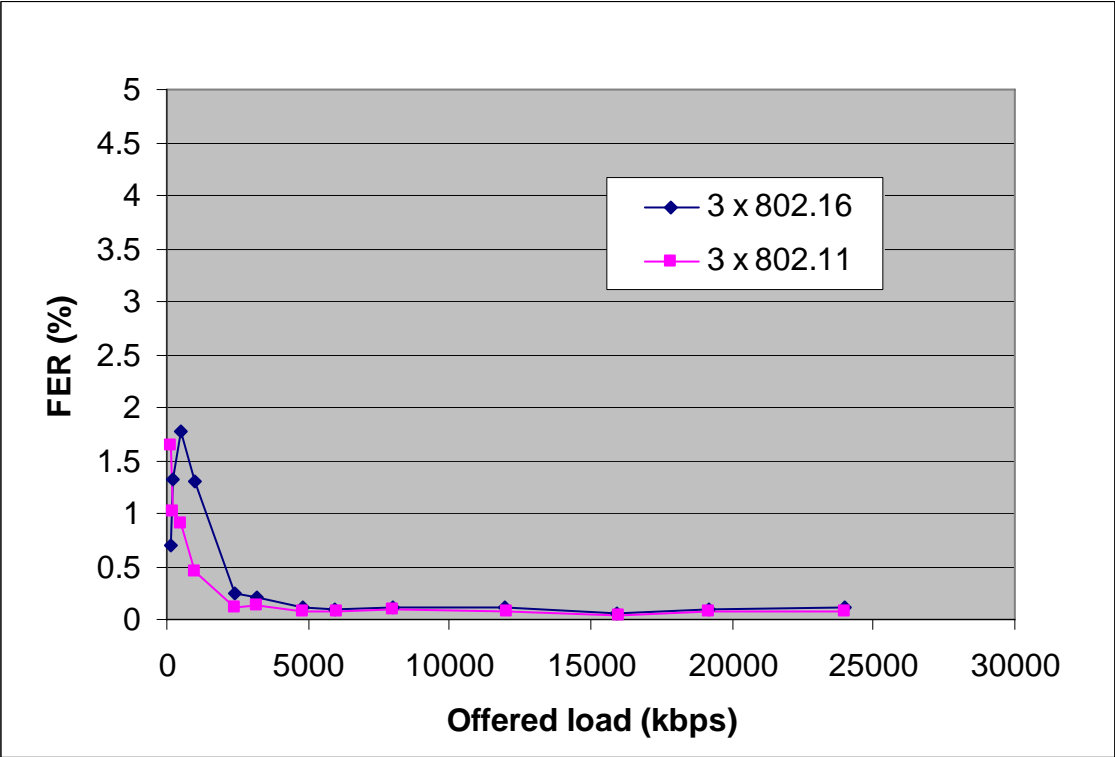
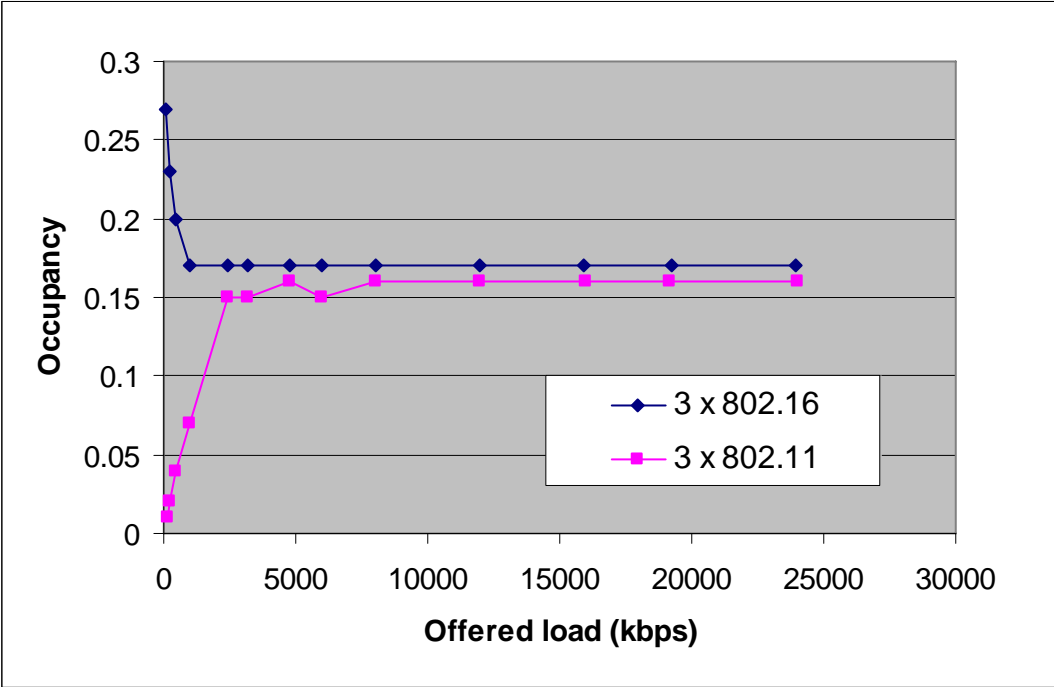


Figure 12 **Scenario K** – Occupancy and FER against offered load.

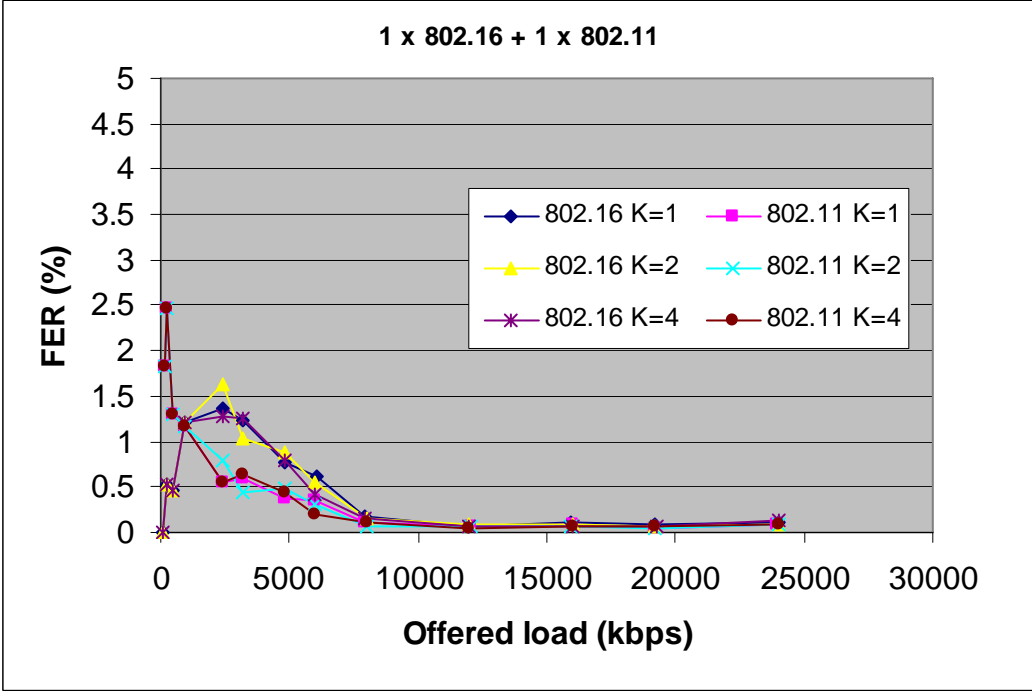
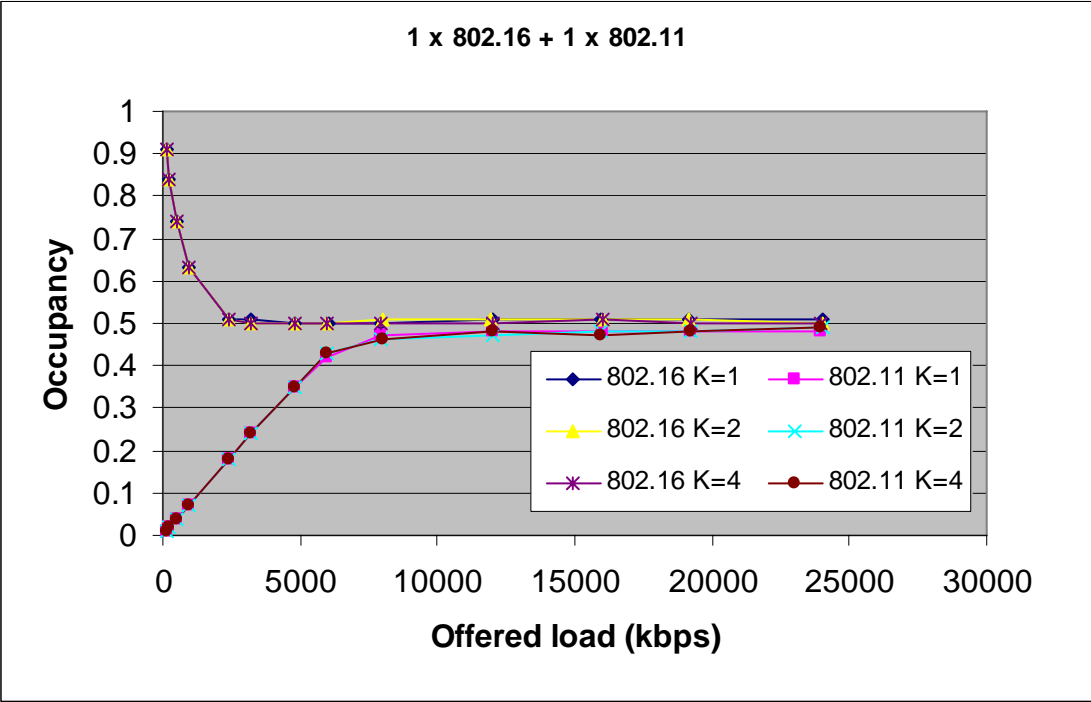


Figure 13 Scenario A, L, M – Occupancy and FER against offered load, K=1, 2, 4.



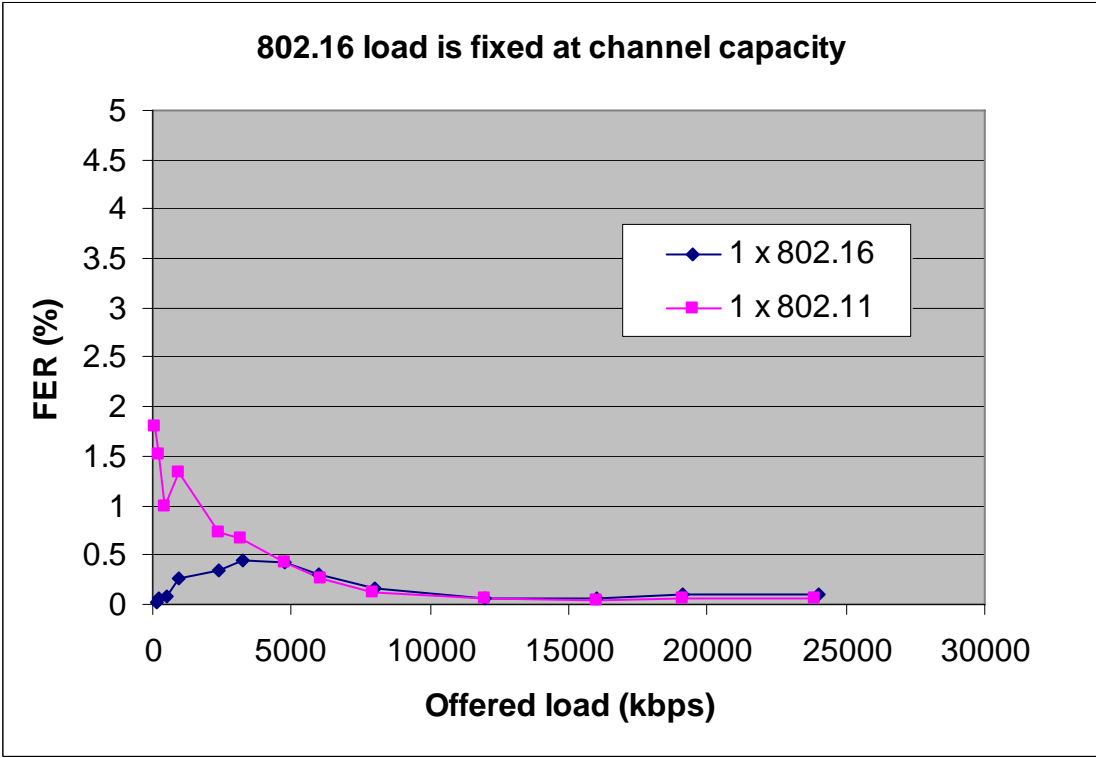
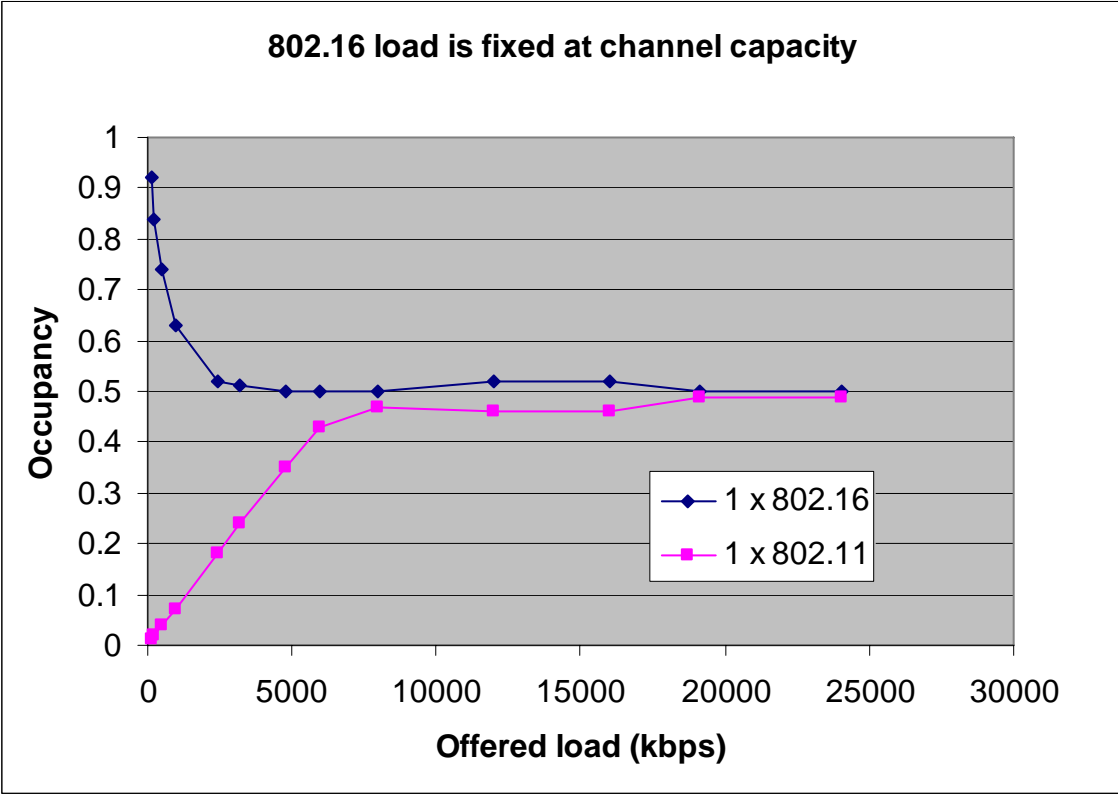


Figure 14 **Scenario N** – Occupancy and FER against offered load. 802.16 load fixed at channel capacity.

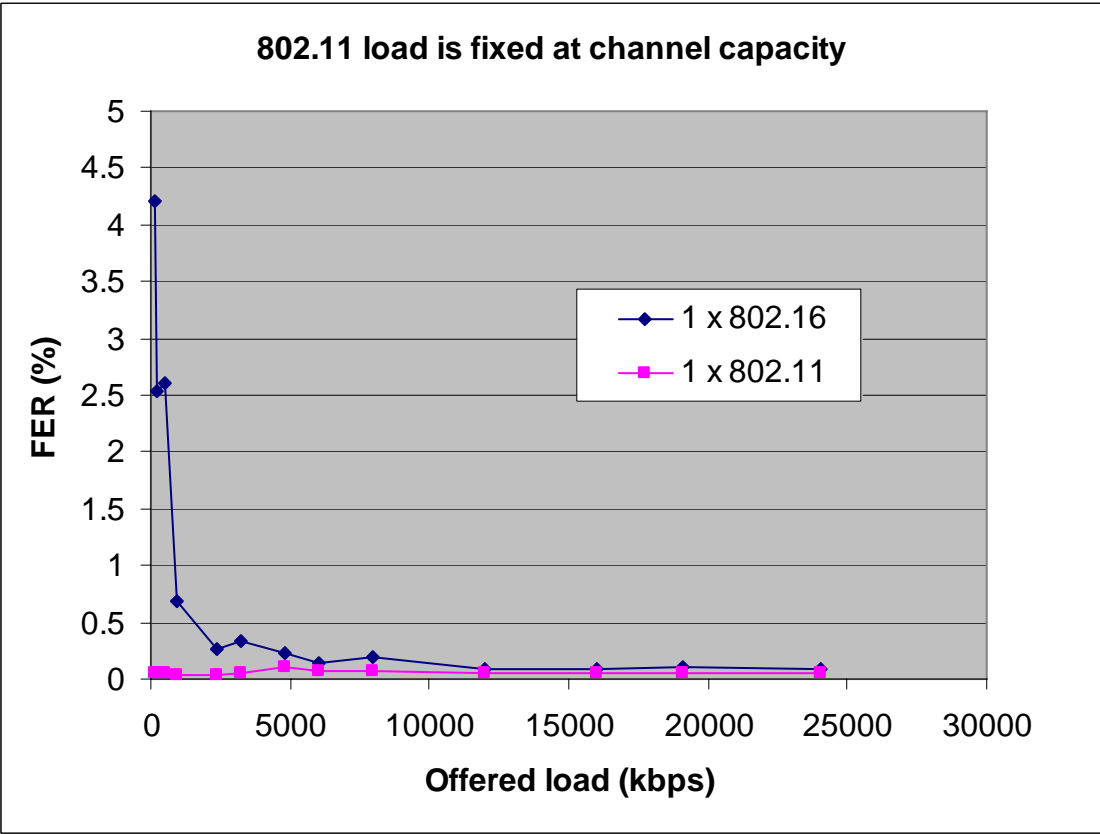
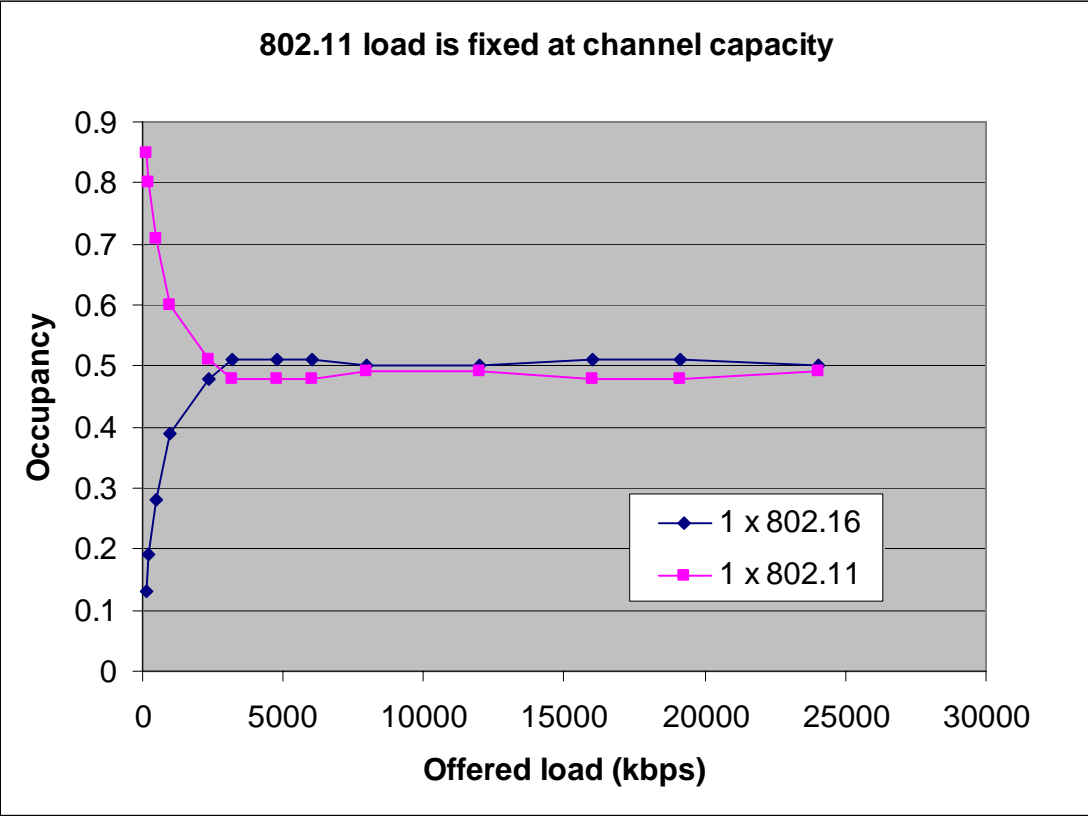


Figure 15 **Scenario O** – Occupancy and FER against offered load. 802.11 load fixed at channel

capacity

## Conclusions

The conclusions to be drawn from the simulation results presented are thus:

- Equitable system sharing is achieved with the cited enhancements to LBT.
- Sharing is achieved with a demonstrably low FER.
- For this specific simulation configuration the sensitivity of *channel occupancy* to  $K$  is low.
- Concerning scenarios N and O:
  - Scenario N shows that for the case where 802.16 has high loading then 802.16 demonstrates high occupancy for the case where 802.11 loading is low. As the 802.11 load increases then fair sharing is demonstrated.
  - Scenario O shows high occupancy of 802.11 where its loading is high, and where 802.16 loading is low. This is for the case where the loading scenario is reversed to that given in scenario N. Again this shows fair sharing for the case where high loading is apparent for both systems.

## Specific editing changes

None.

## References

- [1] IEEE P802.16h/D2c: *Air Interface for Fixed Broadband Wireless Access Systems Improved Coexistence Mechanisms for License-Exempt Operation*, Draft Standard.
- [2] Paul Piggin et al., *Enhancements to UCP LBT*, IEEE 802.16-07/078, September 2007.
- [3] Paul Piggin, *Parameters for simulation of Wireless Coexistence in the US 3.65GHz band*, IEEE 802.19-07/11r7, September 2007.