

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>MRS Paging Group Update</b>	
Date Submitted	<b>2007-01-08</b>	
Source(s)	Shashikant Maheshwari, Yousuf Saifullah, Haihong Zheng Nokia 6000 Connection Drive, Irving, TX	Voice: 972 839 1878 Fax: <a href="mailto:shashikant.maheshwari@nokia.com">shashikant.maheshwari@nokia.com</a> , <a href="mailto:Yousuf.saifullah@nokia.com">Yousuf.saifullah@nokia.com</a> , <a href="mailto:haihong.1.zheng@nokia.com">haihong.1.zheng@nokia.com</a>
Re:	This is in response to the call for proposal, 80216j-07_034.pdf, sent out by 802.16j TG.	
Abstract	This contribution proposes MRS Paging Group Update procedure that would support MS location update very efficiently.	
Purpose	Add proposed spec changes.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.	

# MRS Paging Group Update

*Shashikant Maheshwari, Yousuf Saifullah and Haihong Zheng*

*Nokia*

## Introduction

In IEEE802.16e-2005 Std, an MS in Idle mode perform a Location update procedure if any of the Location update condition is met. There are four different location update conditions defined in the IEEE Std 802.16e-2005: Paging Group Update, Timer Update, Power Down Update and MAC HASH Skip Threshold Update. In the multi-hop relay system, there could be one or more RS in between the MMR-BS and MS. In addition, RS could be fixed, Nomadic and Mobile. Location update procedure needs to consider the involvement of RS in the procedure.

When Mobile RS moves along with its sub-ordinate MSs from one paging group area to another paging group area, all the sub-ordinate MS in idle mode detects the change in paging group and performs location update procedure almost simultaneously. This would increase the signaling load, congestion and contention on the access link and relay link. Resulting in failure of ranging procedures, and require sudden demand of extra bandwidth on the target MMR-BS. In multi-hop relay system, modification will be required to efficiently support MS location update via Mobile RS. This contribution proposes the new procedure for **Mobile RS Paging Group update** which will efficiently support MS location update in multi-hop replay system without requiring changes to MS.. This behavior corresponds to the usage scenario where RS moves together with MS e.g. RS attached to Bus, ferry or train and MS's attached to Mobile RS.

This contribution also specifies the required changes in the IEEE802.16-2004/IEEE 802.16e-2005 specifications.

## Proposal

It is not expected that mobile RS will have an idle mode. Therefore there is no requirement for Mobile RS to support location update procedure. It is expected that there could be many sub-ordinate MS attached to MRS. When MRS moves from one PG area to another, it would be possible that many attached idle mode sub-ordinate MS would initiate location update almost at the same time. This will create significant traffic load almost at the same time. This section describes the new procedure called "Mobile RS paging Group Update" procedure that will support the MS location update signaling very efficiently.

This section describes the following

- Mobile RS paging group update procedure between MMR-BS and MRS
- Efficient Location update procedure for subordinate MS attached to MRS. m

### **Mobile RS paging group update**

MRS shall perform the paging group update procedure with MMR-BS when the MRS detects a change in paging group. MRS shall detect the change of paging group by monitoring the paging group identifier, PG\_ID, which is transmitted by the preferred MMR-BS in the DCD message or MOB\_PAG\_ADV broadcast message. If the PG\_ID detected does not match the Paging Group to which MRS belongs, the RS shall perform the



While above procedure between MRS and MMR-BS is ongoing, Depending upon the MRS capability, it will either keep modifying DCD and/or MOB\_PAG\_ADV messages by adding its own PG\_ID in the PG\_ID list or block the transmission of DCD and MOB\_PAG\_ADV message. When MRS receives RNG\_RSP, it will stop modifying or blocking these broadcast messages. Figure 2 describes the message interaction between MMR-BS, MRS and sub-ordinate MSs. Modifications are shown in **RED italic**.

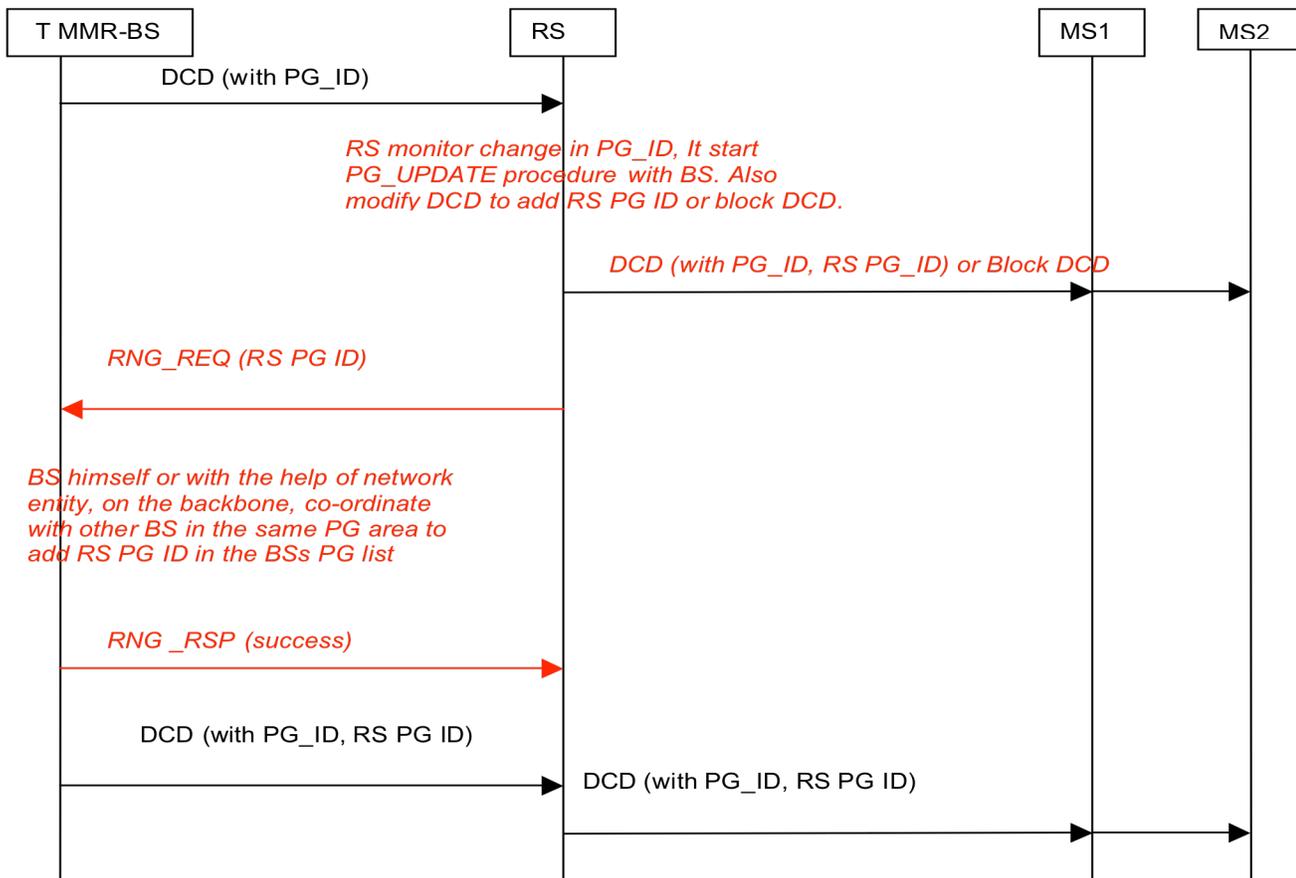


Figure 2: Message sequence for the proposed MRS Paging Group Update process

When MMR-BS or any other network entity add the RS PG\_ID in the PG\_ID list of the MMR-BS(s) in new Paging Group area, it also remove the RS PG\_ID from the PG list of MMR-BS(s) in the old Paging Group in order to avoid unnecessary transmission of RS PG\_ID from the MMR-BS's in old Paging Group area.

Granularity of initiating RS Paging Group Update Procedure can be configurable depending upon the signaling load, network policy etc. MRS can perform RS Paging Group Update procedure either when MRS crosses PG area boundary or when MRS crosses MMR-BS/RS coverage boundary.

## **Impact on Location update for subordinate MS**

When MS enters in to the MRS coverage, its PG\_ID will be different from MRS PG\_ID. When MRS crosses the PG Area boundary, it will perform the procedure as defined in section [Mobile RS paging group update]. However, MS whose PG\_ID is different from MRS PG\_ID will still initiate location update procedure. This contribution proposes that when sub-ordinate MS perform the location update procedure as defined in IEEE 802.16e Std with MMR-BS via MRS, BS or other network entity e.g. PC provide new PG\_ID to sub-ordinate MS which is same as RS\_PG\_ID in RNG\_RSP (location update response).

Now onward, as long as sub-ordinate MS's moving along with MRS, only MRS will perform the Paging Group update procedure as defined in section [Mobile RS paging group update]. MS will not be required to perform location update procedure when crossing the Paging Group area boundary. This proposed scheme requires only MRS paging group update procedure and no sub-ordinate MS location update procedure. This MRS Paging Group Update procedure will implicitly take care of sub-ordinate MS location update through MRS. This scheme efficiently supports MS location update and significantly reduces the signaling load, congestion and contention in the access and relay link.

## **Advantages**

The proposed MRS Paging Group Update procedure has the following advantages:

- Spectrally efficient signaling by minimizing the number of location update attempt.
- Congestion is reduced and distributed on the multiple BS-RS and RS-MS link.
- Reduces the overall latency for MS location update into the network via RS because of low congestion.
- Probability of losing paging messages for MS during transition period is lower.
- Required very minimum changes on the air interface (one TLV in both RNG\_REQ and RNG\_RSP)

## **Specs changes for MRS Paging Update Procedure**

*Insert following statement at the end of the paragraph 3, which is located just above the figure 130i.*

FRS and NRS may have same or different Paging Groups compared to controlling MMR-BS. MRS shall be assigned one or more Paging Groups, which shall be different from MMR-BS.

*Insert following sections/subsection in new sub clause in 6.3.24 MS Idle Mode (Optional) section*

### **6.3.24.10 MRS Paging Group Update**

This process is only applicable to MRS. In principle, triggers and process for MRS Paging Group Update is similar to MS location update. However, MS location update is performed in idle mode where as MRS does not have idle mode. MRS shall perform the paging group update procedure with MMR-BS when the MRS detects a

change in paging group. MRS shall detect the change of paging group by monitoring the paging group identifier, PG\_ID, which is transmitted by the preferred BS in the DCD message or MOB\_PAG\_ADV broadcast message. If the PG\_ID detected does not match the Paging Group to which MRS belongs, the RS shall perform the Paging Group update process with MMR-BS.

#### **6.3.24.10.1 Paging Group Update process**

If MRS determines to update its location, depending on the security association the MRS shares with the target MMR-BS, the MRS shall use one of the two processes: Secure MRS Paging Group Update Process or Unsecured MRS Paging Group Update Process.

##### **6.3.24.10.1.1 Secure Paging Group Update process**

If the MRS shares a valid security context with the target BS such that the MRS may include a valid HMAC/CMAC Tuple in the RNG-REQ, then the MRS shall conduct initial ranging with the target BS by sending a RNG-REQ including Ranging Purpose Indication TLV with Bit #2 set to 1, Paging Group Update Request and RS Paging Group ID TLVs and HMAC/CMAC Tuple. If the target BS evaluates the HMAC/CMAC Tuple as valid and can supply a corresponding authenticating HMAC/CMAC Tuple, and wants to add RS PG\_ID to its PG\_ID list based on the policy out of the scope of standard, target BS may exchange backbone messages with the other BSs in its PG to request the addition of RS PG\_ID to their PG\_ID list. Upon successful response from all of the BSs, the target BS shall reply with the RNG-RSP including the Paging Group Update Response TLV and HMAC/CMAC Tuple completing the Paging Group Update process. If the target BS responds with a successful Paging Group Update Response=0x01, Success of Paging Group Update, the target BS shall notify the Paging Controller via the backbone of the MRS new location information, and the Paging Controller may send a backbone message to inform the BSs to which the MRS was earlier attached that the MRS has transitioned to a different Paging Group. If the target BS evaluates the HMAC/CMAC Tuple as invalid, cannot supply a corresponding authenticating HMAC/CMAC Tuple, or otherwise elects to direct the MRS to use Unsecured Paging Group Update, then the target BS shall instruct the MRS to continue network re-entry using the Unsecured Paging Group Update process by inclusion of Paging Group Update Response TLV in RNG-RSP with a value of 0x00= Failure of Paging Group Update.

##### **6.3.24.10.2 Unsecured Paging Group Update process**

For an MRS and target BS that do not share current, valid security context, they shall process Paging Group Update using the Network Re-Entry.

#### **6.3.24.11 Network Re-Entry for MRS Paging Group Update**

For the Network Re-Entry, the MRS shall initiate network re-entry with the target BS by sending a RNG-REQ including Ranging Purpose Indication TLV with Bit #2 set to 1, Paging Group Update Request and RS Paging Group ID TLVs

If the MRS shares a valid security context with the target BS such that the MRS may include a valid HMAC/CMAC Tuple in the RNG-REQ, then the MRS shall conduct initial ranging with the target BS by sending a RNG-REQ including HMAC/CMAC Tuple.

If MRS RNG-REQ includes a Ranging Purpose Indication TLV with Bit #2 set to 1 and Paging Group ID TLVs, and target BS had not previously received MRS information over the backbone, then target BS may make an MRS information request to Paging Controller over the backbone network and Paging Controller may respond. Regardless of having received MRS information from Paging Controller, target BS may request MRS

information from another network management entity via the backbone network.

Network re-entry proceeds per 6.3.9.5 except as may be shortened by target BS possession of MRS information obtained from Paging Controller or other network entity over the backbone network. Rest of the network entry procedure for MRS is similar to MS as defined in section 6.3.24.9.

#### **6.3.2.3.5 Ranging request (RNG-REQ) message**

*Insert following text at the end of this section*

The following parameter shall be included in the RNG-REQ message when the RS is attempting to perform Paging Group Update:

##### **RS MAC Address**

RS MAC Address shall be included

##### **Ranging Purpose Indication**

Presence of item in message indicates RS action as follows:

If Bit #2 is set to 1, in combination with RS Paging Group ID indicates the RS is currently attempting to Paging Group Update process

##### **Paging Group ID (16 bit)**

One or more logical affiliation grouping of MRS (see 6.3.2.3.56)

The following parameter may be included in the RNG-REQ message when the RS is attempting to perform Paging Group Update and the RS has a valid HMAC/CMAC Tuple necessary to expedite security authentication.

##### **HMAC/CMAC Tuple (see 11.1.2)**

The HMAC/CMAC Tuple shall be the last attribute in the message.

#### **6.3.2.3.5 Ranging Response (RNG-RSP) message**

*Insert following text at the end this section*

When a MMR-BS sends RNG-RSP message in response to a RNG-REQ message containing MRS Paging Group ID, the MMR-BS shall include the following TLV parameter in the RNG-RSP message:

##### **Paging Group Update Response**

Response to Paging Group Update Request:

0b00=Failure of Paging Group Update. The MRS shall perform Network Re-entry

0b01=Success of Paging Group Update

0b10, 0b11: Reserved

**11.5 RNG-REQ message encodings**

*Modify/add the following rows into Table 364:*

Table 364—RNG-REQ message encodings

Ranging Purpose Indication	6	1	Bit #0: HO indication (when this bit is set to 1 in combination with other included information elements indicates the MS is currently attempting to HO or Network Re-entry from Idle Mode to the BS) Bit #1: Location Update Request (when this bit is set to 1, it indicates MS action of Idle Mode Location Update Process) Bit #2: MRS Location Update Request Bits 3-7: Reserved
Paging Group ID	35	2	MRS Paging Group ID.

**6.3.24.8.2 Location Update Process**

*Insert following text after 1<sup>st</sup> paragraph*

When MS initiate location update process via Mobile RS, MR-BS may allocate PG ID to MS same as MRS.