

IEEE P 802.20™/PD<insert PD Number>/V<7>

IEEE C802.20-03/81

Date: <August 28th 2003>

Formatted: English (U.S.)

Deleted: insert version number

Deleted: June 04.2003

Draft 802.20 Permanent Document

<802.20 Requirements Document >

This document is a Draft Permanent Document of IEEE Working Group 802.20. Permanent Documents (PD) are used in facilitating the work of the WG and contain information that provides guidance for the development of 802.20 standards. This document is work in progress and is subject to change.

Contents

1 Overview (Closure Proposed).....5

1.1 Scope (Closure Proposed).....5

1.2 Purpose (Closure Proposed).....5

1.3 PAR Summary (Closure Proposed).....5

2 Overview of Services and Applications (Closure Proposed).....7

2.1 Voice Services (Closure Proposed).....8

3 System Reference Architecture (open).....8

3.1 System Architecture (open).....8

3.1.1 MBWA System Reference Architecture (open).....8

MBWA-Specific Reference Model.....9

3.1.2 Layer 1 to Layer 2 Inter-working (Closure Proposed).....10

3.2 Definition of Interfaces (Closure Proposed).....10

4 Functional and Performance Requirements (open).....11

4.1 System (open).....11

4.1.1 System Gain and Spectral Efficiency will be discussed time to be set“section to be provided by Arif Ansari, Reza Arefi, Jim Mollenauer, and Khurram Sheikh”. (open).....11

4.1.2 Spectral Efficiency (bps/Hz/sector) (open).....12

4.1.3 Frequency Reuse (open).....13

4.1.4 Channel Bandwidths (open).....13

4.1.5 Duplexing (open).....14

4.1.6 Mobility (Closure Proposed).....14

4.1.7 Aggregate Data Rates – Downlink & Uplink (open).....14

4.1.7.1 User Data Rates -- Downlink & Uplink (Closure Proposed).....15

4.1.8 Number of Simultaneous Sessions (open).....16

4.1.9 Latency (open).....16

4.1.10 Packet Error Rate (open).....17

4.1.11 Frame Error Rate.....18

Deleted: 1 . Overview . 5¶

1.1 . Scope . 5¶

1.2 . Purpose . 5¶

1.3 . PAR Summary . 5¶

2 . Overview of Services and Applications 7¶

2.1 . Voice Services 8¶

3 . System Reference Architecture 8¶

3.1 . System Architecture 8¶

3.2 . Definition of Interfaces 9¶

4 . Functional and Performance Requirements 9¶

4.1 . System 9¶

4.1.1 . Link Budget . 9¶

4.1.2 . Spectral Efficiency (bps/Hz/sector) . 10¶

4.1.3 . Frequency Reuse . 10¶

4.1.4 . Channel Bandwidths 10¶

4.1.5 . Duplexing . 10¶

4.1.6 . Mobility . 10¶

4.1.7 . Aggregate Data Rates – Downlink & Uplink . 10¶

4.1.8 . Number of Simultaneous Sessions 11¶

4.1.9 . Latency 11¶

4.1.10 . Packet Error Rate . 11¶

4.1.11 . Use of Multi Antenna Capabilities . 11¶

4.1.12 . Network availability 12¶

4.1.13 . QOS . 12¶

4.1.14 . Security 12¶

4.1.15 . Handoff Support . 13¶

4.2 . PHY/RF . 14¶

4.2.1 . Receiver sensitivity 14¶

4.2.2 . Link Adaptation and Power Control . 14¶

4.2.3 . Max tolerable delay spread Performance under mobility 14¶

4.2.4 . Duplexing – FDD & TDD 14¶

4.3 . Spectral Requirements 14¶

4.3.1 . Adaptive Modulation and Coding . 14¶

4.3.2 . Layer 1 to Layer 2 Inter-working . 14¶

4.4 . Layer 2 MAC (Media Access Control) . 15¶

4.4.1 . Quality of Service and the MAC . 15¶

4.5 . Layer 3+ Support . 22¶

4.5.1 . OA&M Support . 22¶

4.5.2 . Scheduler 23¶

4.5.3 . MAC Complexity Measures . 23¶

4.6 . User State Transitions . 23¶

4.7 . Resource Allocation 23¶

5 . References 23¶

Appendix A . Definition of Terms and Concepts 24¶

Appendix B . Unresolved issues 27¶

5.1.1 . MBWA-Specific Reference Model . 29¶

- 4.1.12 Supoport for Multi Antenna Capabilities (Closure Proposed).....20
- 4.1.13 Antenna Diversity (open)20
- 4.1.14 Best Server Selection (open).....23
- 4.1.15 QoS (open)23
- 4.1.16 Security (Closure Proposed).....29
 - 4.1.16.1 Access Control (Closure Proposed).....29
 - 4.1.16.2 Privacy Methods (Closure Proposed).....29
 - 4.1.16.3 User Privacy (Closure Proposed)30
 - 4.1.16.4 Denial of Service Attacks (Closure Proposed).....30
 - 4.1.16.5 Security Algorithm (Closure Proposed)30
- 4.2 PHY/RF (open).....30
 - 4.2.1 Receiver sensitivity (Closure Proposed).....30
 - 4.2.2 Link Adaptation and Power Control (open)30
 - 4.2.3 Performance Under Mobility & Delay Spread (open).....31
 - 4.2.4 Duplexing – FDD & TDD (Closure Proposed).....31
- 4.3 Spectral Requirements (Closure Proposed).....32
- 4.4 Layer 2 MAC (Media Access Control) (open).....32
 - 4.4.1 Quality of Service and the MAC (open).....32
 - 4.4.1.1 Cos/QoS Matched-Criteria (open).....35
 - 4.4.1.1.1 Protocol Field Mapping (open).....35
 - 4.4.1.1.2 Hardware Mapping (open).....36
 - 4.4.1.1.3 Additional Criteria (open).....36
 - 4.4.1.2 CoS/QoS Enforcement (open).....36
 - 4.4.1.2.1 Aggregate Bandwidth Partitioning (open).....37
 - 4.4.1.2.2 Interface Binding (open).....37
 - 4.4.1.2.3 Packet Mangling (open).....37
 - 4.4.1.2.4 Resource Scheduling (open).....37
 - 4.4.1.2.5 Rate-limiting (open).....37

- [4.4.1.3 ARO/Retransmission \(open\).....37](#)
- [4.4.1.3.1 End to End Latency \(open\).....38](#)
 - [4.4.1.3.2 End to End Latency Variation \(open\).....38](#)
- [4.4.1.4 Protocol Support \(open\).....38](#)
- [4.4.1.5 Addressing \(open\).....38](#)
- [4.4.1.6 Support/Optimization for TCP/IP \(open\).....38](#)
- [4.5 Layer 3+ Support \(open\).....39](#)
- [4.5.1 Handoff Support \(Closure Proposed\).....39](#)
 - [4.5.1.1 Make before Break Handoff \(Closure Proposed\).....39](#)
 - [4.5.1.2 Break before MakeHandoff \(Closure Proposed\).....39](#)
 - [4.5.1.3 Make before Break Handoff Between Similar MBWA Systems \(Closure Proposed\).....39](#)
 - [4.5.1.4 Make before Break Handoff Between Frequencies \(Closure Proposed\).....39](#)
 - [4.5.1.5 IP-Level Handoff \(open\).....39](#)
 - [4.5.2 802.1Q tagging \(open\).....39](#)
 - [4.5.3 CPE software upgrade “push” \(Closure Proposed\).....40](#)
 - [4.5.4 OA&M Support \(Closure Proposed\).....41](#)
 - [4.5.5 MAC Complexity Measures \(open\).....42](#)
 - [4.5.6 Call Blocking.....42](#)
 - [4.5.7 This section was moved to layer 3 + Support based on the discussion at the Plenary in July.43](#)
 - [4.5.8 4.5.6 Call Blocking..... **Error! Bookmark not defined.**](#)
- [4.6 Scheduler \(Closure Proposed\).....43](#)
- [4.7 User State Transitions \(Closure Proposed\).....43](#)
- [4.8 Resource Allocation \(Closure Proposed\).....44](#)
- [5 References \(open\).....44](#)
- [Appendix A Definition of Terms and Concepts.....45](#)
- [Appendix B Unresolved issues.....48](#)
- [5.1.1 MBWA-Specific Reference Model \(open\).....50](#)

Deleted: ¶
¶
¶

1 **1 Overview (Closure Proposed)**

2 **1.1 Scope (Closure Proposed)**

3 This document defines system requirement for the IEEE 802.20 standard development
4 project. These requirements are consistent with the PAR (IEEE SA Project Authorization
5 Request) document (see section 1.3 below) and shall constitute the top-level specification
6 for the 802.20 standard. For the purpose of this document, an “802.20 system” constitutes
7 an 802.20 MAC and PHY implementation in which at least one Mobile station
8 communicates with a base station via a radio air interface, and the interfaces to external
9 networks, for the purpose of transporting IP packets through the MAC and PHY protocol
10 layers.

11 Unresolved issues are found in Appendix B.

12 **1.2 Purpose (Closure Proposed)**

13 This document establishes the detailed requirements for the Mobile Broadband Wireless
14 Access (MBWA) systems. How the system works is left to the forthcoming 802.20 standard, which
15 will describe in detail the interfaces and procedures of the MAC and PHY protocols. <Reza Arefi 7/18/03>

16 **1.3 PAR Summary (Closure Proposed)**

17 The scope of the PAR (listed in Item 12) is as follows:

18

19 *“Specification of physical and medium access control layers of an air interface*
20 *for interoperable mobile broadband wireless access systems, operating in*
21 *licensed bands below 3.5 GHz, optimized for IP-data transport, with peak data*
22 *rates per user in excess of 1 Mbps. It supports various vehicular mobility classes*
23 *up to 250 Km/h in a MAN environment and targets spectral efficiencies, sustained*
24 *user data rates and numbers of active users that are all significantly higher than*
25 *achieved by existing mobile systems.”*

26

27 In addition, a table (provided in Item 18) lists “additional information on air interface
28 characteristics and performance targets that are expected to be achieved.”

29

<i>Characteristic</i>	<i>Target Value</i>
<i>Mobility</i>	<i>Vehicular mobility classes up to 250 km/hr (as defined in ITU-R M.1034-1)</i>


<i>Sustained spectral efficiency</i>	<i>> 1 b/s/Hz/cell</i>
<i>Peak user data rate (Downlink (DL))</i>	<i>> 1 Mbps*</i>
<i>Peak user data rate (Uplink (UL))</i>	<i>> 300 kbps*</i>
<i>Peak aggregate data rate per cell (DL)</i>	<i>> 4 Mbps*</i>
<i>Peak aggregate data rate per cell (UL)</i>	<i>> 800 kbps*</i>
<i>Airlink MAC frame RTT</i>	<i>< 10 ms</i>
<i>Bandwidth</i>	<i>e.g., 1.25 MHz, 5 MHz</i>
<i>Cell Sizes</i>	<i>Appropriate for ubiquitous metropolitan area networks and capable of reusing existing infrastructure.</i>
<i>Spectrum (Maximum operating frequency)</i>	<i>< 3.5 GHz</i>
<i>Spectrum (Frequency Arrangements)</i>	<i>Supports FDD (Frequency Division Duplexing) and TDD (Time Division Duplexing) frequency arrangements</i>
<i>Spectrum Allocations</i>	<i>Licensed spectrum allocated to the Mobile Service</i>
<i>Security Support</i>	<i>AES (Advanced Encryption Standard)</i>

1

2 * Targets for 1.25 MHz channel bandwidth. This represents 2 x 1.25 MHz (paired)
 3 channels for FDD and a 2.5 MHz (unpaired) channel for TDD. For other bandwidths,
 4 the data rates may change.

1 2 Overview of Services and Applications (Closure Proposed)

2

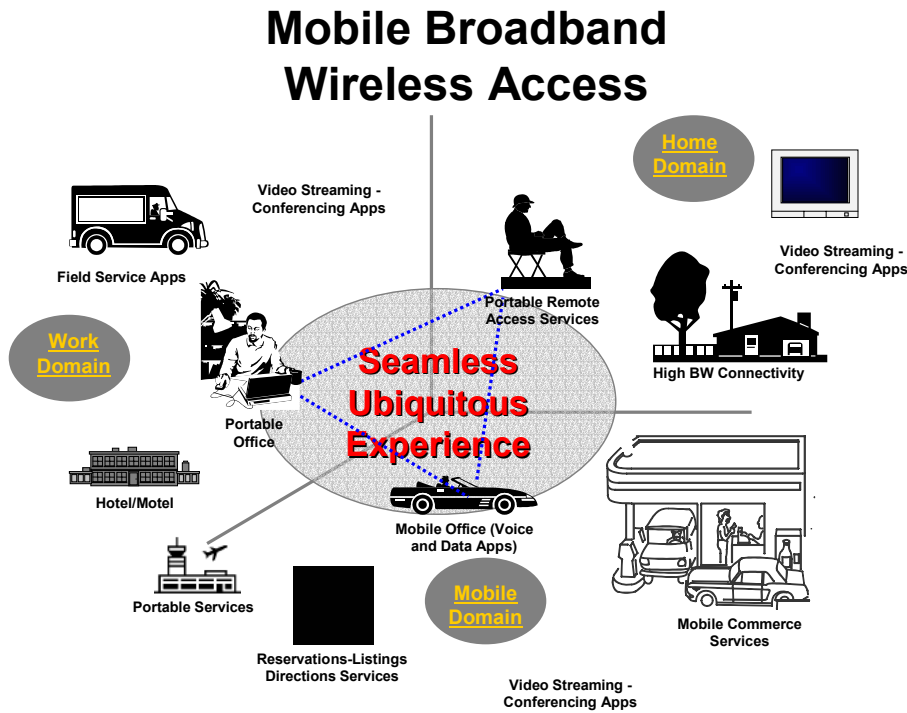

3
4

5 The 802.20 Air-Interface (AI) shall be optimized for high-speed IP-based data services
 6 operating on a distinct data-optimized RF channel. The AI shall support compliant
 7 Mobile Terminal (MT) devices for mobile users, and shall enable improved performance
 8 relative to other systems targeted for wide-area mobile operation. The AI shall be
 9 designed to provide best-in-class performance attributes such as peak and sustained data
 10 rates and corresponding spectral efficiencies, system user capacity, air- interface and end-
 11 to-end latency, overall network complexity and quality-of-service management.
 12 Applications that require the user device to assume the role of a server, in a server-client
 13 model, shall be supported as well.

14 **Applications:** The AI all shall support interoperability between an IP Core Network and
 15 IP enabled mobile terminals and applications shall conform to open standards and
 16 protocols. This allows applications including, but not limited to, full screen **video**, full
 17 graphic web browsing, e- mail, file upload and download without size limitations (e.g.,
 18 FTP), video and audio streaming, IP Multicast, Telematics, Location based services,
 19 VPN connections, VoIP, instant messaging and on- line multiplayer gaming.

1 **Always on:** The AI shall provide the user with “always-on” connectivity. The
2 connectivity from the wireless MT device to the Base Station (BS) shall be automatic and
3 transparent to the user.

4 **2.1 Voice Services (Closure Proposed)**

5 The MBWA will support VoIP services. QoS will provide latency, jitter, and packet loss
6 required to enable the use of industry standard Codec’s.

Deleted: When the bandwidth required for a call cannot be reserved, the system will provide signaling to support call blocking.

7 **3 System Reference Architecture (open)**

8 **3.1 System Architecture (open)**

9 The 802.20 systems must be designed to provide ubiquitous mobile broadband wireless
10 access in a cellular architecture. The system architecture must be a point to multipoint
11 system that works from a base station to multiple devices in a non-line of sight outdoor to
12 indoor scenario. The system must be designed to enable a macro-cellular architecture
13 with allowance for indoor penetration in a dense urban, urban, suburban and rural
14 environment.

15 Editors Note Diagram in Appendix B

16 Action: Change the notations in the bubbles to point to the relevant
17 section of the text (or remove the bubbles). <John Fan 7/23/03>

Deleted: <sp>

20 The AI shall support a layered architecture and separation of functionality between user,
21 data and control planes. The AI must efficiently convey bi-directional packetized, bursty
22 IP traffic with packet lengths and packet train temporal behavior consistent with that of
23 wired IP networks. The 802.20 AI shall support high-speed mobility.


24 **3.1.1 MBWA System Reference Architecture (open)**

Formatted: Bullets and Numbering


25 3.1.1 MBWA System Reference Architecture

Deleted: “To be supplied by Mark Klerer and Joanne Wilson”

27 To facilitate a layered approach, the 802.20 specification shall incorporate a reference partitioning
28 model consisting of the MAC and PHY. This layered approach shall be generally consistent with
29 other IEEE 802 standards and shall remain generally within the scope of other IEEE 802 standards as
30 shown in figures 1 & 2. The standard includes PHY and MAC layer specifications with a well-
31 defined service interface between the PHY and MAC layer. To provide the best possible
32 performance, the MAC layer design is optimized for the specific characteristics of the air interface
33 PHY.

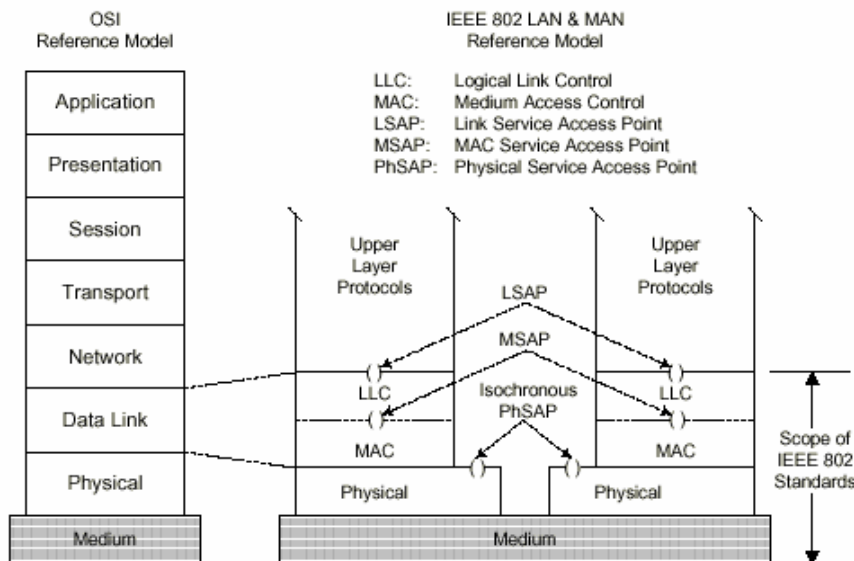

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32

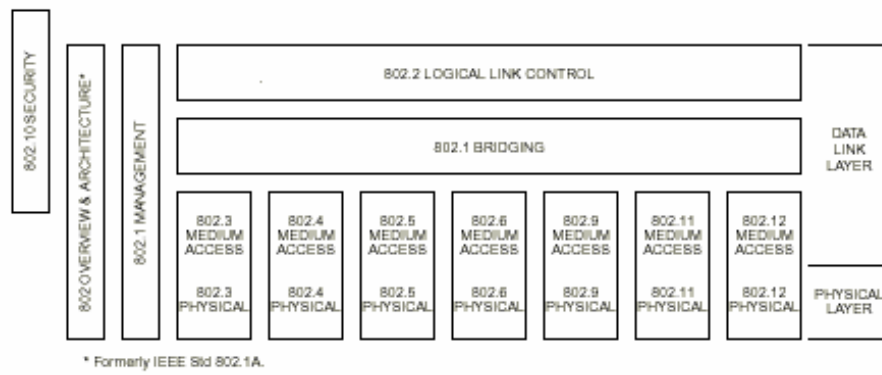

<Mark KI

Formatted: German (Germany)

MBWA-Specific Reference Model

The 802.20 reference model consists of two major functional layers, the Data Link Layer (DLL) and the Physical Layer (PHY).

The MAC comprises three sublayers. The Service Specific Convergence Sublayer (CS) provides any transformation or mapping of external network data, received through the CS service access point (SAP), into MAC SDUs (Service Data Unit) received by the MAC Common Part Sublayer (MAC CPS) through the MAC SAP. This includes classifying external network SDUs and associating them to the proper MAC service flow and Connection ID. It may also include such functions as payload header suppression. Multiple CS specifications are provided for interfacing with various protocols. The internal format of the CS payload is unique to the CS, and the MAC CPS is not required to understand the format of or parse any information from the CS payload.

The MAC Common Part Sublayer (CPS) provides the core MAC functionality of system access, bandwidth allocation, connection establishment, and connection maintenance. It receives data from the various CSs.

1 through the MAC SAP, classified to particular MAC connections. QoS is applied to the transmission and
2 scheduling of data over the physical layer.

3 The MAC also contains a separate Security Sublayer providing authentication, secure key exchange, and
4 encryption.

5 Data, physical layer control, and statistics are transferred between the MAC CPS and the physical layer
6 (PHY) via the PHY SAP.

7 I propose to adopt the MBWA-Specific Reference Model and its
8 explanation from the attachment, that will replace 5.1.1.

9
10 Reasons for that are:

11
12 - 802.1 bridging, in Fig. 2, is actually beyond the standard;
13 including it in the standard scope will make the radio behave as a
14 Ethernet bridge and will have implications in frame headers (look at
15 802.11 MAC, carrying if I remember well, up to four Ethernet addresses
16 in the frame header);

17
18 - 802.1 Management, in Fig. 2 is actually insufficient for access
19 systems, being suitable only for LAN and WLAN systems;

20
21 - Security functions are not shown;

22
23 - Management functions and their interaction with
24 MAC/PHY/Security is not shown;

25
26 - PHY interaction with the radio deployment is not shown.

27
28 <Marianna 7/29/03>

29
30 **3.1.2 Layer 1 to Layer 2 Inter-working (Closure Proposed)**


← Formatted: Bullets and Numbering

31 The interface between layers 1 and 2 is not an exposed interface; it may be handled at the
32 implementer's discretion.

33
34 **3.2 Definition of Interfaces (Closure Proposed)**

35 Open interfaces: The AI shall support open interfaces between the base station and any
36 upstream network entities. Any interfaces that may be implemented shall use IETF
37 protocols as appropriate. Some of the possible interfaces are illustrated below.

MBWA Interfaces

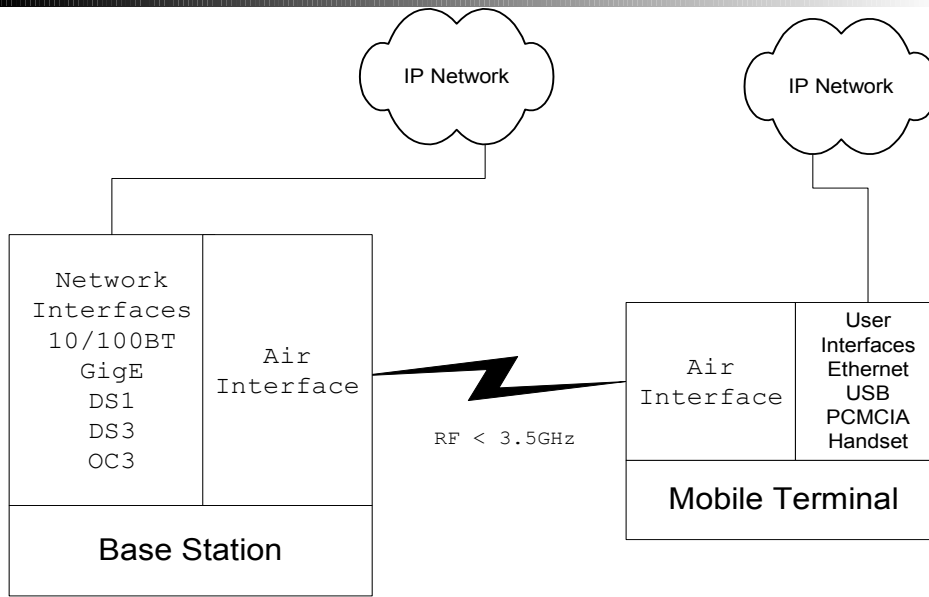

1

2 <Alan Chickinsky 8/7/2003>

3 **4 Functional and Performance Requirements (open)**

4 **4.1 System (open)**

5 **4.1.1 System Gain and Spectral Efficiency will be discussed time to be set** "section to be provided by Arif Ansari, Reza Arefi, Jim Mollenauer, and Khurram Sheikh". (open)

6
7 The system gain shall be at a minimum 160dB for all devices and terminals at the average per user data rates specified in section 4.1.7 (DL >= 512 Kb/s, UL >= 128 Kb/s) using a 1.25 MHz carrier.

8
9
10 The **system gain** is defined as the maximum allowable path loss, expressed in decibels (dB), that can be tolerated between the base station antenna and the mobile device antenna while maintaining a bit error rate of 10e-6 for both the uplink and downlink paths.

11

12 **Rationale**

13
14
15 The system gain requirement must be specified in order to quantify the maximum allowable path loss in considering various vendor proposals without considering specifics regarding a particular implementation or network topology.

16
17
18 <Neka C. Hicks 7/28/03>

19

20 The 802.20 air interface specification is required to provide appropriate means to enable future

Formatted: Bullets and Numbering

1 implementations of 802.20 to maximize their system gain as defined below. This can be achieved
2 through a combination of factors including receiver threshold for specific modulation schemes at
3 specified bit error probability. It is expected that numerical values for system gain and related
4 parameters be provided in the air interface evaluation criteria process.

5 The **system gain** is defined as the difference, in dB, between transmitter power output at the
6 base station and the receiver threshold (sensitivity) at the mobile terminal.

7
8 **Rationale**

9 Defining system gain through maximum allowable path loss (a link budget term), as Neka
10 provided, has the problem of becoming deployment specific since it includes antenna gains and
11 cable losses, etc. That's the reason why we decided not to have a section on link budget but only
12 define system gain. The definition provided here makes it only dependent on the transmitter
13 power and the receiver design for specific modulation, specific Eb/No requirement and specific bit
14 error rate, all of which are part of the evaluation criteria for comparing air interface proposals. It is
15 clear that one should not expect the same system gain for QPSK and 64QAM. Also, it is not
16 favorable to set the requirement for only one scenario (e.g., lowest order modulation, or average
17 rates, etc.). Consequently, the functional requirements document should only ask for the
18 maximization of system gain and leave the actual numbers to the proposal evaluation process.

19 <Arefi Reza 8/1/03>

Formatted: Normal

20
21
22 **4.1.2 Spectral Efficiency (bps/Hz/sector) (open)**

23 Rewritten to accommodate Michael Youssefmir comments along with perceived meaning and Jim Landons
24 contribution. Michael Youssefmir to supply definition of expected aggregate throughput for Apendix B.

25 Sustained spectral efficiency is computed in a loaded multi-cellular network setting. It is
26 defined as the ratio of the expected aggregate throughput (taking out all PHY/MAC
27 overhead) to all users in an interior cell divided by the system bandwidth. The sustained
28 spectral efficiency calculation shall assume that users are distributed uniformly
29 throughout the network and shall include a specification of the minimum expected data
30 rate/user.

Deleted: <#>Link Budget
Link budget has been proposed at 150-170, 160-170 and removed.
The system link bud get shall be 160-170 dB for all devices and terminals at the data rates specified in the earlier section assuming best practices in terms of base station design, user terminal design, and deployment techniques.
Formatted: Bullets and Numbering
Deleted: Sprints

31 Downlink > 2 bps/Hz/sector

32 Uplink >1 bps/Hz/sector

33 **Comment**

34 Action: Change to downlink sustained spectral efficiency of >1
35 bps/Hz/sector, as stated in the PAR. Remove the mention of uplink
36 sustained spectral efficiency.

37
38 Rationale: The numbers that appear in the Requirements Document for
39 sustained spectral efficiency should match the PAR. The PAR is the
40 defining document we have today for 802.20 and there clearly was no
41 consensus on the new proposed numbers at the plenary. The degree to

1 which the PAR requirements are exceeded can be incorporated in the
2 evaluation criteria for the AI proposals.

3 <John Fan 7/23/03>

4 **4.1.3 Frequency Reuse (open)**

5 The AI shall support universal frequency reuse. The AI should allow
6 also for system deployment with frequency reuse factors of less than or
7 greater than 1. <John Fan 7/23/03>

8 Proposed Deleted text

9 “universal frequency reuse but also allow for system deployment with frequency reuse factors of less than
10 or greater than 1”

11

12 Proposed New text

13 The AI shall support any frequency reuse scenario with $N \geq 1$.

14 **Frequency reuse (N)** is defined as the total number of sectors in a given configuration
15 divided by the number of times that the same frequency is reused.

16 **Rationale**

17 This change is recommended in an effort to provide a little more clarity.

18 <Neka Hicks 7/29/03>

19 Proposed New text

20 The AI shall support any frequency reuse scenario, on a per sector
21 basis, with $N \leq 1$.

22
23 Frequency reuse (N) is defined as the reciprocal of the number of times
24 a frequency can be used in a single sector, recognizing that an omni-
25 directional cell is referred to as a "single sector" cell.

26

27
28 **Rationale**

29 This change is recommended in an effort to provide a little more
30 clarity.

31 <Joanne Wilson 7/29/02>

32

33 **4.1.4 Channel Bandwidths (open)**

34 Unresolved

35 The AI shall support channel bandwidths in multiples of 5MHz in downlink and the
36 uplink.

37 Action: This section should be stricken.

38

Deleted: The AI shall support universal frequency reuse but also allow for system deployment with frequency reuse factors of less than or greater than 1.

Formatted: Font: Times, 12 pt, Underline

Formatted: Normal

Formatted: Font: Times, 12 pt, Underline

Formatted: Normal

1 Rationale: The current text requires "multiples of 5 MHz" for
2 deployment. No rationale for 5Mhz has been given on the reflector.
3 Beyond that, a 5 MHz minimum bandwidth would limit the applicability of
4 the MBWA AI in many of the available licensed bands below 3.5 GHz.

5 <John Fan 7/23/03>

6 **4.1.5 Duplexing (open)**

7 The AI shall support both Frequency Division Duplexing (FDD) and Time Division
8 Duplexing (TDD).

Deleted:).

10 **4.1.6 Mobility (Closure Proposed)**

11 The AI shall support different modes of mobility from pedestrian (3 km/hr) to very high
12 speed (250 km/hr). As an example, data rates gracefully degrade from pedestrian speeds
13 to high speed mobility.

Deleted: but shall not be optimized for only one mode

Deleted:

14 **4.1.7 Aggregate Data Rates – Downlink & Uplink (open)**

15 Michael Youssefmir from Arraycomm asked the previous two tables be stricken. Khurram Sheikh
16 contributed the following table for 5 MHz channels in line with the spectral efficiency above. Kei Suzuki
17 believes the numbers were not reflective of the Par. Shall the PAR be minimums?

Deleted: Sprint

19 The aggregate data rate for downlink and uplink shall be consistent with the spectral
20 efficiency. An example of a 5MHz FDD channel is shown in Table 1 below.

Description	Downlink	Uplink
Outdoor to Indoor <u>Expected</u> Aggregate Data Rate	> 10 Mbps/Sector	> 5Mbps/Sector

Deleted: Average

Formatted: Centered

22 TDDAggregate Data RateExample 16QAM Weighted

<u>Description</u>	<u>Downlink</u>	<u>Uplink</u>
<u>Outdoor to Indoor</u> <u>Expected Aggregate Data</u> <u>Rate</u>	<u>> 10 Mbps/Sector</u>	<u>> 5Mbps/Sector</u>

24 <Submitted Bill Young 7/22/03>

26 Action: Remove this table.

Formatted: Font color: Black

28 Rationale: The sustained spectral efficiency is defined as >1
29 b/s/Hz/sector in the PAR, so that the expected aggregate data rates
30 should be >5 Mbps/sector. Hence, the numbers in this table are not
31 consistent with the numbers in the PAR. This issue of expected
32 aggregate data rates should be addressed in the evaluation criteria.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43

Action: Remove the sentence "Average user data rates in a loaded system shall be in excess of 512Kbps downlink and 128Kbps uplink. This shall be true for 90% of the cell coverage or greater."

Rationale: These expected per-user data rates are ill-defined because as discussed on 7/23/03 they depend on the overall combination of coverage and aggregate capacity and system deployment. Expected per-user rates are not an intrinsic characteristic of the system. This issue of expected per-user data rates should be addressed in the evaluation criteria. <John Fan 7/23/03>

Regarding Average Aggregate Data Rate specification definition, I would like to raise simple question.

Currently, Description of Rev.5 (DL: 10Mbps / UL 5Mbps) and new proposal from Mr. Bill Young (DL:7 Mbps / UL 4 Mbps) is not same ratio of Downlink and Uplink as PA peak user data rate and Peak aggregate data rate per cell

PAR peak data rate DL:UL > 1Mbps : >300Kbps = 10 :3

PAR aggregate data rate DL:UL > 4Mbps : >800Kbps = 10 : 2

Requirements Rev.5 Average Aggregate data rate >10Mbps : > 5 Mbps = 10 : 5

New proposal from Mr. Bill young DL:UL > 7Mbps : > 4 Mbps = 10 : 6

To respect peak data rate in PAR and in Rev. 5 description , I think we may need to keep same ratio of DL and UL because it is difficult to explain this unbalance description between peak data rate and Average Aggregate data rate

Average Aggregate Data Rate DL:UL = 10 Mbps : 3 Mbps or 7Mbps : 2.1 Mbps

< Kazuhiro Murakami 7/24/03>

Can you expand on why you specify the per user data rates in terms of a specific modulation bandwidth? Why not specify the throughput without the bandwidth constraint?

<Walter Rausch 7/31/03>

Formatted: Font color: Black

Formatted: Bullets and Numbering

4.1.7.1 User Data Rates -- Downlink & Uplink (Closure Proposed)

1 The AI shall support peak per-user data rates in excess of 1 Mbps on the downlink and in
2 excess of 300 kbps on the uplink. These peak data rate targets are independent of channel
3 conditions, traffic loading, and system architecture. The peak per user data rate targets
4 are less than the peak aggregate per cell data rate to allow for design and operational
5 choices.

6 Average user data rates in a loaded system shall be in excess of 512Kbps downlink and
7 128Kbps uplink. This shall be true for 90% of the cell coverage or greater.

8 **4.1.8 Number of Simultaneous Sessions (open)**

9 Jim Landon added a definition

10 100 sessions per carrier for a 5Mhz system. "Simultaneous" will be defined as the
11 number active-state Mobile Terminal having undergone contention/access and scheduled
12 to utilize AI resources to transmit/Receive data within a 10 msec time interval.

13 Action: Change title to "Number of Simultaneous Active Users"

14 Rationale: The term "session" is inappropriate since it is not clear
15 what it refers to, e.g., TCP session, application session, etc. Also,
16 the intent of the current text seems to be to place a minimum
17 requirement on the number of users that are able to access the system at
18 low latency. This is also the intent and definition of active users.

19 Action: Use the definition of active user given in the Appendix.

20
21
22
23
24 Text: "The system should support > 100 simultaneous active users per
25 carrier. An active user is a terminal that is registered with a cell
26 and is using or seeking to use air link resources to receive and/or
27 transmit data within a short time interval (e.g., within 50 or 100 ms)."

28 > <John Fan 7/23/03>

29 4.1.8 "Number of Simultaneous Sessions" the author quotes a number
30 ">100". We need further qualification on that number. I see MAC having
31 two types of traffic. One that is time critical (Voice/streaming) and
32 one that can accept delays (data). So are we saying > 100 voice or > 100
33 of some combination. If it is some combination, we need to specify what
34 the ratio is.

35 < Comment by Alan Chickinsky 8/7/2003>

36
37 **4.1.9 Latency (open)**

38 The system shall have a one-way target latency of 20 msecs from the base station to the
39 end-device when the system is under load.

40 The AI shall minimize the round-trip times (RTT) and the variation in RTT for
41 acknowledgements, within a given QoS traffic class. The RTT over the airlink for a
42 MAC data frame is defined here to be the duration from when a data frame is received by
43 the physical layer of the transmitter to the time when an acknowledgment for that frame
44 is received by the transmitting station. The airlink MAC frame RTT, which can also be
45 called the "ARQ loop delay," shall be less than 10 ms. Fast acknowledgment of data
46 frames allows for retransmissions to occur quickly, reducing the adverse impact of

Deleted: SprintDavid McGinniss added a definition.

Formatted: Bullets and Numbering

Inserted: David McGinniss

Deleted: Sprint added a definition.

Inserted: Sprint added a definition.

Deleted: >

Formatted: Font: 12 pt

Formatted: Justified, Space Before: 12 pt, No bullets or numbering

Formatted: Font: Times

Formatted: Bullets and Numbering

Formatted: Indent: Left: 0.03"

Deleted: , over the air interface

Deleted: .

1 retransmissions on IP packet throughput. This particularly improves the performance of
2 gaming, financial, and other real-time low latency transactions.

3 Action: Remove the sentence: "The system shall have a one-way target
4 latency of 20 msec from the base station to the end-device when the
5 system is under load."

6
7 Rationale: This is attempting to reflect the latency for applications,
8 which may be better to evaluate in the evaluation criteria, since it
9 will depend on traffic models, QoS of individual users and load
10 conditions. It is appropriate to specify latency from the time that a
11 packet is delivered from the transmitting-side MAC until the time that
12 it is received at the receiving side MAC. This is reflected in the
13 second paragraph describing the ARQ loop delay.

14 <John Fan 7/23/03>

15 **4.1.10 Packet Error Rate (open)**

16 Joseph Cleveland to provide initial exploder response.

17 The physical layer shall be capable of adapting the modulation, coding, and power levels
18 to accommodate RF signal deterioration between the BS and user terminals. The air
19 interface shall use appropriate ARQ schemes to ensure that error rates are reduced to a
20 suitably low level in order to accommodate higher level IP based protocols (for example,
21 TCP over IP). The packet error rate for 512 byte IP packet shall be less than 1 percent
22 after error correction and before ARQ.

Deleted: s

23 The physical layer shall be capable of adapting the modulation, coding, and power levels to
24 accommodate RF signal deterioration between the BS and user terminals. The air interface shall
25 use appropriate ARQ schemes to ensure that error rates are reduced to a suitably low level in
26 order to accommodate higher level IP based protocols (for example, TCP over IP). If the
27 received Eb/No exceeds the minimum required value for reliable reception as specified in Section
28 4.2.1, the packet error rate for IP packet for any active call shall be less than 1 percent after
29 channel decoding for error correction and before ARQ with a 95% confidence.

30 < Joseph Cleveland 7/23/03>

31 Action: Remove the sentence "The packet error rate for 512 byte IP
32 packet shall be less than 1 percent after error correction and before
33 ARQ"

34
35 Rationale: The current text mixes various levels: the packet is at the
36 IP level (which may consist of multiple air interface packets), while
37 the requirement is placing limits on air interface performance before
38 ARQ.
39 Any packet error rate for IP needs to be after the link-layer ARQ, since
40 this link-layer ARQ would be used in the system. In this context, it
41 would
42 make more sense to use the frame error rate rather than the packet error
43 rate, and the frame error rate requirement could be stated before ARQ.
44

45 From the requirements point of view, the existing text without this
46 sentence already captures what is required of the system.
47

48 <John Fan 7/23/03>

Folk-

-

I am having a problem with a the use of ARQ at the physical layer. If I use only IP, it what is called "connectionless" connection. ICMP packets, which use IP are connectionless. At some point we will define voice packets (ok VOIP) as connectionless, since these packet have an expiration time. For voice, if you exceed the expiration time, the packet is void. So we need to define when we use ARQ and when not. Or do we look at our satellite friends and use Forward Error Correction. Then we assume we have one chance to get the data. And if we loose or incorrectly correct the data, the upper layer will detect it. Or is someone saying the proposed channel is so flaky that we cannot reliably transfer data.

-

Another example of a non ARQ physical layer is ATM (ok I bit my tongue).

-

<Alan Chikinsky 7/24/03>

4.1.11 Frame Error Rate

The physical layer shall be capable of adapting the modulation, coding, and power levels to accommodate RF signal deterioration between the BS and user terminals. The air interface may use appropriate ARQ schemes to ensure that error rates are reduced to a suitably low level in order to accommodate higher level IP based protocols (for example, TCP over IP). The frame error rate shall be less than 1 percent, with 95% confidence, after channel decoding and before any link-level ARQ, measured under conditions specified in Section xx.

Rationale

The purpose of the requirement is to specify the physical layer performance for delivery of data frames for upper protocol layers by the air interface. It is not written as a RF sensitivity requirement, which is covered in the RF section (4.2.1). The RF sensitivity requirement will specify the Eb/No, channel model, etc.

<Joseph Cleveland 7/24/03>

Thank you for taking your time to work for the requirements. But I still have two concerns on the current requirement statement of 4.1.10 packet error rate.

One:

If I understand the description of 4.1.10 subsection correctly, the mentioned packet errors mean errors over the air. In this case, packets from the higher layer are segmented usually at MAC (Multiple Access Control) layer into frames in a certain size for the efficient transmisson over the radio channel. The terminology of Frame Error Rate(FER) would be better than Packet Error Rate(PER).

<Jin Weon Chang 7/28/03>

I see that this discussion is moving into specific design requirements such as frame length instead of addressing functional requirements.

Formatted: Font: (Default) Helvetica, Font color: Auto

Formatted: Heading 3,h3,3,H3, Space Before: 0 pt, After: 0 pt, Widow/Orphan control, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto

Formatted: Font color: Auto

1) 1) An FER requirement seems to be irrelevant absent the specifics of the design and would have different performance implications for different designs. As Jheroen pointed out a specific requirement such as 1% will bias the requirement to shorter frames, and, as your response indicates we rapidly have to go down the path of specifying frame lengths to make the requirement have meaning. I think we are far better off having the requirements document focus on high level functional requirements and not specify specifics such as frame length.

2) 2) As Jinweon pointed out tuning of FERs has performance implications in trading off throughput and latency. For latency insensitive data, the "FER can be less strict in order to maximize throughput over the air", and for other data, the "FER needs to be tightly controlled below a certain threshold". Again I therefore think it is premature to define a specific FER.

For these reasons, I continue to believe that we should remove the specific FER value and therefore delete the sentence:

"The frame error rate shall be less than 1 percent, with 95% confidence, after channel decoding and before any link-level ARQ, measured under conditions specified in Section xx."

Mike
ArrayComm, Inc.

Specifying frame length is certainly outside the scope of the functional requirements document.

Reza

I agree that the MAC/PHY must be able to handle various application requirements in terms of data loss/error rates etc in a flexible manner. However, given the IP-centric nature of system, it might be better for application QoS requirements such as these to be framed in a more unified and comprehensive manner through use of the diffserv architecture (for which there seems to be broad support in the group).

<Samir Kapoor 8/3/03>

Jim's text "The Air Interface (PHY+MAC) shall include mechanisms to allow negotiating a range of latency vs. data loss/error rates subject to application types." seems close to ideal. The only possible change could be "control" instead of "negotiation" (which is a particular type of control; e.g. configuration is another type).

Argumentation for having DiffServ [or another specific mechanism of QoS control] seems not sufficient.

We have to differentiate between "IP-centric" and "IP-aware". There seems to be a wide consensus about "IP-centric" meaning MAC/PHY optimized for transferring traffic with characteristics similar to those we used to see in IP traffic [bursty nature, nIPP models, ... etc.]. "IP-awareness" would mean that virtually every 802.20 device should operate as IP host with functions like DiffServ [or IntServ or RSVP or MPLS, ... endless list]. I don't think,

IP-awareness would gain serious support - business of IEEE 802 wireless is MAC/PHY.

We may learn from another groups and concentrate on MAC/PHY with possible addition

1 of classification of non-802.20 data units (Ethernet packets, IP datagrams etc.). Classifier
 2 looks at certain fields of IP datagram, for example, at TOS field, and decides whether
 3 certain MAC/PHY rule [e.g. lower delay with less restrictions on FER] is applicable to
 4 the datagram.
 5 Such approach does not preclude from further development of complimentary standard
 6 that may point e.g. to DiffServ
 7 as a recommended QoS control protocol; but such a standard should be separated
 8 from MAC/PHY specifications.
 9 Example of complimentary standard: PacketCable [for DOCSIS MAC/PHY]

10 -
 11 <Vladimir Yanover 8/4/2003>

12 "I assume that this requirement is a layer 3+. If not, a 512 byte
 13 packet could be several air interface PDUs. (Look at Mark's recent
 14 proposal for the system diagram for a definition of a PDU). 802.20
 15 needs to define the error rate after FEC (if we are using
 16 FEC). So do we need to create a derived requirement from this one?
 17 it states that the "... AI shall use appropriate ARQ schemes...". I
 18 would suggest we say "...the AI shall use error detection and error
 19 correction schemes..." I make this suggestion, because PDUs with voice
 20 traffic will be sent. And if not received correctly and it can not be
 21 corrected, the PDU will be discarded.
 22 "

Formatted: Left, Indent: Left: 0",
 Space Before: 0 pt, Don't adjust
 space between Latin and Asian text,
 Don't adjust space between Asian
 text and numbers

23 <Comment By Alan Chickinisky8/7/2003>

Formatted: Left, Indent: Left: 0",
 Space Before: 0 pt, Don't adjust
 space between Latin and Asian text,
 Don't adjust space between Asian
 text and numbers

24
 25 **4.1.12 Support for Multi Antenna Capabilities (Closure Proposed)**

26
 27 Interconnectivity at the PHY/MAC will be provided at the Base Station and/or the Mobile
 28 Terminal for advanced multi antenna technologies to achieve higher effective data rates,
 29 user capacity, cell sizes and reliability. As an example, MIMO operation,

Formatted: Font: (Default) Courier
 New

Formatted: Bullets and Numbering

Deleted: Use of

Deleted: Support

Deleted: ¶

30 **4.1.13 Antenna Diversity (open)**

Formatted: Bullets and Numbering

31 At a minimum, both the Base Station and the Mobile Terminal shall provide two element
 32 diversity. Diversity may be an integral part of an advanced antenna solution.

33 Action: Change to ;§The Base Station shall provide antenna diversity.
 34 Diversity may be an integral part of an advanced antenna solution.
 35 Antenna diversity shall not be a requirement of the mobile station.;

36
 37 Rationale: This requirement is a vendor specific implementation
 38 requirement, and not related to the MAC/PHY Also this material was not
 39 introduced with a rationale. In fact, Rev3 of the document contained the
 40 text ;§Antenna diversity shall not be a requirement of the mobile
 41 station.;" We should leave it up to vendors/operators who understand the
 42 cost/form factor tradeoffs whether they support user terminal diversity.
 43 For example, there is a wide variety of 802.11 cards some have
 44 diversity/some do not.

45 <John Fan 7/23/03>

46 Section 4.1.12 - Antenna Diversity
 47
 48

1 Current text

2
3 At a minimum, both the Base Station and the Mobile Terminal shall
4 provide two element diversity. Diversity may be an integral part of
5 an advanced antenna solution.

6 Proposed New text
7 N/A(Delete section)

8
9
10 Rationale

11
12 Support for multiple antenna capability is described section 4.1.11.
13 Section 4.1.12 defines a minimum antenna number for
14 Base Station and Mobile Terminal.

15 There is a contradiction between 4.1.11 and 4.1.12.
16 Only section 4.1.11 description is enough for multiple antenna
17 capability I
18 think.

19 And the antenna number of Mobile Terminal should not be defined in the
20 Requirements Document.
21 The important thing is the system performance with cost.

22
23 Thank you.

24 <Kimura Shigeru 8/7/2003

25
26 I have to disagree with your notion of not putting a minimum requirement
27 on antenna diversity. Current generation systems have these capabilities
28 in the pipeline, so it seems very illogical not to shoot for higher
29 performance by putting at least a minimum requirement for antenna
30 diversity.

31
32 Bets Regards

33 <Khurram Sheikh 8/7/2003>

34 Dear Khurram-san

35
36 I consider many kinds of Mobile Terminals.
37 Some kinds of mobile terminal will not require to achieve high performance up
38 to 250km/h.
39 High end terminal will have two or more antenna diversity to achieve
40 high performance up to 250Km/h.
41 Single antenna may be enough for low end terminal in case of TDD System.
42 So single antenna option may be important for TDD system.

43 <Kimura Shigeru 8/8/2003>

44 "At a minimum, both the Base Station and the Mobile Terminal shall provide two element
45 diversity. Diversity may be an integral part of an advanced antenna solution.

1 Action: Change to !§The Base Station shall provide antenna diversity. Diversity may be an
2 integral part of an advanced antenna solution. Antenna diversity shall not be a requirement of the
3 mobile station.!"

4
5 Rationale: This requirement is a vendor specific implementation requirement, and not related to
6 the MAC/PHY Also this material was not introduced with a rationale. In fact, Rev3 of the
7 document contained the text !§Antenna diversity shall not be a requirement of the mobile
8 station.!" We should leave it up to vendors/operators who understand the cost/form factor
9 tradeoffs whether they support user terminal diversity. For example, there is a wide variety of
10 802.11 cards some have diversity/some do not."

11 -----
12 -----

13
14 Therefore, proposed new text for this section:

15
16 "The base station shall provide support for multiple antenna processing."

17
18 <Samir Kapoor 8/8/2003>

19 Dear Khurram,

20
21
22 I don't understand your argument for requiring that 802.20 terminals
23 have antenna diversity. As you stated, existing systems have these
24 capabilities in the pipeline. Therefore, in the future there will be
25 mobile terminals with and without antenna diversity. I don't believe
26 that existing systems will stop supporting terminals with a single
27 antenna. As you know, market needs vary for many reasons in different
28 places and with different market segments, often requiring tradeoffs
29 between performance, cost and other factors like terminal size. I
30 believe what Kimura-san is proposing is that 802.20 support having
31 terminals with multiple antennas, but that terminals with single
32 antennas would also be allowed. This seems extremely reasonable and it
33 should be in both the operators' and the consumers' interest. I also
34 support Samir's proposal to use the term "multi-antenna processing"
35 instead of antenna diversity as it is broader in scope.

36 Best regards,

37
38
39 <Joanne Wilson 8/8/2003>

40 Hi Khurram and Shigeru,

41 I agree with Joanne regarding a requirement that terminals support diversity: diversity antennas should not
42 be a mandatory requirement. What I suggest is that if antenna diversity in the terminal is provided, then
43 specific performance and/or processing requirements shall be met. An example is 2x2 antenna
44 configuration with Alamouti coding.

45 <Joseph Cleveland 8/8/2003>

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45

4.1.14 Best Server Selection (open)

In the presence of multiple available Base Stations, the system Phy/MAC will select the best server based upon system loading, signal strength, capacity and tier of service. Additional weighting factors may also include back haul loading and least cost routing.

Walter Rausch,

Action: Delete entire section

Rationale: This material was not introduced with a rationale.

<John Fan 7/23/03>

I agree with Fan John's comment on July 24 as follows.

Section 4.1.13 is never proposed, discussed by E-mail contributions.

>4.1.13 Best Server Selection

>Action: Delete entire section

>Rationale: This material was not introduced with a rationale.

<Masaaki Yuza 8/7/2003>

4.1.15 QoS (open)

The AI shall support the means to enable end-to-end QoS within the scope of the AI and shall support a Policy-based QoS architecture. The resolution of QoS in the AI shall be consistent with the end-to-end QoS at the Core Network level. The AI shall support IPv4 and IPv6 enabled QoS resolutions, for example using Subnet Bandwidth Manager. The AI shall support efficient radio resource management (allocation, maintenance, and release) to satisfy user QoS and policy requirements

Action: Delete phrase ;\$for example, using Subnet Bandwidth Manager.;

Rationale: Subnet bandwidth manager (SBM), defined by RFC 2814, addresses the issue of IntServ RSVP bandwidth reservation over local area networks. Bandwidth reservation is not a meaningful concept with non-deterministic physical layers such as one would expect to see in a mobile radio system. Section 4.4.1 of this document, moreover, calls for a DiffServ QoS model.<John Fan 7/23/03>

Introduction

This section proposes a set of QoS requirements as well as a rationale for the recommendation.

Formatted: Bullets and Numbering

Deleted: Network availability¶ It has been proposed this be deleted as an operator Sprint

Deleted: Jim Landon, David McGinniss

Inserted: Jim Landon, David McGinniss, Walter Rausch, and Khurram Sheikh

Deleted: , and Khurram Sheikh

Deleted: feels it is a minimum target.¶ The end to end system availability shall be 99.9%.

Deleted: O

Formatted: Bullets and Numbering

Formatted: Left, Space Before: 0 pt, Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers

Formatted: Font: (Default) Courier New

Formatted: Normal

Formatted: Font: Times, 10 pt

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37

Rationale

Formatted: Normal

Different services require different levels of resource utilization and hence a multi service system must be able to manage resources to ensure acceptable service quality. QoS and CoS are utilized by operators as means to provide service differentiation levels to reflect services which require different levels of system resources. The key goal is to enable a business model, which allows more valuable or resource intensive services to be differentiated (usually through tiered pricing) from services, which do not require as many system resources.

Since the MBWA system is an integral element of the Internet it makes sense to adopt a QoS model, which is used in conventional IP networks. The IETF DiffServ model provides a standards-based, scalable mechanism appropriate for managing the non-deterministic physical connections characteristic of mobile radio systems. DiffServ provides a framework for rate limiting — e.g., to permit an operator to offer services tiered by data rate — precedence, latency and jitter management. **Proposal**

802.20 protocols shall provide mechanisms for quality of service (QoS). The 802.20 protocol standards shall define the interfaces and procedures that facilitate the configuration and enforcement of QoS policies, which operators may choose to implement.

The 802.20 air interface shall support the IETF Differentiated Services (DS) Architecture to be compatible with other IP network standards including IP mobile standards. To this end, 802.20 shall support the standard DiffServ QoS model. Some of the forwarding behaviors that should be supported by 802.20 include: Expedited Forwarding (EF), Assured Forwarding (AF), and Best Effort (BE) DS Per Hop Behaviors (PHBs) as defined by the RFC 2597 and RFC 2598. 802.20 shall also support configuration of the PHBs by a DS API that shall be based on a subset of the information model defined in RFC 3289.

Service and QoS Mapping

Formatted: Underline

Formatted: Normal

The classes of service and QoS parameters of all services may be translated into a common set of parameters defined by 802.20. A QoS based IP network may employ the Resource Reservation Protocol (RSVP) to signal the allocation of resources along a routed IP path.

Additional Recommendation: that Sections 4.4.1.1 through 4.4.1.16 be differed to the specifications.

Rationale:

The group felt that the level detail was reflective of specifications as opposed to requirements, which are expressed in higher-level terms.

<Bill Young, Arif Ansari, Samir Kappor, Vince Park, Mike Youssefmir 7/24/03>

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36

Following is the revised QoS working submitted by Bill Young on Thursday, July 24th:

4.4.1 Quality of Service

802.20 protocols shall provide mechanisms for quality of service (QoS). The 802.20 protocol standards shall define the interfaces and procedures that facilitate the configuration and enforcement of QoS policies, which operators may choose to implement.

The 802.20 air interface shall support the IETF Differentiated Services (DS) Architecture to be compatible with other IP network standards including IP mobile standards. To this end, 802.20 shall support the standard DiffServ QoS model. Some of the forwarding behaviors that should be supported by 802.20 include: Expedited Forwarding (EF), Assured Forwarding (AF), and Best Effort (BE) DS Per Hop Behaviors (PHBs) as defined by the RFC 2597 and RFC 2598. 802.20 shall also support configuration of the PHBs by a DS API that shall be based on a subset of the information model defined in RFC 3289.

Proposed revised text:

4.4.1 Quality of Service

802.20 protocols shall provide mechanisms for quality of service (QoS). The 802.20 protocol standards shall define the interfaces and procedures that facilitate the configuration and enforcement of QoS policies, which operators may choose to implement.

The 802.20 air interface shall support the IETF Differentiated Services (DS) Architecture to be compatible with other IP network standards including IP mobile standards. To this end, 802.20 shall support the standard DiffServ QoS model.

Some of the forwarding behaviors that shall be supported by 802.20 include: Expedited Forwarding (EF), Assured Forwarding (AF), and Best Effort (BE) DS Per Hop Behaviors (PHBs) as defined by the RFC 2597 and RFC 2598.

Traffic Classifications for 802.20 forwarding behaviors shall include: Behavior Aggregate (BA) and Multi-Field (MF) classifications as described in RFC 2475. MF classifications should support a broad range of upper layer protocol fields.

1 Traffic Conditioners for compliance with specified Traffic Profiles that shall be supported by 802.20
2 include: Meters, Markers, Shapers, and Droppers, as described in RFC 2475.

3
4 802.20 shall support configuration of the PHBs, MFs and Traffic Conditioner Blocks by a DS API that
5 shall be based on a subset of the information model defined in RFC 3289.

6
7
8 Rationale:

9
10 In addition to PHBs, network operators must have the ability to classify both network microflows and
11 packets based on a subset of criteria for purposes of appropriate prioritization. The system must be able to
12 classify in-profile or out-of-profile microflows that have exceeded or not met a predetermined bitrate, and
13 enforce action to include marking of diffserv field, dropping the packet(s), or delaying the packets to

14 bring the stream into compliance with the traffic profile. When and if the packets/microflows are in
15 compliance, they may be dropped into an appropriate PHB.

16
17
18 <Jim Landon 7/30/03>
19

20 Following is the revised QoS working submitted by Bill Young on Thursday, July 24th:

21
22 4.4.1 Quality of Service

23
24 802.20 protocols shall provide mechanisms for quality of service (QoS). The 802.20 protocol standards
25 shall define the interfaces and procedures that facilitate the configuration and enforcement of QoS policies,
26 which operators may choose to implement.

27
28 The 802.20 air interface shall support the IETF Differentiated Services (DS) Architecture to be compatible
29 with other IP network standards including IP mobile standards. To this end, 802.20 shall support the
30 standard DiffServ QoS model. Some of the forwarding behaviors that should be supported by 802.20
31 include: Expedited Forwarding (EF), Assured Forwarding (AF), and Best Effort (BE) DS Per Hop
32 Behaviors (PHBs) as defined by the RFC 2597 and RFC 2598. 802.20 shall also support configuration of
33 the PHBs by a DS API that shall be based on a subset of the information model defined in RFC 3289.

34
35
36
37 Proposed revised text:

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36

4.4.1 Quality of Service

802.20 protocols shall provide mechanisms for quality of service (QoS). The 802.20 protocol standards shall define the interfaces and procedures that facilitate the configuration and enforcement of QoS policies, which operators may choose to implement.

The 802.20 air interface shall support the IETF Differentiated Services (DS) Architecture to be compatible with other IP network standards including IP mobile standards. To this end, 802.20 shall support the standard DiffServ QoS model.

Some of the forwarding behaviors that shall be supported by 802.20 include: Expedited Forwarding (EF), Assured Forwarding (AF), and Best Effort (BE) DS Per Hop Behaviors (PHBs) as defined by the RFC 2597 and RFC 2598.

Traffic Classifications for 802.20 forwarding behaviors shall include: Behavior Aggregate (BA) and may include Multi-Field (MF) classifications as described in RFC 2475. MF classifications may support a broad range of upper layer protocol fields.

Traffic Conditioners for compliance with specified Traffic Profiles that shall be supported by 802.20 include: Meters, Markers, Shapers, and Droppers, as described in RFC 2475.

802.20 shall support configuration of the PHBs, MFs and Traffic Conditioner Blocks by a DS API that shall be based on a subset of the information model defined in RFC 3289.

Rationale:

In addition to PHBs, network operators must have the ability to classify both network microflows and packets based on a subset of criteria for purposes of appropriate prioritization. The system must be able to classify in-profile or out-of-profile microflows that have exceeded or not met a predetermined bitrate, and enforce action to include marking of diffserv field, dropping the packet(s), or delaying the packets to

bring the stream into compliance with the traffic profile. When and if the packets/microflows are in compliance, they may be dropped into an appropriate PHB.

< Branslav Meandzija 7/30/03>

1 Following is the revised QoS working submitted by Bill Young on Thursday, July 24th:

3 4.4.1 Quality of Service

5 802.20 protocols shall provide mechanisms for quality of service (QoS). The 802.20 protocol standards
6 shall define the interfaces and procedures that facilitate the configuration and enforcement of QoS policies,
7 which operators may choose to implement.

9 The 802.20 air interface shall support the IETF Differentiated Services (DS) Architecture to be compatible
10 with other IP network standards including IP mobile standards. To this end, 802.20 shall support the
11 standard DiffServ QoS model. Some of the forwarding behaviors that should be supported by 802.20
12 include: Expedited Forwarding (EF), Assured Forwarding (AF), and Best Effort (BE) DS Per Hop
13 Behaviors (PHBs) as defined by the RFC 2597 and RFC 2598. 802.20 shall also support configuration of
14 the PHBs by a DS API that shall be based on a subset of the information model defined in RFC 3289.

18 Proposed revised text:

20 4.4.1 Quality of Service

22 802.20 protocols shall provide mechanisms for quality of service (QoS). The 802.20 protocol standards
23 shall define the interfaces and procedures that facilitate the configuration and enforcement of QoS policies,
24 which operators may choose to implement.

26 The 802.20 air interface shall support the IETF Differentiated Services (DS) Architecture to be compatible
27 with other IP network standards including IP mobile standards. To this end, 802.20 shall support the
28 standard DiffServ QoS model.

30 Some of the forwarding behaviors that shall be supported by 802.20 include: Expedited Forwarding (EF),
31 Assured Forwarding (AF), and Best Effort (BE) DS Per Hop Behaviors (PHBs) as defined by the RFC
32 2597 and RFC 2598. The system shall support the ability to bind error coding characteristics and/or ARQ
33 characteristics to a forwarding behavior.

35 Traffic Classifications for 802.20 forwarding behaviors shall include: Behavior Aggregate (BA) and Multi-
36 Field (MF) classifications as described in RFC 2475. MF classifications shall not prevent encapsulating or

1 compressing packets between the mobile and nodes upstream of the BS. MF classifications should support
2 a broad range of upper layer protocol fields.

3

4 Traffic Conditioners for compliance with specified Traffic Profiles that shall be supported by 802.20
5 include: Meters, Markers, Shapers, and Droppers, as described in RFC 2475.

6

7 802.20 shall support configuration of the PHBs, MFs and Traffic Conditioner Blocks by a DS API that
8 shall be based on a subset of the information model defined in RFC 3289.

9

10

11 Rationale:

12

13 In addition to PHBs, network operators must have the ability to classify both network microflows and
14 packets based on a subset of criteria for purposes of appropriate prioritization. The system must be able to
15 classify in-profile or out-of-profile microflows that have exceeded or not met a predetermined bitrate, and
16 enforce action to include marking of diffserv field, dropping the packet(s), or delaying the packets to

17 bring the stream into compliance with the traffic profile. When and if the packets/microflows are in
18 compliance, they may be dropped into an appropriate PHB.

19 ~~<Jim Landon 8/6/03>~~

20 **4.1.16 Security (Closure Proposed)**

21 Network security in MBWA systems shall protect the service provider from theft of
22 service, the user's privacy and mitigate against denial of service attacks. Provision shall
23 be made for authentication of both base station and mobile terminal, for privacy, and for
24 data integrity consistent with the best current commercial practice. 802.20 security is
25 expected to be a partial solution complemented by end-to-end solutions at higher protocol
26 layers such as EAP, TLS, SSL, IPsec, etc.

27 **4.1.16.1 Access Control (Closure Proposed)**

28
29 ~~A cryptographic method shall be used.~~

30
31 For example a secured connection using a certificate is not considered
32 "challenge-response". Also a challenge-response is at layer 7, not
33 layer 2.

34 ~~<Change request by Alan Chickinsky 8/7/2003>~~

35 **4.1.16.2 Privacy Methods (Closure Proposed)**

36 A method that will provide message integrity across the air interface to protect user data
37 traffic, as well as signaling messages from unauthorized modification will be specified.

Formatted: Font: (Default) Arial, 8 pt

Formatted: Bullets and Numbering

Deleted: is assumed to have goals similar to those in cellular or PCS systems. These goals are to

Deleted: and to protect

Formatted: Bullets and Numbering

Deleted: A cryptographically generated challenge-response authentication mechanism for the user to authenticate the network and for the network to authenticate the user must be used.

Formatted: Bullets and Numbering

1 Encryption across the air interface to protect user data traffic, as well as signaling
2 messages, from unauthorized disclosure will be incorporated.

3 **4.1.16.3 User Privacy (Closure Proposed)**

Formatted: Bullets and Numbering

4 The system will prevent the unauthorized disclosure of the user identity.

5 **4.1.16.4 Denial of Service Attacks (Closure Proposed)**

Formatted: Bullets and Numbering

6 It shall be possible to prevent replay attacks by minimizing the likelihood that
7 authentication signatures are reused.

8 It shall be possible to provide protection against Denial of Service (DOS) attacks.

9 **4.1.16.5 Security Algorithm (Closure Proposed)**

Formatted: Bullets and Numbering

10 The authentication and encryption algorithms shall be publicly available on a fair and
11 non-discriminatory basis.

12 National or international standards bodies shall have approved the algorithms.

13 The algorithms shall have been extensively analysed by the cryptographic community to
14 resist all currently known attacks.

15 **4.2 PHY/RF (open)**

16 **4.2.1 Receiver sensitivity (Closure Proposed)**

17 Blocking and selectivity specifications shall be consistent with best commercial practice
18 for mobile wide-area terminals.

19 **4.2.2 Link Adaptation and Power Control (open)**

20 Integrate 4.3.1. (open)

21 The AI shall support automatic selection of optimized user data rates that are consistent
22 with the RF environment constraints and application requirements. The AI shall provide
23 for graceful reduction or increasing user data rates, on the downlink and uplink, as a
24 mechanism to maintain an appropriate frame error rate performance.

25 Link adaptation shall be used by the AI for increasing spectral efficiency, data rate, and
26 cell coverage reliability. The AI shall support adaptive bandwidth allocation, and
27 adaptive power allocation. The system will have adaptive modulation and coding in both
28 the uplink and the downlink

29

Deleted: <#>Handoff Support¶
Handoff methods are required in MBWA systems to facilitate providing continuous service for a population of moving Mobile Stations. Mobile stations may move between cells, between systems, between frequencies, and at the higher layer between IP Subnets. At the lowest layers, handoffs can be classified as either soft or hard handoffs, depending on whether there is a momentary service disruption or not.¶
<#>Soft Handoff¶
<#>Hard Handoff¶
<#>Hard Handoff Between Similar MBWA Systems¶
<#>Hard Handoff Between Frequencies¶
<#>IP-Level Handoff¶
Kei Suzuki Asked this be removed. Sprint would like it to be considered even though it is above level 2.¶
Version by Michael Youssefimi¶
In supporting high speed mobility in an all IP network, the MBWA air interface shall be designed in a manner that does not preclude the use of MobileIP or of SimpleIP for the preservation of IP session state as a subscriber's session is handed over from one base station or sector to another.¶
Multiple IP addresses behind one terminal may also be supported.¶
In order to support high speed mobility in an all IP network Mobile IP will have to be supported at a higher level. Integration of Foreign Agent or proxy Mobile IP into the base station or terminal will be required to support a clientless solution. Multiple IP addresses behind a single terminal shall also be supported.¶
¶

Formatted: Bullets and Numbering

Deleted: The Radio system shall provide at least 99.9 link reliability.¶

Deleted: peak

Deleted: modulation and coding, adaptive

1 **4.2.3 Performance Under Mobility & Delay Spread (open)**

2 The system is expected to work in dense urban, suburban and rural outdoor-indoor
3 environments and the relevant channel models shall be applicable. The system shall NOT
4 be designed for indoor only and outdoor only scenarios. The system should support a
5 delay spread of at least 5 micro-seconds.

6 **Rationale**

7 The maximum tolerable delay spread should be specified so that it can be determined whether various
8 vendor proposals can meet this criteria.

9 Joanne,

10
11 From my experience, the max. delay spread value is an essential
12 requirement.

13
14 The specific proposed value is resonable, and I would like to see it
15 reflected by the Channel models.

16
17 <Marianna Goldhammer 7/30/03>

18 Marianna, I do not wish to imply that there should not be numbers in the
19 requirements document. I believe that we have a fine line to walk in
20 evaluating each of the proposed requirements to make sure that

21 (a) It is a requirement on the PHY or MAC layer, and not an upper layer
22 requirement, and

23 (b) It is a primary requirement for a system which will lead to a
24 successful
25 standard and successful products, as opposed to a secondary requirement
26 derived from some primary requirement but directed toward a specific
27 implementation.

28 or (c) the requirement is necessary for interoperability.

29
30 Note that requirements that really belong to the upper layers may be
31 translated into requirements for capabilities at the MAC or PHY layers
32 to
33 support those upper layer capabilities. An example might be a special
34 address in the frame format that is required by the upper layers to
35 execute
36 a required feature.

37
38 I believe that a list of requirements document that adheres to these
39 guidelines will have significant quantitative specifications to be used
40 for
41 evaluating the various choices.

42
43 Best regards.

44
45 <Robert D. Love 7/31/03>
46

47
48 **4.2.4 Duplexing – FDD & TDD (Closure Proposed)**

49 The 802.20 standard shall support both Frequency Division Duplex (FDD) and Time
50 Division Duplex (TDD) frequency arrangements.

Deleted: Max tolerable delay spread
Deleted: u
Deleted: m
Deleted:

1 **4.3 Spectral Requirements (Closure Proposed)**

2 The system shall be targeted for use in TDD and FDD licensed spectrum allocated to
3 mobile services below 3.5GHz. The AI shall be designed for deployment within existing
4 and future licensed spectrum below 3.5 GHz. The MBWA system frequency plan shall
5 include both paired and unpaired channel plans with multiple bandwidths, e.g., 1.25 or 5
6 MHz, etc., to allow co-deployment with existing cellular systems. Channel bandwidths
7 are consistent with frequency plans and frequency allocations for other wide-area
8 systems

9 The design shall be readily extensible to wider channels as they become available in the
10 future.

11 **4.4 Layer 2 MAC (Media Access Control) (open)**

13 **4.4.1 Quality of Service and the MAC (open)**

14 Several submissions for QOS have been sent now.

15 Michael Youssefmir wrote'

16 "The 802.20 air interface shall support standard Internet Differentiated
17 Services (DS) QoS to be compatible with other mobile network standards
18 such as 3GPP2. In particular, 802.20 shall support the standard
19 Expedited Forwarding (EF), Assured Forwarding (AF), and Best Effort (BE)
20 DS Per Hop Behaviors (PHBs) as defined by the RFC 2597 and RFC 2598.
21 802.20 shall also support configuration of the PHBs by a DS API that
22 shall be based on a subset of the information model defined in RFC 3289.
23

24 The 802.20 air interface will provide an API to higher layer entities
25 for the purpose of requesting QoS attributes on a per-session basis. The
26 API will also provide a mechanism for the air interface to inform higher
27 layer entities whether a particular QoS request is to be honored. It is
28 the responsibility of higher layer entities to take appropriate action
29 based on such messages."

30 Bill Young Submitted.

31 Quality of Service and Class of Service

32
33 This section describes the quality of service and classes of services
34 for 802.20 systems. Terminology is borrowed from Internet Engineering
35 Task Force (IETF) and the IEEE 802.16.3 functional requirements.
36

37 802.20 protocols must support classes of service (COS) with various
38 quality of service guarantees. The 802.20 protocol standards must define
39 the interfaces and procedures that that facilitates the requirements for
40 the allocation and prioritization of resources. 802.20 protocols must
41 also provide the means to enforce QoS contracts and Service Level
42 Agreements (SLA). Table 1 provides a summary of the QoS requirements
43 that the PHY and MAC layers shall meet. Note that the parameters in the
44 table are measured between the MAC input and the upper layer at the
45 transmit station and the MAC output at the upper layer of the receiving
46 station for information transmission. For example, delay does not
47 include setup time, link acquisition, voice codec's, etc.

Deleted: <#>Adaptive Modulation and Coding¶
The system will have adaptive modulation in both the uplink and the downlink¶
<#>Layer 1 to Layer 2 Inter-working¶
The interface between layers 1 and 2 is not an exposed interface; it may be handled at the implementer's discretion.¶

Formatted: Bullets and Numbering

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17

For QoS based connectionless services, the 802.20 protocols must support resources negotiated on-demand. For example, the MAC protocol may allocate bursts of PDUs to services that require changes in resource allocation. Such allocation, for connectionless services, is thus performed in a semi-stateless manner.

A connection-oriented service may require state information to be maintained for the life of a connection. However, the 802.20 MAC layer interface may provide a connection-less service interface that require higher layer adaptation to maintain the state of the connection and periodically allocate resources. For instance, the MAC may need to maintain state information about the QoS data flow only for the duration of an allocation.

Table 1: Services and QoS Requirements

Service	Maximum Error Rate	Maximum Access Delay (One Way)
Full Quality Telephony (Vocoder MOS > 4.0)	BER 10 ⁻⁴	20 ms
Standard Quality Telephony (Vocoder MOS < 4.0)	BER 10 ⁻³	40 ms
Time Critical Packet Services	BER 10 ⁻⁴	20 ms
Non-time Critical Packet Services - best effort	BER 10 ⁻³	Not applicable

18
19
20

Note: These parameters should be vetted by the group.

1 Types and Classes of Service
2 The fundamental direction for the QoS model is that will be exported to
3 MBWA endpoints will be IP based and conform to IETF DiffServ QoS model
4 in conjunction with other IP based protocols. The DiffServ QoS model
5 defines traffic for all services as follows:
6
7 Expedited Forwarding (EF): EF requires a constant periodic access to
8 bandwidth. The bandwidth requirements may vary within a specific range,
9 but delay and delay variance limits are specified. Examples that fall
10 into this category are voice-over-IP (VoIP), videoconferencing, video on
11 demand (VoD) and other multimedia applications.
12 Assured Forwarding (AF): In AF the bandwidth varies within a specified
13 range, but has loose delay and delay variance requirements.
14 Applications, which are limited in their bandwidth usage, may fall in
15 this category. AF services allow the traffic to be divided into
16 different classes. Using this capability, an ISP can offer a tiered
17 services model. For example there could be four classes platinum, gold,
18 silver and bronze with decreasing levels of service quality as well as
19 maximum allocated bandwidth, with platinum getting the high share of
20 resources and bronze getting lowest. This would facilitate premium
21 priced service level agreements.
22 Best Effort Service (BES): The bandwidth varies within a wide range and
23 is allowed to burst up to the maximum link bandwidth when EF and AF
24 services are not using bandwidth. The bandwidth and delay requirements
25 may or may not be specified. Higher variations of delay may be
26 acceptable since applications that utilize BES allow for a lower grade
27 of service due to preemption by EF and AS traffic. Current Internet
28 service is an example of best effort service.
29
30
31 Traffic Shaping For Service Level agreements
32 The 802.20 protocols shall enable the provisioning and signaling of
33 parameters for the guaranteeing of minimum allocated bandwidth used by
34 applications as set by the SLA. This would be accomplished through
35 access throttling, discarding packets and dynamically assigning
36 available bandwidth. The number of service levels, data rates and
37 congestion control parameters will be called out in the 802.20
38 specifications.
39
40 Parameters
41
42 802.20 protocols shall define a set of parameters that preserve the
43 intent of the QoS parameters for all IP based services supported.
44

1 Service and QoS Mapping
 2
 3 The classes of service and QoS parameters of all services shall be
 4 translated into a common set of parameters defined by 802.20. A QoS base
 5 IP network may employ the Resource Reservation Protocol (RSVP) to signal
 6 the allocation of resources along a routed IP path. If 802.20 is to be a
 7 link in the IP network, an IWF must interface with 802.20 to negotiate
 8 resource allocation.
 9

10 The basic mechanism available from 802.20 systems for supporting QoS
 11 requirements is to allocate bandwidth to various services. 802.20
 12 protocols should include a mechanism that can support dynamically
 13 variable bandwidth channels and paths (such as those defined for IP
 14 environments).
 15

16 ~~Jim Landon submitted what is in the body before the other submissions.~~

Deleted: Sprint

17 The System MUST support grouping of transmission properties into service classes, so
 18 enabling upper layer entities and external applications can be mapped to request
 19 transmission intervals capable of exhibiting desired QoS parameters in a globally
 20 consistent manner. The QoS sub-system will adopt a "Matched Criteria" and
 21 "Enforcement" methodology, such that packets and flows characteristics being fed into
 22 the system that match a pre-defined rule set will be enforced accordingly.

23 **4.4.1.1 Cos/QoS Matched-Criteria (open)**

24 The system must be able to fingerprint ingress traffic based upon the matched criterias as
 25 defined below. The system shall be designed such that one or multiple (as many as 8)
 26 matched criterias can be placed into an enforcement policy.

27 **4.4.1.1.1 Protocol Field Mapping (open)**

Formatted: Bullets and Numbering

28 Flexible bit-based masking of multiple fields at every layer MUST be made available for
 29 purposes of identifying packets. These matched criterions include but are not limited to:

- 30 L4 Protocol field (UDP/TCP port number)
- 31 L4 Header length
- 32 L4 TCP flags
- 33 L4 TCP options (if present)
- 34 L3 Protocol field
- 35 L3 Source address/network
- 36 L3 Destination address/network
- 37 L3 Total length
- 38 L3 Fragmentation (Initial 4 bits of two-byte field)

1 L3 DiffServe/TOS field (to include ECN)

2 L2 Ethernet hardware address (two groups, 3 bytes each / entire 6 byte address)

3 L2 Ethertype

4 L2 802.1Q/p

5 L7 Unencrypted HTTP version 1.x protocol fingerprinting (desired)

6 **4.4.1.1.2 Hardware Mapping (open)**

7 The system shall be able to differentiate policies bound to groups of Mobile Stations.

8 **4.4.1.1.3 Additional Criteria (open)**

9 Additional criterion must be evaluated by both Mobile and Base Station: Ingress Flow

10 rates (source/destination IP address and port numbers) Ingress Aggregate data rates

11 Data tonnage-based L3 resource usage quotas

12 Airtime utilization-based PHY resource usage quotas

13 **4.4.1.2 CoS/QoS Enforcement (open)**

14 The following "ENFORCEMENT" actions will be available to handle matched-criteria.

15 Prioritization

16 The system must make available no less than eight node-based priority queues. Mobile

17 Nodes provisioned with the highest priority will have a more heavily weighted

18 probability for service. Conversely, Mobile Nodes provisioned for the lowest available

19 priority will only be given service if PHY/MAC resources are available.

20 Error Correction

21 Higher coding / ARQ: The system must have the ability to increase the probability of a

22 successful packet transmission.

23 Queuing

24 The system must make available no less than sixteen flow-based operator-defined priority

25 queues. Latency, priority, jitter, error-correction, maximum throughput and queue depths

26 will be considered for the development of these queues.

27 Suppression

28 Hard drop: The system MUST be able to block matched packet prior to transmission over

29 either uplink or downlink air interfaces.

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

1 **Reservation**
 2 When requested a fixed amount of bandwidth must be allocated for use. If the
 3 reservation request can't be fulfilled the MAC must signal back so it can be handled at
 4 higher layer.

5 **4.4.1.2.1 Aggregate Bandwidth Partitioning (open)**

6 Partitioning: The system must allow for partitioning of the aggregate bandwidth pipe.
 7 While the base station equipment is operating in a resource under-utilized state, any
 8 unused bandwidth must be made available to Mobile Stations requiring the resources
 9 regardless of which partition the CPE has been provisioned for (soft partitioning).

10 **4.4.1.2.2 Interface Binding (open)**

11 Policy enforcement shall be implemented on CPE packet input and base station packet
 12 output, as applicable, such that PHY/MAC resources are not unnecessarily utilized.
 13 Packet-queuing and queue-depths must be configurable for both base station WAN
 14 ingress and mobile station LAN ingress interfaces. Queue depth configuration will be
 15 available in increments of datagrams and time.

16 **4.4.1.2.3 Packet Mangling (open)**

17 Packet/Frame manipulation: IP Diffserve/TOS field modification to any predetermined
 18 operator value. For customer redirection, the destination address of IP packets shall be
 19 modified to any predetermined operator value (captive portal, acceptable usage policy
 20 violation, etc). For bridged environments, the system MUST possess the ability to
 21 modify the 802.1p priority field to any predetermined operator specified value. Marking
 22 will take place at either the Mobile or Base Station, as appropriate.

23 **4.4.1.2.4 Resource Scheduling (open)**

24 PHY/MAC resource scheduling: System must possess ability to starve a Mobile Station's
 25 resource allocation of PHY resources for an operator specified time value, with
 26 resolution of 10ms increments.

27 **4.4.1.2.5 Rate-limiting (open)**

28 Throughput rate limiting: System must allow for an endpoint node egress to be rate
 29 limited in increments of 8kbs, with classifications for peak and best-effort minimum
 30 resource allocation. During under-load conditions, unused bandwidth must be made
 31 available to satisfy active CPE bursting requirements.

32 **4.4.1.3 ARQ/Retransmission (open)**

33 The AI shall support ARQ/retransmission. The system must not induce more than 10ms
 34 latency for the retransmission of a lost block of data. Dropped data segments shall not
 35 hinder the timely delivery of any subsequent datagrams (successfully reconstructed
 36 datagrams shall not wait in queue for the reconstruction of datagrams that encountered
 37 dropped packets and are waiting to be re-sent).

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

4.4.1.3.1 End to End Latency (open)

The MAC protocol must guarantee periodic access to the medium. PHY resources dedicated for this function must not impact system goodput capacity by more than 5%. The contention access mechanism must not incur more than 15 msec system delay, excluding the time the system is in a blocking state due to over-capacity on the contention medium.

The first packet pass-through initiated by the subscriber, while the mobile station is not in an active state, must incur less than 20 msec one-way delay (inclusive of contention/access latencies). The first packet pass-through initiated by the base station, while the mobile station is not in an active state, must incur less than 20 msec one-way delay, exclusive of regular active-state latencies.

64-byte packet pass-through must comply with a maximum round trip delay of less than 20 msec, exclusive of input or output queue depth and contention delay.

4.4.1.3.2 End to End Latency Variation (open)

Contention/access delays must remain constant, regardless of the number of mobile stations already in an active state.

4.4.1.4 Protocol Support (open)

The system must support transport of variable length Internet Protocol packets ranging from 46 to 1500 bytes. Segmentation and re-assembly techniques may be used to arrange traffic on the medium.

The system must be able to support the optional suppression of any and all L2 and L3 broadcasts, as applicable, at the Mobile or Base Stations (see QoS section Matched Criteria).

The system must be capable of passing IPSec traffic (RFC2401), and as such, be capable of functioning with off-the-shelf VPN software and hardware. The system must be capable of passing additional encapsulation protocol types: GRE (RFC1701), L2TP (RFC2261), PPTP (RFC2637).

4.4.1.5 Addressing (open)

For external Mobile Stations with Ethernet adapters, the system must be capable of limiting the number of customer hardware MAC addresses learned by the Mobile Station. This value must be configurable per Mobile Station and in real-time without reboots.

4.4.1.6 Support/Optimization for TCP/IP (open)

The MAC protocol shall provide an efficient method of TCP acknowledgement transmission in such a way that does not hinder the ability of a system to deliver peak per-user capacity.

Deleted: <#>MAC Error Performance¶
The packet error rate (PER), after application of appropriate error correction mechanism (e.g., forward error correction) but before ARQ, delivered by the PHY layer to the MAC layer, must meet a requirement of 1% for tests conducted with 512 byte packets. The ratio of MAC protocol services becoming available to unavailable must e 99.9% of the time, provided the system and radios receive adequate power 100% of the time.¶
<#>Latency¶
Delays are derived from filters, frame alignment, time-slot interchange, switch processing, propagation, packetization, forward error correction, interleaving, contention/access, queue depths, or any other lapse in time associated with transmission on the wireless medium. Synchronous services, such as TCP applications or VoIP require short, predictable (i.e., constant) delay. ¶

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

In the event the Base Station terminates the last-mile IP session, the TCP stack must support Explicit Congestion Notification as defined by RFC3168. At no time will the Base Station block packets classified with the ECN flag.

4.5 Layer 3+ Support (open)

The system must support both IPv4 and IPv6.

4.5.1 Handoff Support (Closure Proposed)

Handoff methods are required in MBWA systems to facilitate providing continuous service for a population of moving Mobile Stations. Mobile stations may move between cells, between systems, between frequencies, and at the higher layer between IP Subnets. At the lowest layers, handoffs can be classified as either soft or hard handoffs, depending on whether there is a momentary service disruption or not.

4.5.1.1 Make before Break Handoff (Closure Proposed)

4.5.1.2 Break before MakeHandoff (Closure Proposed)

4.5.1.3 Make before Break Handoff Between Similar MBWA Systems (Closure Proposed)

4.5.1.4 Make before Break Handoff Between Frequencies (Closure Proposed)

4.5.1.5 IP-Level Handoff (open)

Kei Suzuki Asked this be removed. Sprint would like it to be considered even though it is above level 2.

Version by Michael Youssefmir

In supporting high speed mobility in an all IP network, the MBWA air interface shall be designed in a manner that does not preclude the use of MobileIP or of SimpleIP for the preservation of IP session state as a subscriber's session is handed over from one base station or sector to another.

Multiple IP addresses behind one terminal may also be supported.

Proposed New text

Additional items:

4.5.2 802.1Q tagging (open)

802.1Q tagging must be supported by the system (such that network egress traffic can be switched by a L2 device to the appropriate L2 termination device for managing backbone traffic or distinguishing traffic for wholesale partners in a wholesale environment).

802.1Q tagging must be supported by the system (such that network egress traffic can be switched by a L2 device to the appropriate L2 termination

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Formatted: Font: 12 pt, English (U.K.)

Formatted: Normal

Formatted: Font: Helvetica

Formatted: Heading 3,h3,3,H3

Formatted: Font: Helvetica

1 device for managing backbone traffic or distinguishing traffic for
 2 wholesale partners in a wholesale environment). CPE software upgrade
 3 .push. . an operator should have the ability to .push. a software
 4 upgrade to CPE that are currently connected to the network. The packets
 5 that make up the software image should be given a very high priority and
 6 should be coded heavily such that they have a very high chance of
 7 arriving error free at the CPE. The CPE should be capable of holding 2
 8 software loads (the existing one and a new one) such that an operator
 9 can ensure that the .new. software load has arrived safely at the CPE
 10 before deciding to switch from the .old. software load to the .new.
 11 software load.

12 Rationale

13 It is very important for operators to be able to manage traffic on the
 14 backbone for different customer types (business vs. residential) or to
 15 enter into wholesale arrangements whereby the wholesale partner provides
 16 the CPE to the end user, but the network is owned and maintained by the
 17 operator. In this scenario, the operator needs to have the ability to
 18 separate traffic from CPE belonging to each wholesale partner and direct
 19 that traffic to each wholesale partner independently. It is very
 20 important (particularly during the early deployment stage) that
 21 operators have the ability to .push. out new software loads to CPE
 22 quickly and efficiently to ensure network element software upgrades can
 23 efficiently coincide with user CPE software upgrades

24
25
26
27
28 <Mike Youssefari 8/1/03>

29
30 Given the unspecified nature of the network architecture in which a .20
 31 air-interface would plug in and the number of ways by which different
 32 users' traffic can be partitioned at Base Stations/other elements in the
 33 network infrastructure, its not clear if specifically using 802.1Q VLAN
 34 tags ought to be a requirement, particularly a binding one. So I would
 35 second Mike'e suggestion to not have it so.

36
37 Regarding software push, software loads etc, since these pertain more
 38 generally to the management/admin of the user terminal and not to the
 39 desired behavior of the MAC/PHY itself, we should not be specifying them
 40 in this requirements document. Regards,

41
42 <Samir 8/3/03>
43
44

45
46 4.5.3 CPE software upgrade “push” (Closure Proposed)

47 CPE software upgrade “push” – an operator should have the ability to “push” a software
 48 upgrade to CPE that are currently connected to the network. The packets that make up
 49 the software image should be given a very high priority and should be coded heavily such
 50 that they have a very high chance of arriving error free at the CPE. The CPE should be
 51 capable of holding 2 software loads (the existing one and a new one) such that an
 52 operator can ensure that the “new” software load has arrived safely at the CPE before
 53 deciding to switch from the “old” software load to the “new” software load.

Formatted: Font: Helvetica
 Formatted: Heading 3,h3,3,H3
 Formatted: Font: Helvetica

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31

Rationale

It is very important for operators to be able to manage traffic on the backbone for different customer types (business vs. residential) or to enter into wholesale arrangements whereby the wholesale partner provides the CPE to the end user, but the network is owned and maintained by the operator. In this scenario, the operator needs to have the ability to separate traffic from CPE belonging to each wholesale partner and direct that traffic to each wholesale partner independently.

It is very important (particularly during the early deployment stage) that operators have the ability to “push” out new software loads to CPE quickly and efficiently to ensure network element software upgrades can efficiently coincide with user CPE software upgrades.

<Neka Hicks 7/29/03

4.5.4 OA&M Support (Closure Proposed)

The following values must be made available in real-time with redisplay intervals of no less than 1000 msecs, with the option to be displayed in both cumulative and delta modes:

- Aggregate base station bytes served at each coding/modulation configuration
- Correctable and uncorrectable block errors
- Identity of specific Mobile Stations which exhibit a higher than average packet error rate
- PHY/MAC/NET based usage consumption statistics per Mobile Station
- Successful and failed service requests for both up and downlink directions
- Unique number of active Mobile Stations, as well as which specific stations are active, for both up and downlink directions
- Number of ungraceful session disconnections

Proposed New text

Additional statistics to be provided:

- Signal strength per user (UL and DL)
- Interference level or C/I per user (UL and DL)
- Bit Error Rate or Block Error Rate per user (UL and DL) for both traffic and signaling information

Formatted: Bullets and Numbering

Formatted: Underline

Formatted: Body Text

1 Aggregate percent resource space utilization (UL and DL) per sector. Resource space
2 should include time slots, codes, tones, etc.

3 ID of sector serving each user

4 Effective Noise Floor seen at the BTS (should rise with increased levels of interference)

5 Effective Throughput per user (DL/UL)

6 Interface statistics (RFC1213); SNMP OID group 1.3.6.1.2.1.2.2

8 These statistics should be made available via the SNMP (Simple Network Management
9 Protocol) standard. It is recommended that these statistics also be available using an
10 EMS developed by each specific vendor.

11 **Rationale**

12 These statistics will need to be available for an operator to have the appropriate amount of visibility into
13 network and customer related problems. The statistics need to be made available using the SNMP standard
14 so that any SNMP based network management solution may be used to gather such statistics.

15 <Neka Hicks 7/29/03>

16 [Redacted]
17 **4.5.5 MAC Complexity Measures (open)**

18 To make the MBWA technology commercially feasible, it is necessary the complexity is minimized at the
19 MAC, consistent with the goals defined for the technologies. This section defines complexity measures to
20 be used in estimating MAC complexity.

21 Action: Delete this section

22
23 Reason: MAC complexity measures should not be addressed by this
24 requirements document. Our driving goal must be to achieve the
25 performance of the PAR. Complexity measures even, if they could be
26 articulated in this document, are not relevant when compared to the
27 overriding goal of achieving performance for data.

28 <John Fan 7/23/03>

29 **4.5.6 Call Blocking**

30 When the bandwidth required for a call cannot be reserved, the system will provide
31 signaling to support call blocking.

32 **Comment**

33 Rationale: The sentence related to call blocking should be removed
34 because call blocking is an application layer specific issue. The
35 Requirements document should specify the classes of supported QoS, but
36 application-specific exception handling should not be included in the
37 document.
38

Deleted: <#>Scheduler ¶
The AI specification shall not preclude proprietary scheduling algorithms, so long as the standard control messages, data formats, and system constraints are observed.¶
Formatted: Bullets and Numbering

Formatted: Font color: Red
Formatted: Heading 3,h3,3,H3, Pattern: Clear (Gray-25%)

1 Call blocking or other exception handling techniques should be handled
2 at a higher layer for any application that requires special QoS
3 treatment. If there is an application (such as VoIP) that requires
4 special QoS treatment, the application shall request it of the air
5 interface via an API. If the air interface cannot provide the desired
6 QoS, it shall inform the application of that fact via the API. It is up
7 to the application to take the appropriate action, e.g., "blocking" the
8 call.

9 <John Fan 7/23/03>

10 This section was moved to layer 3 + Support based on the discussion at the Plenary in
11 July.

12 Current text "When the bandwidth required for a call cannot be reserved, the system will
13 provide signaling to support call blocking."

14 Proposed Change

15 When MAC/PHY resources cannot be allocated to support the QoS characteristics
16 defined as "high priority bandwidth reserved" are not available the MAC/PHY API will
17 provide messaging to the higher layer to support blocking. Example VOIP allowing the
18 higher layer application to provide a busy signal blocking the call and providing
19 feedback. The QoS must allow the assignment of specific resources to the QoS class so
20 that the MAC/PHY may make this determination.

21 Reasoning

22 Certain types of traffic like VOIP, Streaming Video, etc. require committed resources to
23 function correctly. It is important that the MAC/PHY have the ability to support them at
24 a higher layer. The QoS section needs to be able to provide bandwidth

25 <David McGinniss 8/6/03>

26 **4.6 Scheduler (Closure Proposed)**

27 The AI specification shall not preclude proprietary scheduling algorithms, so long
28 as the standard control messages, data formats, and system constraints are
29 observed.

30 -----

31 **4.7 User State Transitions (Closure Proposed)**

32 The AI shall support multiple protocol states with fast and dynamic transitions among
33 them. It will provide efficient signaling schemes for allocating and de-allocating
34 resources, which may include logical in-band and/or out-of-band signaling, with respect
35 to resources allocated for end-user data. The AI shall support paging polling schemes for
36 idle terminals to promote power conservation for MTs.

Formatted: Font color: Auto
Formatted: Body Text, Pattern: Clear

Formatted: Bullets and Numbering
Formatted: No underline
Formatted: Heading 2,H2,heading 2

Deleted: \

Formatted: Bullets and Numbering

1 **4.8 Resource Allocation (Closure Proposed)**

Formatted: Bullets and Numbering

2 The AI shall support fast resource assignment and release procedures on the uplink and
3 Duplexing – FDD & TDD

4 **5 References (open)**

- 5
- 6 • 802.20 - PD-02: Mobile Broadband Wireless Access Systems: Approved PAR
7 (02/12/11)
 - 8 • 802.20 - PD-03: Mobile Broadband Wireless Access Systems: Five Criteria (FINAL)
9 (02/11/13)
 - 10 • C802.20-03/45r1: Desired Characteristics of Mobile Broadband Wireless Access Air
11 Interface ([Arif Ansari](#), [Steve Dennett](#), [Scott Migaldi](#), [Samir Kapoor](#), [John L. Fan](#),
12 [Joanne Wilson](#), [Reza Arefi](#), [Jim Mollenauer](#), [David S. James](#), [B. K. Lim](#), [K.](#)
13 [Murakami](#), [S. Kimura](#) (2003-05-12))
 - 14 • C802.20-03/47r1: Terminology in the 802.20 PAR (Rev 1) ([Joanne Wilson](#), [Arif](#)
15 [Ansari](#), [Samir Kapoor](#), [Reza Arefi](#), [John L. Fan](#), [Alan Chickinsky](#), [George Iritz](#), [David](#)
16 [S. James](#), [B. K. Lim](#), [K. Murakami](#), [S. Kimura](#) (2003-05-12))

1 **Appendix A** **Definition of Terms and Concepts**

- 2 • *Active users* - An active user is a terminal that is registered with a cell and is using or
3 seeking to use air link resources to receive and/or transmit data within a short time
4 interval (e.g., within 100 ms).

- 5 • *Airlink MAC Frame RTT* - The round-trip time (RTT) over the airlink for a MAC data
6 frame is defined here to be the duration from when a data frame is received by the
7 physical layer of the transmitter to the time when an acknowledgment for that frame
8 is received by the transmitting station.

- 9 • *Bandwidth or Channel bandwidth* - Two suggested bandwidths are 1.25 MHz and 5
10 MHz, which correspond to the bandwidth of one channel (downlink or uplink) for
11 paired FDD spectrum.

- 12 • *Cell* - The term “cell” refers to one single-sector base station or to one sector of a
13 base station deployed with multiple sectors.

- 14 • *Cell sizes* – The maximum distance from the base station to the mobile terminal over
15 which an acceptable communication can maintained or before which a handoff would
16 be triggered determines the size of a cell.

- 17 • *Frequency Arrangements* – The frequency arrangement of the spectrum refers to its
18 allocation for paired or unpaired spectrum bands to provide for the use of Frequency-
19 Division Duplexing (FDD) or Time-Division Duplexing (TDD), respectively. The
20 PAR states that the 802.20 standard should support both these frequency
21 arrangements.

- 22 • *Interoperable* – Systems that conform to the 802.20 specifications should interoperate
23 with each other, e.g., regardless of manufacturer. (Note that this statement is limited
24 to systems that operate in accordance with the same frequency plan. It does not
25 suggest that an 802.20 TDD system would be interoperable with an 802.20 FDD
26 system.)

- 27 • *Licensed bands below 3.5 GHz* – This refers to bands that are allocated to the Mobile
28 Service and licensed for use by mobile cellular wireless systems operating below 3.5
29 GHz.

- 30 • *MAN* – Metropolitan Area Network.

- 31 • *Mobile Broadband Wireless Access systems* – This may be abbreviated as MBWA
32 and is used specifically to mean “802.20 systems” or systems compliant with an
33 802.20 standard.

- 34 • *Optimized for IP Data Transport* – Such an air interface is designed specifically for
35 carrying Internet Protocol (IP) data traffic efficiently. This optimization could involve

1 (but is not limited to) increasing the throughput, reducing the system resources
2 needed, decreasing the transmission latencies, etc.

3 • *Peak aggregate data rate per cell* – The peak aggregate data rate per cell is the total
4 data rate transmitted from (in the case of DL) or received by (in the case of UL) a
5 base station in a cell (or in a sector, in the case of a sectorized configuration),
6 summed over all mobile terminals that are simultaneously communicating with that
7 base station.

8 • *Peak data rates per user (or peak user data rate)* – The peak data rate per user is the
9 highest theoretical data rate available to applications running over an 802.20 air
10 interface and assignable to a single mobile terminal. The peak data rate per user can
11 be determined from the combination of modulation constellation, coding rate and
12 symbol rate that yields the maximum data rate.

13 • *Insert sector definition replace cell with sector where appropriate as commented on*
14 *the exploder.*

Formatted: Bullets and Numbering

15 • *Spectral efficiency* – Spectral efficiency is measured in terms of bits/s/Hz/cell. (In the
16 case of a sectorized configuration, spectral efficiency is given as bits/s/Hz/ sector.)

17 • *Sustained spectral efficiency* – Sustained spectral efficiency is computed in a network
18 setting. It is defined as the ratio of the expected aggregate throughput (bits/sec) to all
19 users in an interior cell divided by the system bandwidth (Hz). The sustained spectral
20 efficiency calculation should assume that users are distributed uniformly throughout
21 the network and should include a specification of the minimum expected data
22 rate/user.

23 • *Sustained user data rates* – Sustained user data rates refer to the typical data rates that
24 could be maintained by a user, over a period of time in a loaded system. The
25 evaluation of the sustained user data rate is generally a complicated calculation to be
26 determined that will involve consideration of typical channel models, environmental
27 and geographic scenarios, data traffic models and user distributions.

28 • *Targets for 1.25 MHz channel bandwidth* – This is a reference bandwidth of 2 x 1.25
29 MHz for paired channels for FDD systems or a single 2.5 MHz channel for TDD
30 systems. This is established to provide a common basis for measuring the bandwidth-
31 dependent characteristics. The targets in the table indicated by the asterisk (*) are
32 those dependent on the channel bandwidth. Note that for larger bandwidths the
33 targets may scale proportionally with the bandwidth.

34 • *Various vehicular mobility classes* – Recommendation ITU-R M.1034-1 establishes
35 the following mobility classes or broad categories for the relative speed between a
36 mobile and base station:

- 37 ○ Stationary (0 km/h),
- 38 ○ Pedestrian (up to 10 km/h)

- 1 ○ Typical vehicular (up to 100 km/h)
- 2 ○ High speed vehicular (up to 500 km /h)
- 3 ○ Aeronautical (up to 1 500 km/h)
- 4 ○ Satellite (up to 27 000 km/h).
- 5

1 **Appendix B** **Unresolved issues**

2 Coexistence and Interference Resistance

3 Since MBWA technology will be operative in licensed bands some of which are currently being utilized by
4 other technologies, it is important that coexistence and interference issues be considered from the outset,
5 unlike the situation in unlicensed spectrum where there is much more freedom of design. Of particular
6 interest is adjacent channel interference; if MBWA is deployed adjacent to any of a number of
7 technologies, the development effort should evaluate potential effects.

8 Interference can be grouped as co-channel and adjacent channel interference; evaluation of all
9 combinations of technologies likely to be encountered should be part of the 802.20 processes.
10 Furthermore, 802.20 technology is described in the PAR to encompass both TDD and FDD techniques.
11 These should be evaluated separately, and requirements provided below.

12 • 5.1 Coexistence Scenarios

13 • FDD Deployments

14 • In this section, scenarios should be developed with 802.20 deployed as FDD,
15 following the FDD “rules” for each of the 2G and 3G technologies likely to be
16 encountered in practice.

17 •

18 • 802.20 and AMPS

19 • 802.20 and IS-95

20 • 802.20 and GSM

21 • 802.20 and LMR

22 • 802.20 and CDMA2000

23 • 802.20 and WCDMA

24 • 802.20 and 1xEVDO

25 • 802.20 and HSDPA

26 • 802.20 and 1xEV/DV

27 • 5.1.2 TDD Deployments

28 • In this section, scenarios should be developed with 802.20 deployed as TDD,
29 following any TDD “rules” for each of the 2G and 3G technologies likely to be
30 encountered in practice. Since the majority of existing technologies are deployed as

1 FDD solutions, some new ground is being explored here, and it will be necessary to
2 make sure that the 802.20 technology will not seriously impact the existing services.

- 3 • 802.20 and AMPS
- 4 • 802.20 and IS-95
- 5 • 802.20 and GSM
- 6 • 802.20 and LMR
- 7 • 802.20 and CDMA2000
- 8 • 802.20 and WCDMA
- 9 • 802.20 and 1xEVDO
- 10 • 802.20 and HSDPA
- 11 • 802.20 and 1xEV/DV
- 12 • Adjacent Channel Interference
- 13 • Definitions and Characteristics
- 14 • Requirements
- 15 • Co-channel Interference
- 16 • Definitions and Characteristics
- 17 • Requirements
- 18 • TDD Interference in Traditionally FDD Bands
- 19 • Since 802.20 is listed as being both TDD and FDD, it should be evaluated in a
20 scenario where TDD 802.20 technology is deployed in a traditionally FDD frequency
21 band. 802.20 should develop appropriate scenarios and requirements so that the new
22 technology meets all necessary coexistence requirements that may be placed upon it.
- 23 • Definition and Characteristics
- 24 • Requirements
- 25 Interworking: *The AI should support interworking with different wireless access systems,*
26 *e.g. wireless LAN, 3G, PAN, etc. Handoff from 802.20 to other technologies should be*
27 *considered and where applicable procedures for that hand-off shall be supported.*[Dan
28 Gal dgal@lucent.com]: This issue is quite **critical** to the successful deployment of 802.20 systems in

1 existing and future markets worldwide. The purpose of defining Coexistence requirements in this
2 document is to assure that 802.20 systems would not cause interference to or be susceptible to interference
3 from other wireless systems operating in the same geographical area. Detailed quantitative RF emission
4 limits need to be specified as well as received interference levels that the 802.20 receivers would have to
5 accept and mitigate.

6 **System Context Diagram needed**

7 This section presents a high-level context diagram of the MBWA technology, and how
8 such technology must “fit into” the overall infrastructure of the network. It shall include
9 data paths, wired network connectivity, AAA functionality as necessary, and inter-system
10 interfaces. Major System Interfaces shall be included in this diagram.

11

12 **5.1.1 MBWA-Specific Reference Model (open)**

13 To facilitate a layered approach, the 802.20 specification shall incorporate a reference
14 partitioning model consisting of the MAC and PHY. This layered approach shall be
15 generally consistent with other IEEE 802 standards and shall remain generally within the
16 scope of other IEEE 802 standards as shown in figures 1 & 2.


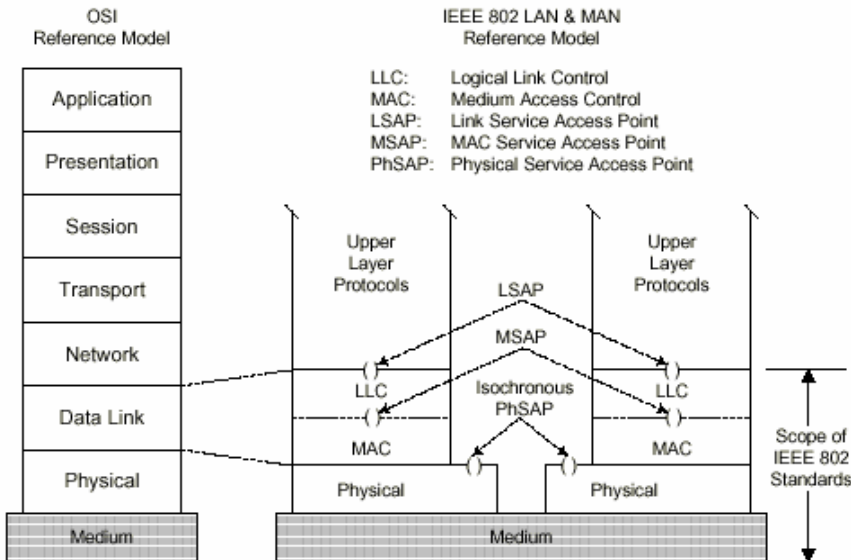


Figure 1—IEEE 802 RM for end stations (LAN&MAN/RM)

17

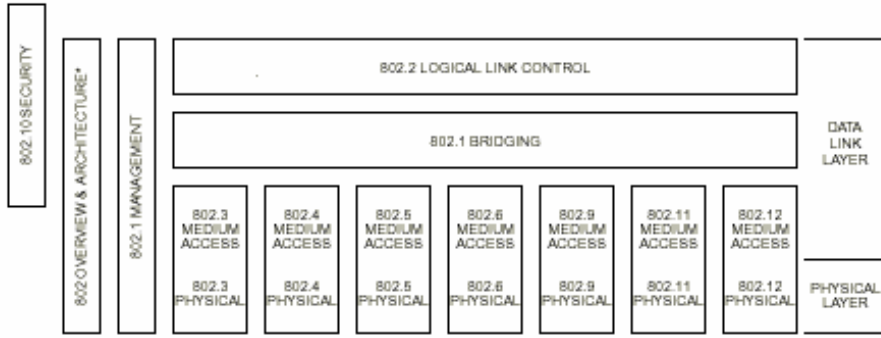

* Formerly IEEE Std 802.1A.

1

2


3 Call blocking is at higher level David McGinniss would like to se it included as a
4 comment even though the higher level will make the decision the MAC must be able to
5 support the higher level function.

Deleted: Sprint

6 When the bandwidth required for a call cannot be reserved, the system will provide signaling to support
7 call blocking.

8

9 **2. Interworking**

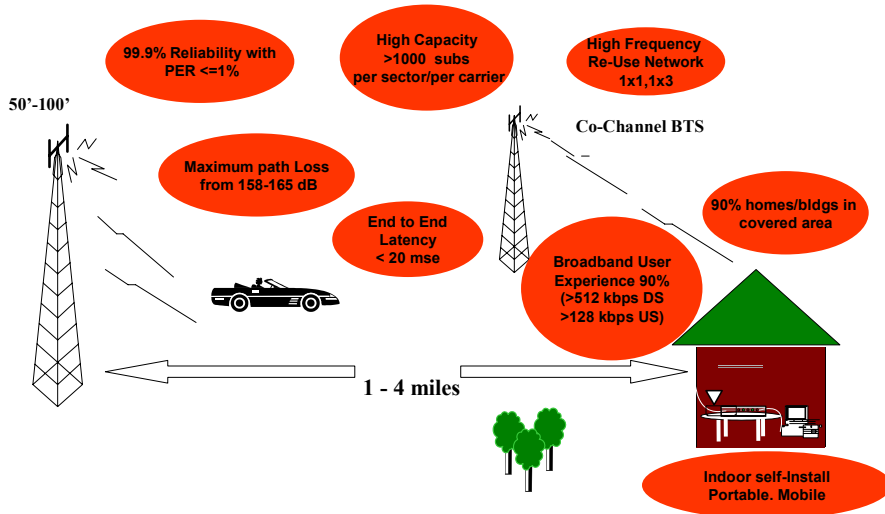

- 1 | [Dan Gal dgal@lucent.com]: Interworking between 802.20 systems and other wireless systems is highly
- 2 | desirable and may give it a competitive edge. Systems that have disparate physical layers can still
- 3 | interwork via the higher protocol layers. Current interworking solutions exist for CDMA2000/802.11b and
- 4 | for GSM-GPRS/802.11b. Multi-mode devices, such as 802.11b+802.11a or more recently, 802.11b/g are
- 5 | now available. Existing applications (such as Windows XP mobility support) provide for transparent
- 6 | roaming across systems, automatically handling the applications' reconfiguration so as to keep sessions
- 7 | working seamlessly.

- 8 | Building support for interworking in 802.20 – right from the first release of the standard – would add
- 9 | significantly to its market appeal.

1 To aid the discussion in this document and in the 802.20 specifications, a straw man
2 Reference Partitioning of the 802.20 functionality is shown in Figure 1. This reference
3 partitioning model is similar to those used in other 802 groups.


4 The 802.20 reference model consists of two major functional layers, the Data Link Layer
5 (DLL) and the Physical Layer (PHY).

6 The Data Link Layer is functionally responsible for a mobile station's method of gaining
7 access to the over-the-air resource. The Data Link Layer consists of the MAC Sub layer,
8 and the MAC Management Sub layer. The MAC Sub layer is responsible for the proper
9 formatting of data, as well as requesting access to the over-the-air resource. The MAC
10 Management Sub layer is responsible for provisioning of MAC Layer Parameters and the
11 extraction of MAC monitoring information, which can be of use in network management.

12 The Physical Layer consists of the Physical Layer Convergence Protocol, the Physical
13 Medium Dependent, and the Physical Layer Management Sub layers. The Physical
14 Layer Convergence Protocol Sub layer is responsible for the formatting of data received
15 from the MAC Sub layer into data objects suitable for over the air transmission, and for
16 the deformatting of data received by the station. The Physical Medium Dependent Sub
17 layer is responsible for the transmission and reception of data to/from the over-the-air
18 resource. The Physical Layer Management sub layer is responsible for provisioning of
19 the Physical Layer parameters, and for the extraction of PHY monitoring information that
20 can be of use in network management.

21

22

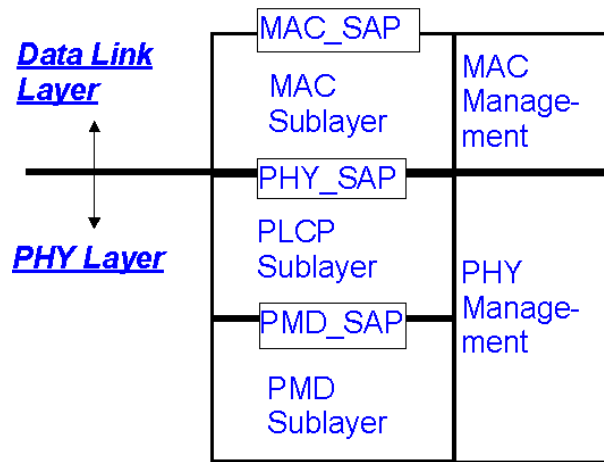

MAC_SAP: MAC Service Access Point
PHY_SAP: PHY Service Access Point
PLCP: PHY Layer Convergence Protocol, contains FEC
PMD: Physical Medium Dependent (radio)

- 1
- 2
- 3
- 4
- 5

Figure 1 – Reference partitioning

{May 29, 2003}

IEEE P802.20-PD<number>/V<number>

1

2

3