

|                              |   |                          |
|------------------------------|---|--------------------------|
| Project                      | <b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >  |                          |
| Title                        | <b>A frame structure for share RS in IEEE 802.16j Multi-hop Relay Network</b>   |                          |
| Date Submitted               | <b>2007-4-10</b>  |                          |
| Source(s)                    | LiuQiaoyan, ZhaoLu, YuQixing  | liu.qiaoyanxa@zte.com.cn |
|                              | ZTE Corporation   | zhao.lu@zte.com.cn       |
|                              |   | yu.qiuxingxa@zte.com.cn  |
| Re:                          | IEEE 802.16j-07/007r2:“Call for Technical Comments and Contributions regarding IEEE Project 802.16j”  |                          |
| Abstract                     | This contribution proposes a frame structure for share RS in IEEE 802.16j MR network.   |                          |
| Purpose                      | For TG members to adopt the proposed messages and the supporting text into the IEEE 802.16j baseline document.  |                          |
| Notice                       | This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) Reserved (s) the right to add, amend or withdraw material contained herein.  |                          |
| Release                      | The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE’s name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE’s sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.  |                          |
| Patent Policy and Procedures | The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >. |                          |

## **A frame structure for shared RS in IEEE 802.16j Multi-hop Relay Network**

### **Introduction**

In some scenarios, the multi-hop relay system comprises anchor BS and subordinate BS with a shared RS to enhance coverage, throughput and system capacity. However, the frame structures of MMR system with shared RSs have not been defined in the baseline IEEE802.16j-06/026r2. This contribution proposes a frame structure for shared RSs in IEEE 802.16j Multi-hop Network.

## Details

The following assumptions are made:

- 1- The RS can relay messages in current frame for both anchor BS and subordinate BS.
- 2- The RS is positioned in the overlapping service area of BS1 and BS2.
- 3- Both BS1 and BS2 have MR capability (MR-BS1 and MR-BS2).
  - Frame of both MR-BS1 and MR-BS2 are synchronized.

## Shared RS system for MR

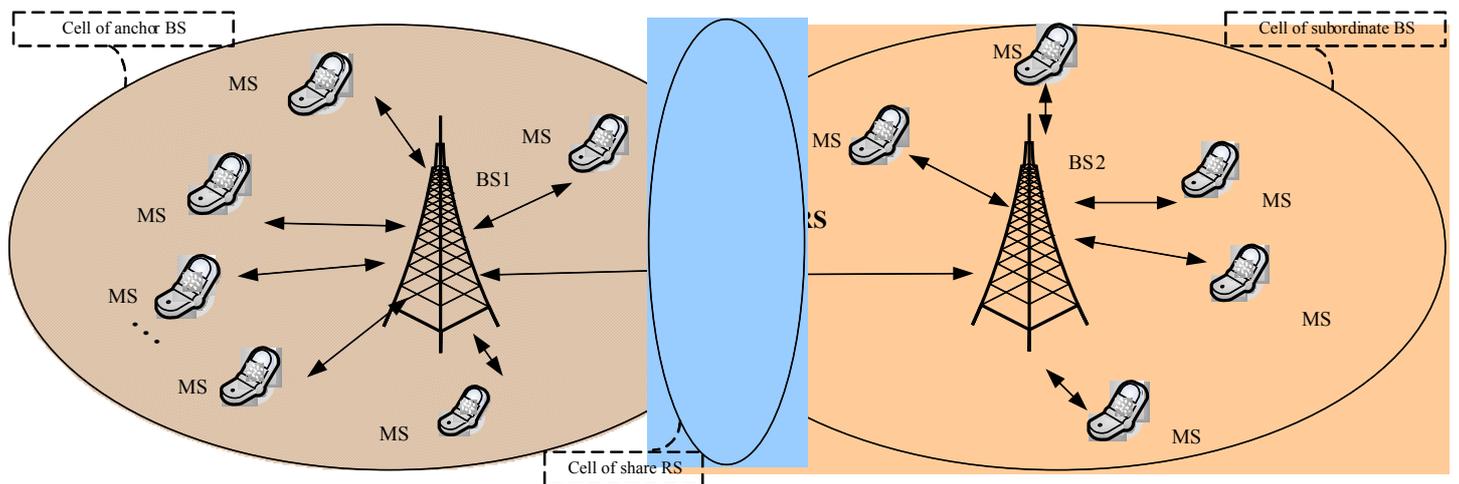


Fig. 1 MMR system with shared RSs

As shown in Fig.1, the shared RS system can be considered in 802.16j aware networks. The system provides load-balancing between the two adjacent cells, optimizes the RS bandwidth throughput and also improves the network reliability.

In the shared RS system, one RS could be connected to two or more MR-BS within the same frame. Each service flow from a mobile station is relayed to the related MR-BS by RS.

As shown in Fig.2, the frame structure with shared RS system can be considered in 802.16j network, the system provides load-balancing between two adjacent cells and improves spectral efficiency.

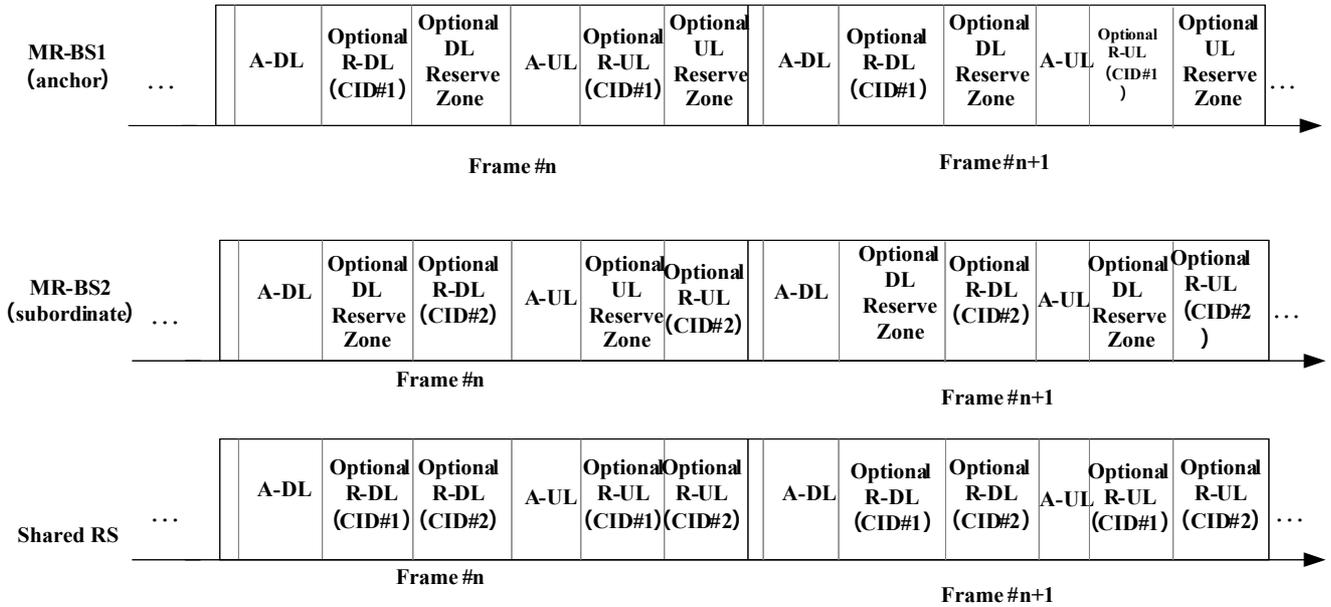


Fig.2 shared RS system for MMR.

The resource after A-DL and Optional R-DL/UL(CID#1) in DL subframe in anchor BS can be allocated idle or Optional DL/UL Access Zone. For convenience, it is called Optional DL/UL Reserved d Zone.

The resource between A-DL /UL and Optional R-DL/UL(CID#2) in DL subframe in subordinate BS can be allocated idle or Optional DL/UL Access Zone. For convenience, it is called Optional DL/UL Reserved d Zone.

The Optional DL/UL Reserved d Zone shall be used by the following principle:

- If anchor BS Optional R-DL/UL were not selected, Optional DL/UL Reserved d Zone in subordinate BS should not be selected too. They appear concurrently.
- If subordinate BS Optional R-DL/UL were not selected, Optional DL/UL Reserved d Zone in anchor BS should not be selected too. They appear concurrently.
- If the load in anchor BS is not very heavy, the Optional DL/UL Reserved d Zone should be allocated to idle state. On the contrary, the Optional DL/UL Reserved d Zone should be allocated to Optional DL/UL Access Zone. In subordinate BS is the same.

## Resource allocation method in shared RS system

In order to realize a shared RS mode of operation, the scheduler of the MR-BS is required to take into account the collision avoidance. The scheduling mechanism itself and its implementation in the RS are beyond the scope of the 802.16j standard. However the MR-BS and the RS that support a shared RS mode of operation are required to comply with the following rules.

- Each MR-BS needs to schedule a resource allocation avoiding allocating the same resource simultaneously to RS.

- Each MR-BS should use different interval exclusively in same frame for the same shared RS without any collision.

If BSs use frequency re-use pattern (1,3,3) and (1,3,1/3), there has no interference. The Reserved d Zone allocated to DL/UL Access Zone adapts to all MSs. However, if BSs use frequency re-use pattern (1,3,1), there exists interference between shared RS communicating with one BS and some MSs communicating with the other BS. In this case, MSs need to be classified into two parts. DL/UL Access Zone can be allocated to all MSs, Optional DL/UL Access Zone can only be allocated to part of MSs. The part of MSs communicating with the related MR-BS should not affect heavily shared RS communicating with other MR-BS if same frequency resource at the same time is used.


### Proposed text changes

[Insert section 8.4.4.7.3 “Frame structure for shared RS mode” as indicated:]

#### 8.4.4.7.3 Frame structure for shared RS mode

This section describes the minimal requirements for an in-band frame structure for anchor BS, subordinate BS and the shared RS.

Figure <xxx> Example of configuration for shared RS mode

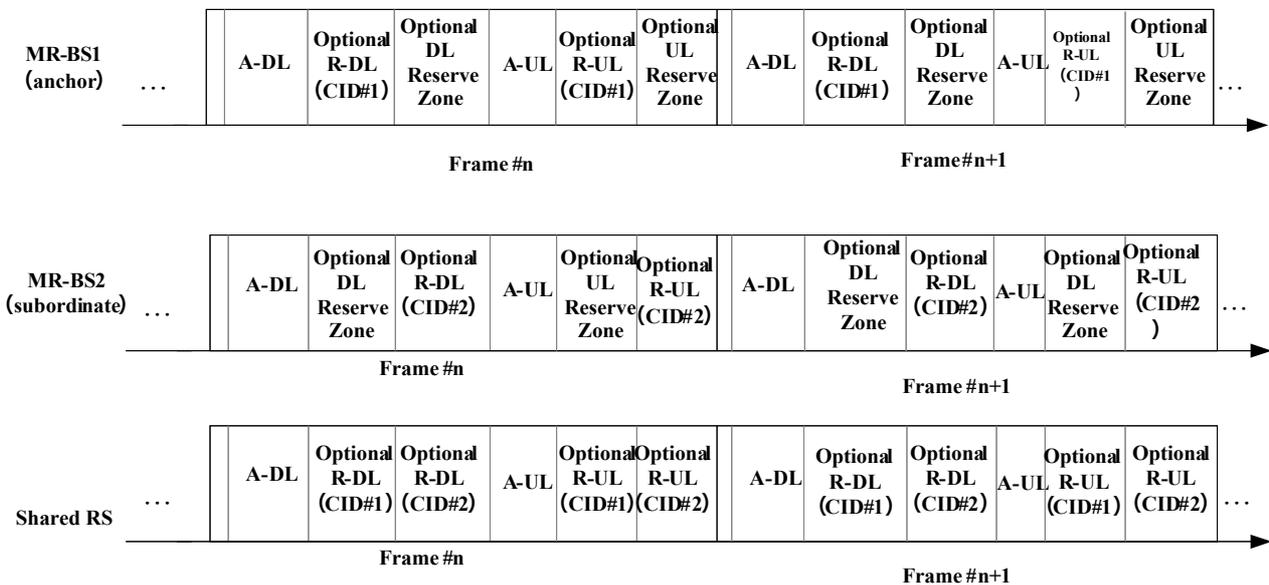

#### 8.4.4.7.3.1 Frame structure for anchor BS

For the TDD mode, an example of the anchor BS frame structure is shown in Figure <xxx>.

The frame structure consists of DL sub-frame period and UL sub-frame period. Each frame in the downlink starts with a preamble followed by FCH, DL MAP and possibly UL MAP. The DL sub-frame shall include at least one DL Access Zone and possibly one DL Relay Zone and possibly one DL Reserved Zone. The UL sub-frame shall include one UL Access Zone and may include one optional UL Relay Zone

and one optional UL Reserved Zone. DL/UL Reserve Zone may be used in idle or Access Zone mode. In each frame, the TTG shall be inserted between the DL sub-frame and UL sub-frame. The RTG shall be inserted at the end of each frame.

#### 8.4.4.7.3.2 Frame structure for subordinate BS

For the TDD mode, an example of the subordinate BS frame structure is shown in Figure <xxx>.

The frame structure consists of DL sub-frame period and UL sub-frame period. Each frame in the downlink starts with a preamble followed by FCH, DL MAP and possibly UL MAP. The DL sub-frame shall include at least one DL Access Zone and possibly one DL Relay Zone and possibly one DL Reserved Zone. The UL sub-frame shall include one UL Access Zone and may include one optional UL Reserved Zone and one optional UL Relay Zone. DL/UL Reserve Zone may be used in idle or Access Zone mode.

In each frame, the TTG shall be inserted between the DL sub-frame and UL sub-frame. The RTG shall be inserted at the end of each frame.

#### 8.4.4.7.3.3 Frame structure for shared RS

For the TDD mode, an example of the shared RS frame structure is shown in Figure <xxx>.

The frame structure consists of DL sub-frame period and UL sub-frame period. Each frame in the downlink starts with a preamble followed by an FCH, DL MAP and possibly UL MAP. The DL sub-frame shall include at least one DL Access Zone and two optional UL Relay Zones. The UL sub-frame shall include one UL Access Zone and may include two optional UL Relay Zones.

In each frame, the TTG shall be inserted between the DL sub-frame and UL sub-frame. The RTG shall be inserted at the end of each frame. The R-TTG or R-RTG shall be inserted between transmission and reception mode in DL sub-frame and UL sub-frame.

## I. References

[1] IEEE802.16e-2005

[2] C802.16j-07/026r2, Baseline Document for Draft Standard for 16j

[3] C802.16j-07/006r1, A proposal for introducing a shared RS system in MR

2007-4-10

802.16j-07/279r1