


Cooperative RS Transmission Scheme on IEEE 802.16j

**DoCoMo Beijing Labs
Nov. 2006**


Introduction

- Cooperative transmission can increase network capacity by using distributed MIMO technologies
- The key problems to implement cooperative transmission in the MMR system
 - How to deal with asynchrony among the transmission from cooperative RSs to the SS/MS
 - How to determine which and how many RSs involved in the cooperative transmission

Usage Scenario

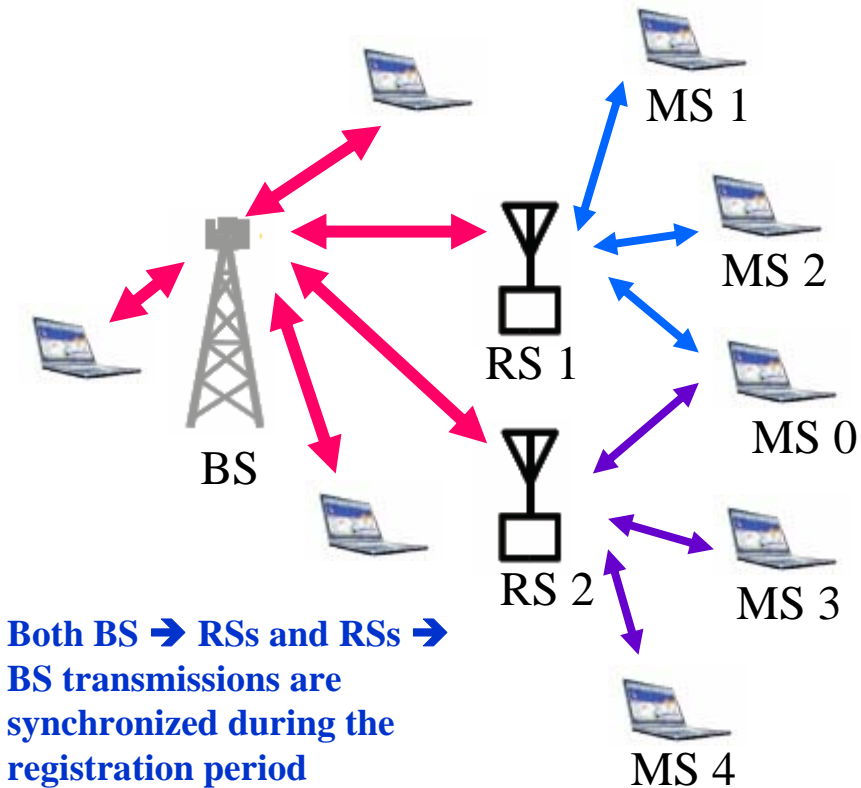

- Directly connected to BS
- Connected to RS1
- Connected to RS2

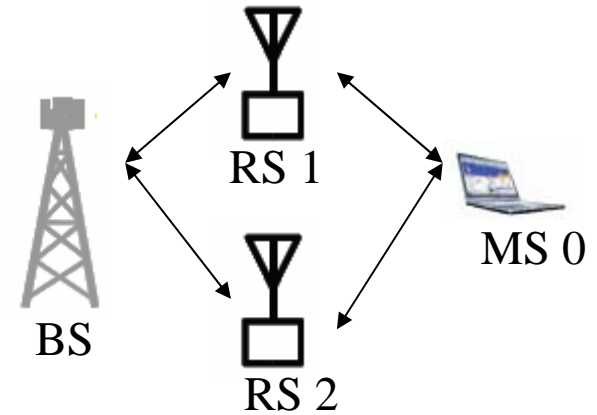

Using the proposed method, RS1 and RS2 cooperatively communicate with BS and MS 0.

Simultaneously, RS1 also relays for MS1 and MS2; RS2 also relays for MS3 and MS4.

Proposed Cooperative RS Transmission

Step 1 (Connection Step):

- Gather information of the received SNR and transmission delay of all possible relay nodes
 - ① In the downlink sub-frame add a cooperative indicator (CI)
 - ② $RS_i \rightarrow MS/SS$ forward the packet at T_{i0}
 - ③ MS/SS records the received time from each RS_i , T_{i1} , and measures the received SNR_{i1}
 - ④ $MS/SS \rightarrow RS_i$ sends back a control packet at T_{i2} including $SNR_{i1}, (T_{i2} - T_{i1})$
 - ⑤ RS_i records the received time T_{iE}
 - ⑥ $RS_i \rightarrow BS$ forwards the packet adding $(T_{iE} - T_{i0})$
 - ⑦ BS measures the received SNR_{i2}

$$\text{Delay } i1 = [(T_{iE} - T_{i0}) - (T_{i2} - T_{i1})] / 2$$

CI: suggested to use 2 bits. (00: No; 11: Yes; 01 and 10 are reserved)

Proposed Cooperative RS Transmission

Step 2(Selection Step):

- BS makes decision on whether cooperative transmission will be executed and which relay nodes are involved in the transmission

- i. Initially select all the RSs that can satisfy

$$\begin{cases} SNR_{i1} \geq A * S_1 \\ SNR_{i2} \geq A * S_2 \end{cases} \quad 0 < A < 1$$

$$S_1 = \max(SNR_{i1}) \quad S_2 = \max(SNR_{i2})$$

If the number of RSs selected in i. step exceeds a threshold N_R

- ii. Only N_R RSs with largest J_i are finally selected

$$J_i = \frac{SNR_{i1}}{S_1} * \frac{SNR_{i2}}{S_2}$$

A is suggested to be 0.3; N_R is suggested to be 2

Proposed Cooperative RS Transmission

Step 3(Information Step):

- All the selected relay nodes are informed with an adjusting table to adjust their downlink transmission timing to be synchronized in the cooperative transmission.

Table 1. Adjusting Table


RS ID	Destination MS/SS ID	Total Num. of RS	Order of the RS	Adjust delay $i1$
-------	----------------------	------------------	-----------------	-------------------

Step 4 (Cooperative Transmission Step):

- More than 1 RSs are used for the transmission between the BS and the dedicated MS. Cooperative transmission is in both uplink and downlink.


*Assume $Delay\ i1 \leq Delay\ i2$, $Adjust\ delay\ i1 = Delay\ i2 - Delay\ i1$
 $Adjust\ delay\ i2 = 0$*

Message Flow in Cooperative RS Transmission

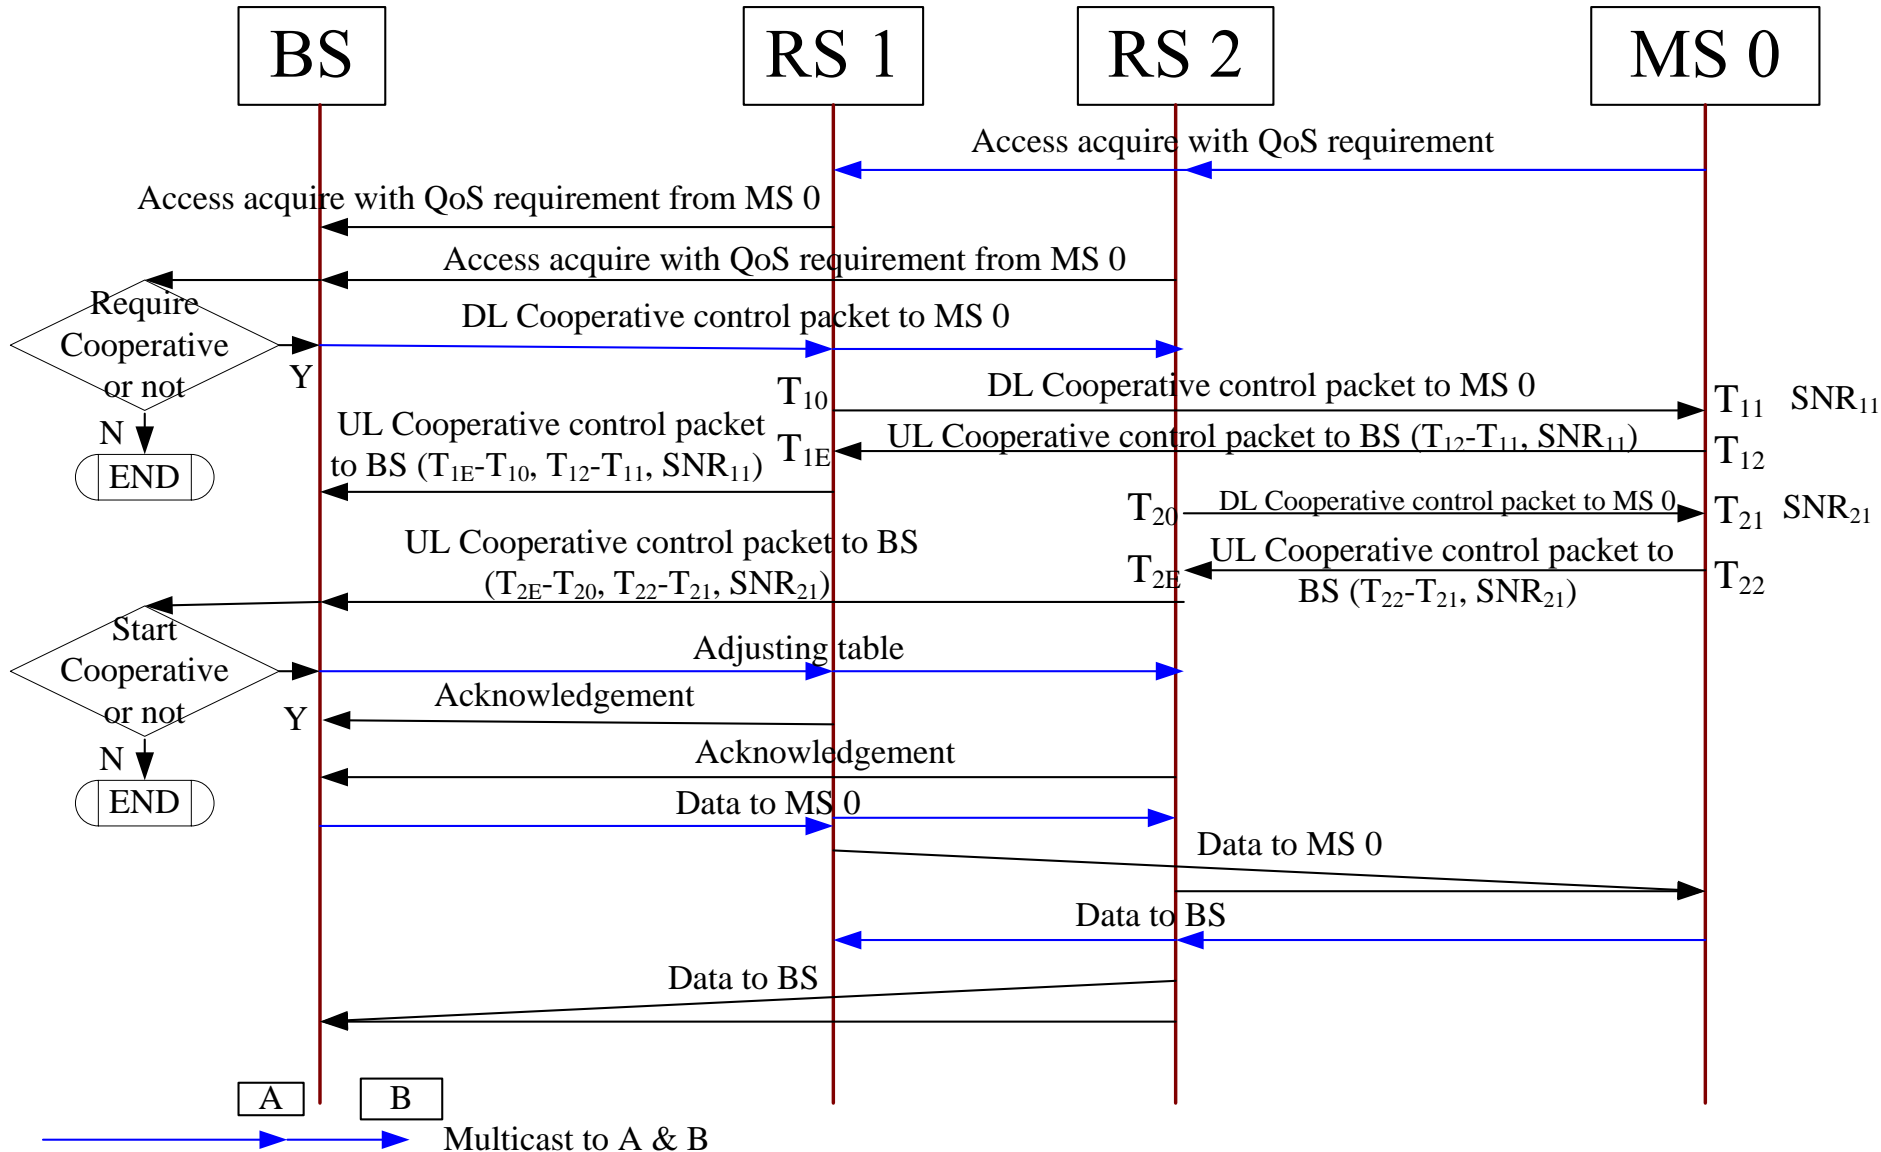

Packet Format in Cooperative RS Transmission

Generic MAC header format

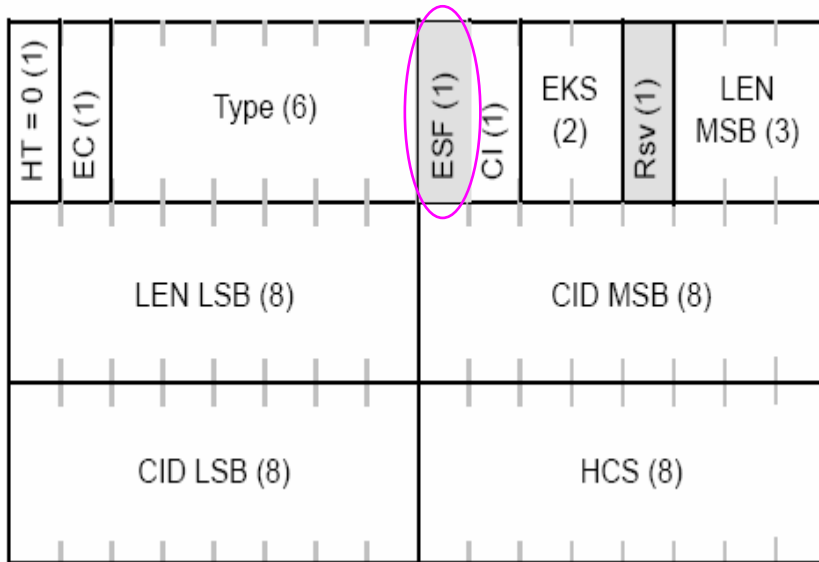


ESF: Extended subheader field.

If ESF = 0, the extended subheader is absent.

If ESF = 1, the extended subheader is present and will follow the GMH immediately.

ESF is used to indicate DL cooperative control packet/ UL cooperative packet / DL RS Adjusting table/ UL RS acknowledgement

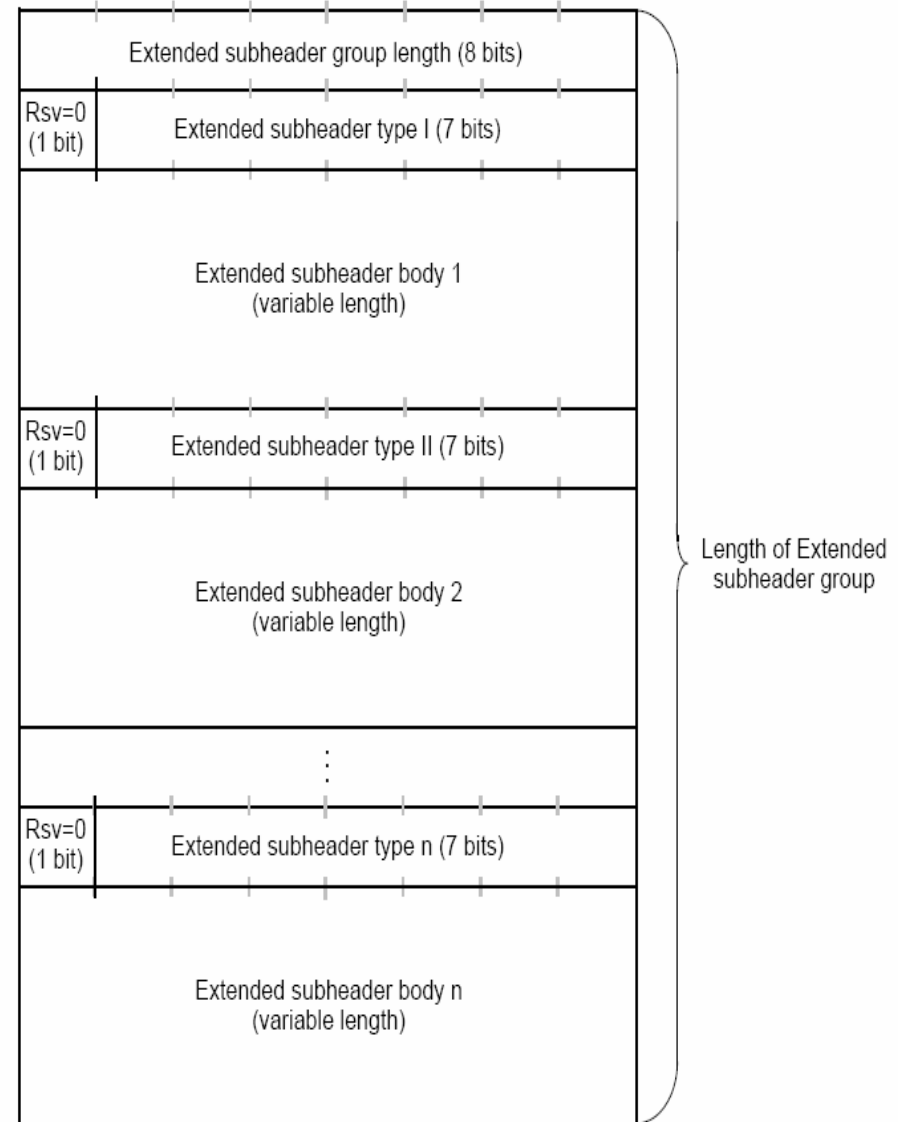

Extended subheader group format

Packet Format in Cooperative RS Transmission

Table 1 Description of extended subheaders types (DL)

ES type	Name	ES body size	Description
6	cooperative control packet	1byte	All reserved
7	RS Adjusting table	1 byte	Indicate the payload length in bytes

Payload of RS Adjusting table

1 byte	1 byte	1 byte	1 byte	2 bytes	...	1 byte	1 byte	2 bytes
DID	NRS	RSID 1	SN 1	AD1	...	RSID N	SN N	AD N

DID: Destination MS/SS ID

NRS: Number of RS

RSID i : i -th cooperative RS ID

SN i : index of STBC assigned to i -th cooperative RS

AD i : Retract transmission time of i -th cooperative RS (unit ns)

Packet Format in Cooperative RS Transmission

Table 2 Description of extended subheaders types (UL)

ES type	Name	ES body size	Description
6	cooperative control packet	1byte	Indicate the payload length in bytes
7	RS Acknowledgement	1byte	All reserved

Payload of cooperative control packet

1 byte 1 byte 3~6 bytes 2 bytes 2 bytes

SID	RSID	SNR	PST	RSE
-----	------	-----	-----	-----

Should be added by the possible RS. The content is $T_{iE}-T_{i0}$ (unit: ns)

SID: Source MS/SS ID

RSID : ID of the possible RS

SNR: Received SNR of the possible RS


PST: $T_{i2}-T_{i1}$ (unit: ns)

RSE: ReServed for Enhence of the possible RS

Where i denotes the ID of RS

Frame Structure in Cooperative RS Transmission

Connection Step:

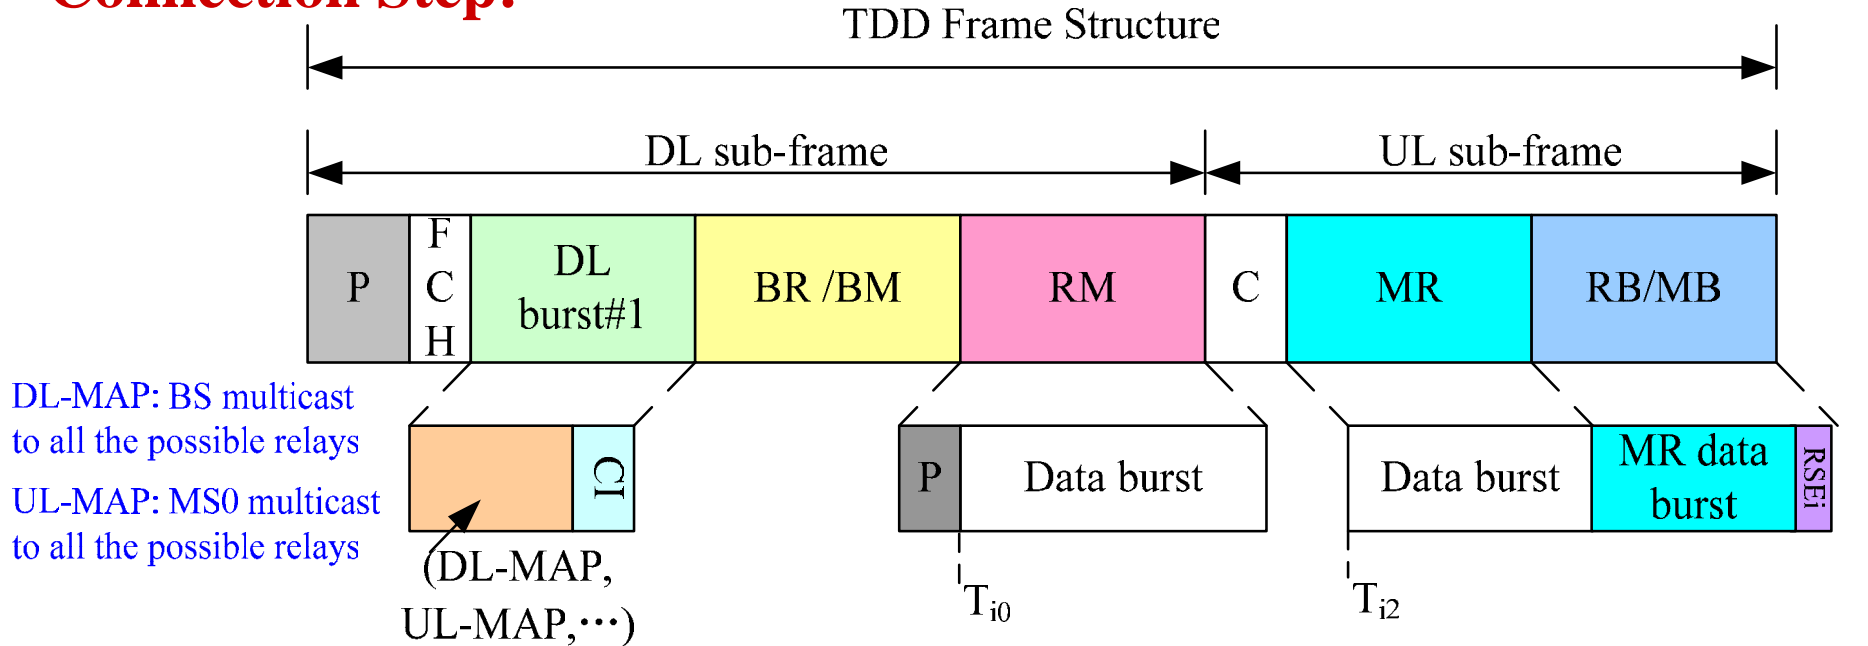


Frame structure in [1] is used for illustrations.

[1] C80216mmr-05_005r2, A Recommendation on PMP Mode Compatible Frame Structure.

Frame Structure in Cooperative RS Transmission

Transmission Step:

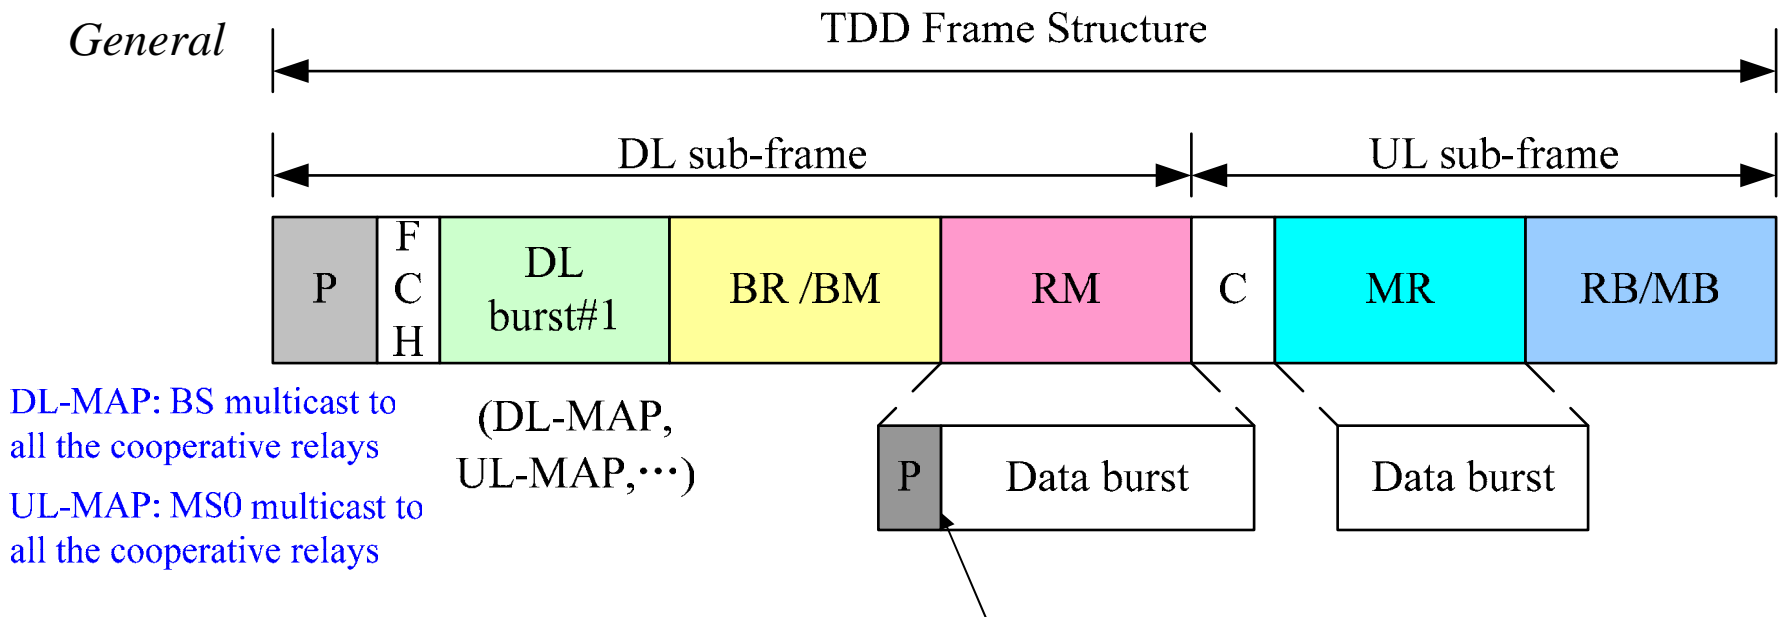


In both uplink and downlink, RS 1 and RS 2 are allocated the same chunk for cooperative transmission and different chunks for other MSs

Frame structure in [1] is used for illustrations.

Frame Structure in Cooperative RS Transmission


Transmission Step:

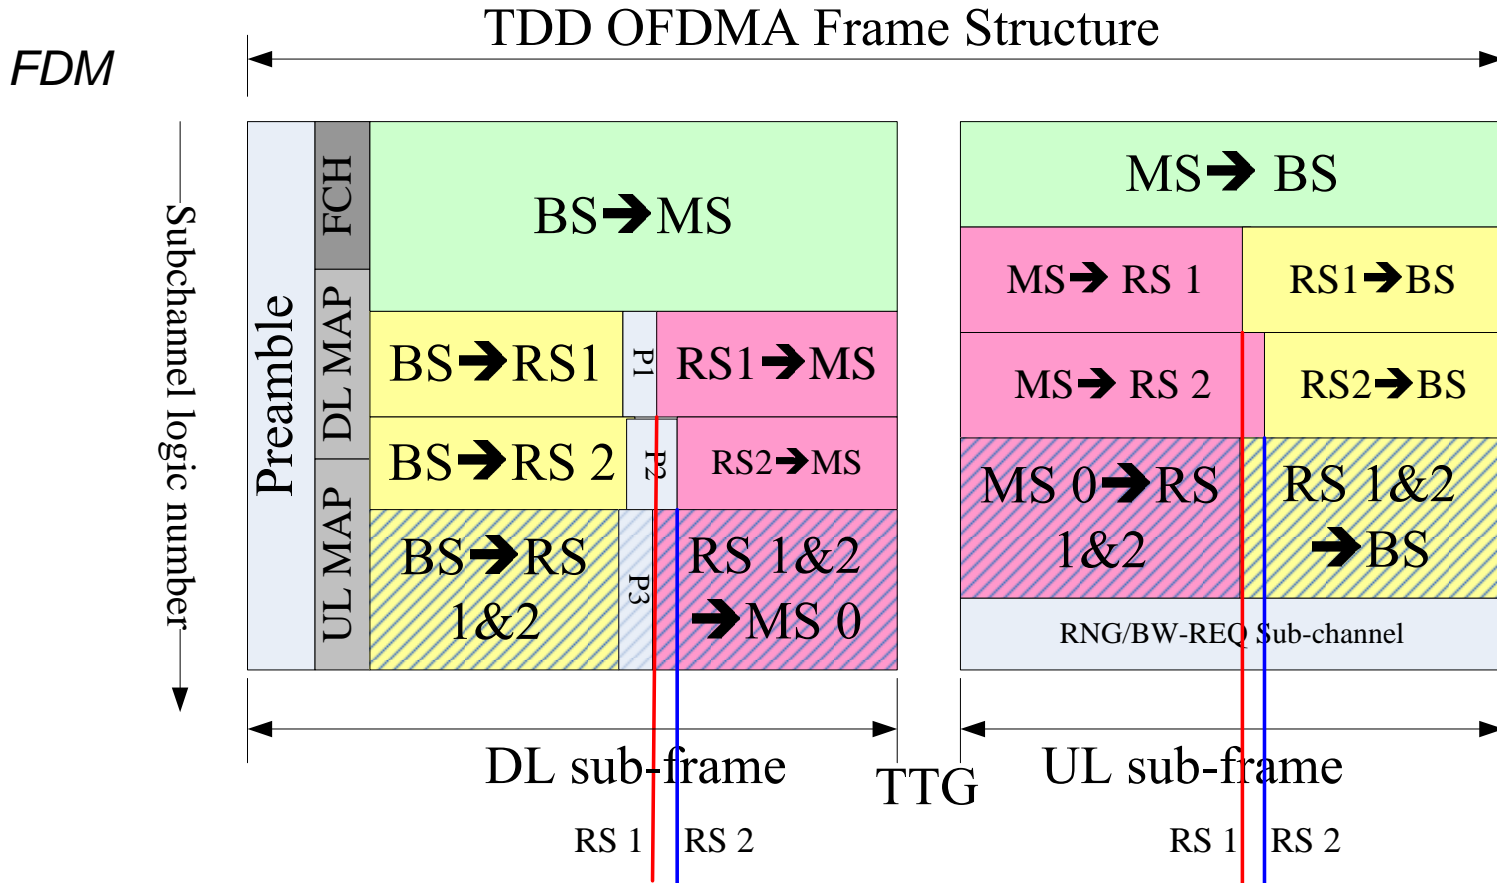

The transmission starting time of RS 1 & RS 2 is different

Frame Structure in Cooperative RS Transmission

Transmission Step:

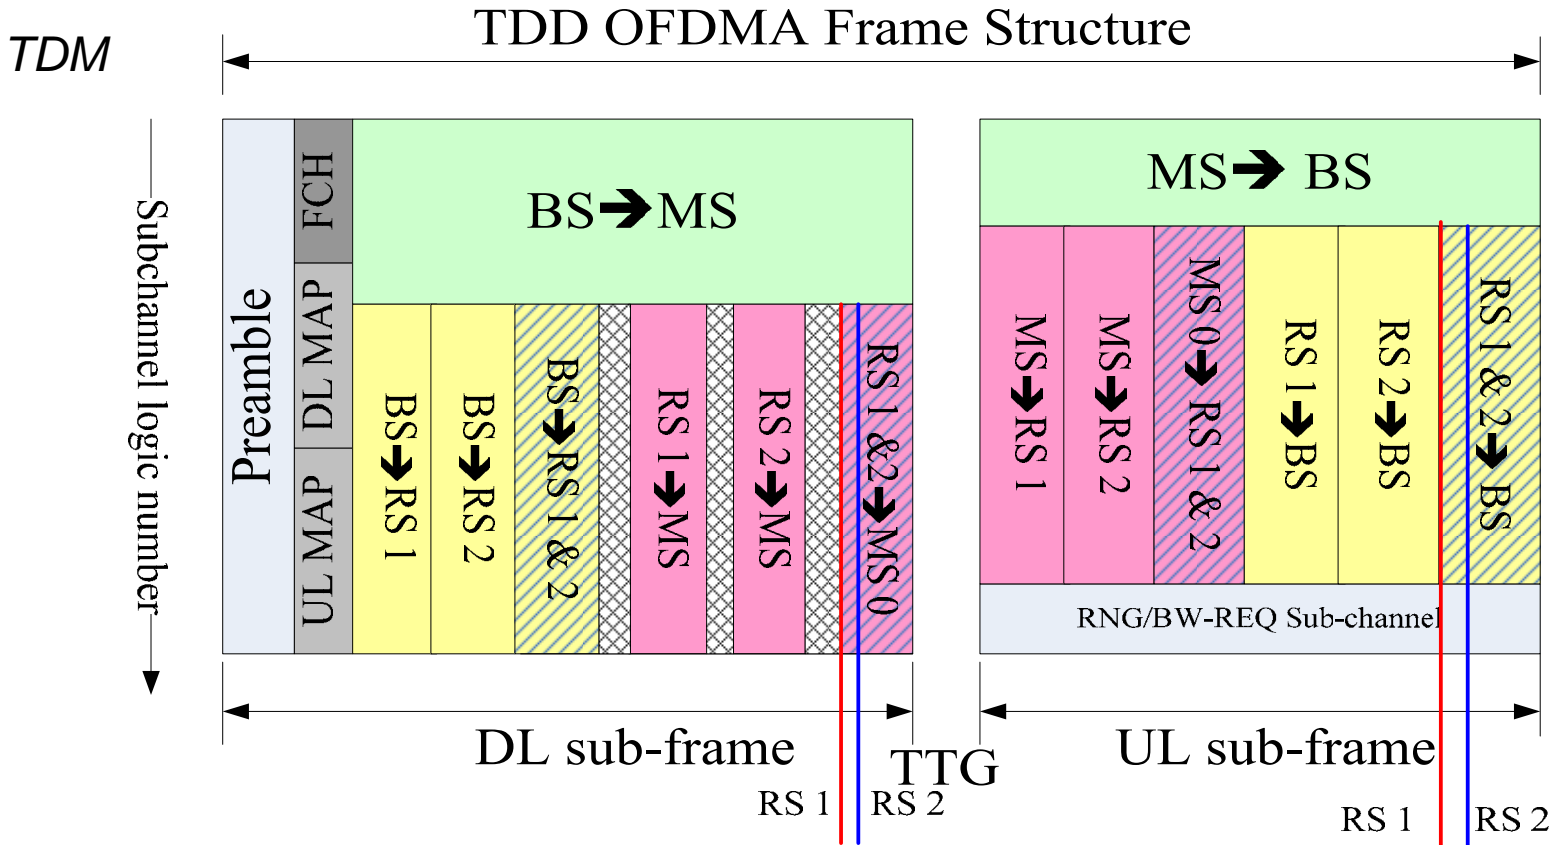

The transmission starting time of RS 1 & RS 2 is different

Merits of the Proposed Cooperative RS Transmission Scheme

- The proposed cooperative RS transmission scheme can
 - Realize synchronized transmission.
 - Balance the received performance and the system capacity.
- No hardware change in MS is required when the proposed cooperative transmission is used