

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>Proposed Text for Mitigation Techniques Section of Part 3 of the Coexistence Recommended Practice – Working Document Version 1.3</b>	
Date Submitted	<b>2002-05-17</b>	
Source(s)	Reza Arefi ArrayComm, Inc.	Voice: (202) 383-3346 Fax: (202) 721-9818 E-mail: <a href="mailto:reza@arraycomm.com">reza@arraycomm.com</a>
Re:	Call for contribution on the amendment to the Coexistence Recommended Practice document under development in 802.16.2. Specifically, this contribution proposes text for Part 3 of the Recommended Practices document.	
Abstract	The proposed text briefly covers the role of the adaptive beamforming antennas in a wireless system and describes the interference mitigating effects of such antennas on the coexistence of BWA systems in co-channel and adjacent-channel cases.	
Purpose	The purpose of this contribution is to propose text for TG2 to adopt to be included in the 2-11 GHz amendment to the Recommended Practice document.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) &lt;<a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a>&gt;, including the statement “IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard.”</p> <p>Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair &lt;<a href="mailto:r.b.marks@ieee.org">mailto:r.b.marks@ieee.org</a>&gt; as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site &lt;<a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a>&gt;.</p>	

# Proposed text for Mitigation Techniques Section of Part 3 of the Coexistence Recommended Practice – Working Document Version 1.3

*Reza Arefi, ArrayComm, Inc.*

## Introduction

Mitigation Techniques section of Part 3 of the draft version 1.3 of the Coexistence Recommended Practice is meant to include mitigation techniques used to combat interference. It was originally suggested that the material from Part 1 be used as a starting point. Due to the inclusion of Adaptive Antennas (AA) in the 802.16a draft standard and the importance of AA technology in any future BWA system, this submission proposes that a subsection on AA be added to this section. It also proposes supporting text for this new section.

## Proposed Text

### Adaptive Antennas

Adaptive Antennas (AA) have been successfully implemented in commercial and military systems for many years. AA increase the coverage and capacity of wireless networks and enhance their performance through spatial processing, beamforming, coherent combining of the arrived signals, exploiting uncorrelated fading among multiple antennas, and interference suppression and mitigation. Using a variety of signal-processing algorithms, an AA system effectively senses channel conditions and works to “locate” and adaptively “track” all the relevant signals and interferers present in order to dynamically minimize interference and maximize reception of the signals of interest. With adaptive arrays, it is possible to discriminate users from interferers, even at low SINR, and provide reliable gain and interference mitigation.

In FDD systems, downlink beamforming techniques such as Direction of Arrival (DoA)-based approaches use the uplink signals to construct an estimate of the downlink channel response by assuming some degree of correlation between the uplink and downlink channels. In contrast, channel reciprocity in TDD acts as an inherent feedback mechanism and allows the adaptive antennas to perform at their best for both uplink and downlink channels. There are many public domain and proprietary beamforming algorithms that are each optimized for a particular wireless channel or technology. Depending on the details of the air interface and the service definition, so-called “spatial channels” can be robustly created via spatial processing whereby each conventional temporal channel (e.g. frequency and timeslot or code combination) may be reused within the cell, achieving re-use factors less than one. Figure 1 shows how the adaptive algorithms behave with respect to interferers and the desired signal.

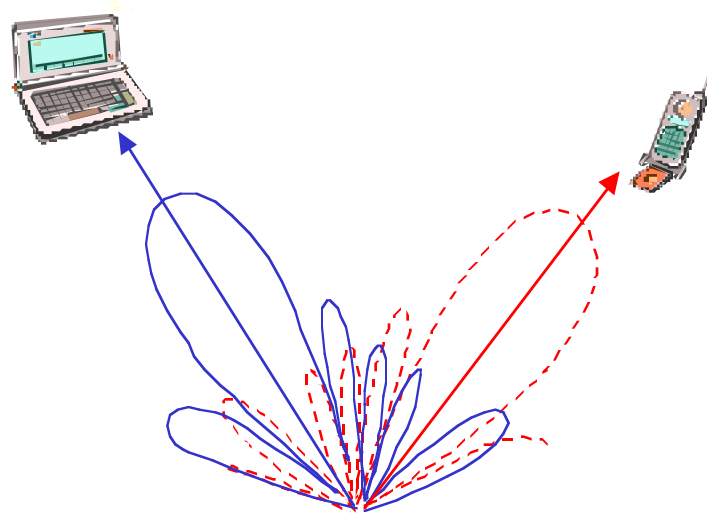


FIGURE 1

### Beam forming and interference cancellation

For detailed information about AA, please refer to [1-11].

The direct effect of AA on coexistence, however, is due to the fact that the RF energy radiated by transmitters is focused in specific areas of the cell and is not radiated in all directions. Moreover, beamforming with the goal of maximizing the link margin for any given user inside the cell coverage area at any given time makes the AA beams' azimuth and elevation vary from time to time. These two factors suggest that, in simulating the coexistence, the adaptive antenna pattern and gain need to be considered as random variables both in E- and H-plane. This characteristic plays a major role in determining the likelihood of interference in coexistence scenarios. While an absolute worst case may look prohibitive, the statistical factor introduced by the use of AA determines the percentage of time that the worst case happens. If this percentage is satisfactorily small, the coexistence rules may be relaxed, thus helping the economics of the wireless deployment.

#### *Co-channel – Adjacent Area*

The main source of serious interference in co-channel adjacent area situations is main beam coupling. As an example, the SS-to-BS interference due to main-beam coupling is depicted in figure 2. This phenomenon, which happens irrespective of the types of antennas used, creates more severe interference power when the victim BS is using an AA. This is due to the typically higher gain of the AA beams compared to a conventional wide-sectored antenna. However, due to the statistical factor introduced by the AA, the likelihood of this scenario occurring is greatly reduced compared to the case with conventional antennas. Simulation results confirm this.

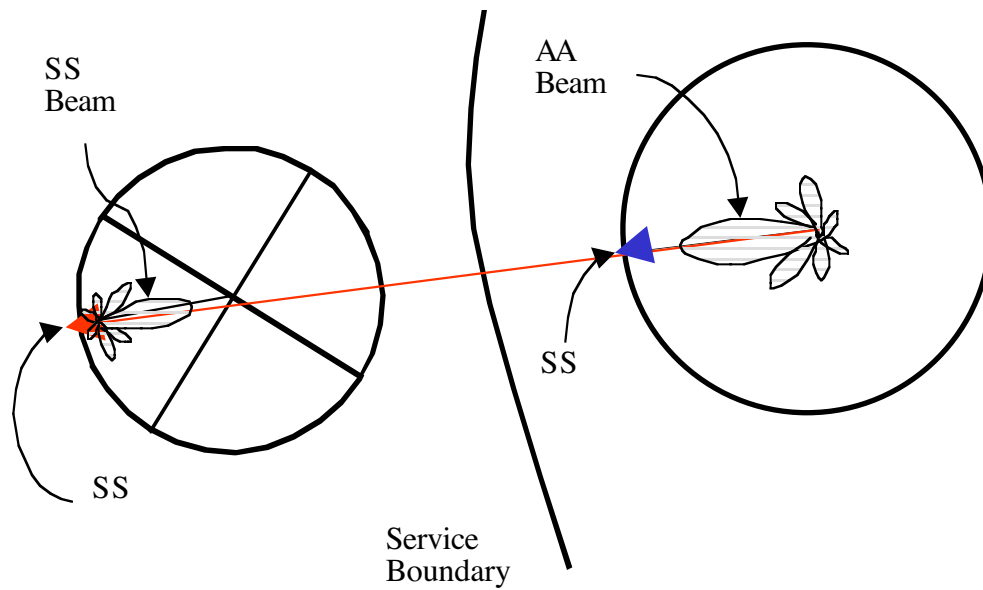


FIGURE 2

**Main beam coupling***Same Area – Adjacent Channel*

The introduction of a statistical factor in the creation and reception of interference power also helps coexistence in the same area – adjacent channel case. The main-beam coupling problem, however, is not as severe as the co-channel case due to the fact that the gain of the AA is reduced because of the loss of coherency in its out-of-band operation. Therefore, although in this case the distances between interferers and victims are smaller, the reduction in the main beam gain of the AA further reduces the interference power into AA from other antennas operating in adjacent bands and vice versa. All simulations point to the fact that the BS-to-BS direct antenna coupling is the most problematic case for coexistence. With the use of AA, the loss of coherency in out-of-band operations reduces the gain towards the interferers/victims, thus lowering the amount of interference power.

**References**

- [1] S. Haykin. Adaptive filter theory. Prentice Hall. 1991 y 1996.
- [2] Compton. Adaptive antennas: Concepts and performance. Prentice Hall 1988.
- [3] S. Haykin. Advances in array processing. Prentice Hall. 1991.
- [4] B.Widrow, S.D. Stearus. Adaptive signal processing. Prentice Hall. 1985.

- [5] Mozingo, Miller. Introduction to adaptive arrays. Wiley Interscience. 1980.
- [6] Hudson. Adaptive arrays principles. Peter Peregrinus. 1981.
- [7] S. Haykin, Editor. Advances in spectrum analysis and array processing. Vol. II Prentice Hall. 1991.
- [8] Farina. Antenna based signal processing techniques for radar systems. Artech House, Boston 1991.
- [9] J.C. Liberti, T.S. Rappaport, Smart Antennas for Wireless Communications: IS-95 and Third Generation CDMA Applications, Prentice Hall Communications Engineering and Emerging Technologies, 1999.
- [10] Rappaport, Smart Antennas: adaptive arrays, algorithms and wireless position location, Selected Readings IEEE.
- [11] J. Litva. Digital Beamforming in Wireless Communications, Artech House, 1996.