

Project	<b>IEEE 802.16 Broadband Wireless Access Working Group</b> < <a href="http://ieee802.org/16">http://ieee802.org/16</a> >	
Title	<b>Revision of Hand-over Mechanism for Mobility Enhancement</b>	
Date Submitted	<b>2003-11-7</b>	
Source(s)	Phillip Barber Broadband Mobile Technologies, Inc. 8302 Sebastian Inlet Frisco, Tx 75035	Voice: +1 (972) 365-6314 Fax: +1 (925) 396-0269 <a href="mailto:pbarber@BroadbandMobileTech.com">[mailto:pbarber@BroadbandMobileTech.com]</a>
Re:	Response to IEEE 802.16e-03/23 (Call for Contributions on IEEE 802.16e/07r4)  Response to Session 27 Minutes remand C802.16e-03/54r0 to Ad Hoc Group for refinement and continued revision	
Abstract	Clarification, revision, and definition of Hand-over mechanism for Mobility Enhancements	
Purpose	Stimulate discussion on a more completely defined, flexible model and mechanism for facilitating mobility functionality	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures < <a href="http://ieee802.org/16/ipr/patents/policy.html">http://ieee802.org/16/ipr/patents/policy.html</a> >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < <a href="mailto:chair@wirelessman.org">mailto:chair@wirelessman.org</a> > as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site < <a href="http://ieee802.org/16/ipr/patents/notices">http://ieee802.org/16/ipr/patents/notices</a> >.	

# Revision of Hand-over Mechanism for Mobility Enhancement

*Phillip Barber*

*Broadband Mobile Technologies*

## Introduction

The mobility enhancements proposed in IEEE 802.16e-03/07r4 provide an initial framework for a robust mechanism to conduct mobility based on the IEEE 802.16 prior art. However, the current definition suffers several significant over-specifications in some areas; and critical omissions in other areas—notification mechanisms for initiation of hand-over and recovery on failed or terminated hand-over attempts being the most noticeable and objectionable. A systemic review of the model and mechanism provides insight into ways to streamline the solution, eliminate inconsistencies, and fill-in persistent holes.

## Systemic Assumptions

Establishing some systemic assumptions grants us an opportunity to create criteria for evaluating the merit of various solution mechanisms. My simple set includes:

- Mobility support for fixed, portable, mobile SS additions/modifications to existing standard
  - Enhancements to existing and proposed fixed standards only
    - Minimize changes to only what is necessary to accomplish task
    - Optional solutions whenever possible; avoid over-specification of new requirements
  - Support of all three multimedia modes of use on the same network seamlessly
    - Minimize performance impact on other modes of operation to support optional modes/multimedia
- Support for multimedia/timing sensitive traffic intrinsic/not just supported
  - Support of all three types of multimedia with adequate service granularity to enable meaningful market models
    - Minimize air interface and network performance impact of changes to support larger concurrent subscriber base with most robust performing multimedia set
    - Network and MSS may perform some activities less efficiently in order to conserve performance in other more critical areas
      - For instance an MSS may elect to temporarily use a course Ranging negotiated value that is moderately inefficient on UL power consumption in order to expedite a soft hand-over
- Support for variety of network configurations, sophistication, relationships
  - Minimize specification that limits configuration, operation, and interaction; only specify what is required to achieve mobility goals

- Not possible to completely predict all of the forms of successful network configuration; err on the side of flexibility and minimalism
- MSS more sophisticated than fixed device; more sophisticated knowledge, more complex decisions
  - Support for variety of MSS provisioned service profiles
  - MSS may be either use a centrally managed or distributed decision architecture for everything from authentication and service provisioning to hand-over mechanisms
    - MSS may have a great deal of knowledge about operating environment; things that connected network may be insensitive to
  - MSS may have other relationships
    - Private network connections
    - Foreign network connections
  - MSS has requirement to continuously evaluate its operating environment and assess mobility, network, and service options
    - MSS may be out-of-touch from connected network for periods while analyzing and assessing options
  - MSS has power conservation requirements
    - MSS may be out-of-touch from connected network for periods on power conservation
- Network is resource gatekeeper/master control for network resources
  - He who controls the resources has final say on the allocation of those resources
  - Resource conservation, especially air interface conservation, is priority
  - Network or MSS may make decisions that reduce MSS allocated QoS in order to maximize other performance criteria

## **Observations on Current IEEE 802.16e-03/07r4 Based on Criteria from Assumptions**

### **1. Neighbor Advertisement, Scanning, and Ranging for Hand-over**

#### *Problem:*

For mobility, MSS have a consistent periodic need to evaluate their changing operating environment. This requirement exceeds the periodic 6.4.10 proscribed periodic ranging for fixed SS and includes MSS interest in viewing other networks, a concept foreign to fixed SS networks.

In the current proposal, the solution mechanism includes BS neighbor broadcast advisories, MSS scanning and possibly ranging nearby same and foreign network BS.

BS neighbor broadcast currently contains inadequate information for SS to base distributed information hand-over decisions on and would necessitate MSS scanning and possibly ranging, likely with unacceptable frequency, of nearby BS to determine suitability for hand-over, even for BS on the same network. Excessive

scanning is undesirable because it results in frequent absence of the MSS from the Serving BS scheduler and unavailability to initiation of timing sensitive DL traffic. Excessive ranging is undesirable because it unnecessarily consumes ranging contention slots and UL/DL scheduler slots on Target BS, impacting effective throughput, service granularity, and support for timing sensitive traffic. Inclusion of Beacon TLV elements is a careful balancing act between mobility prosecution efficiency and air interface/backhaul loading. Implementers should maintain flexibility by leaving TLV inclusions optional.

*Remedy:*

Expand the role and increase the TLV data provided in MOB\_NBR-ADV broadcast message. This will decrease the need for MSS to scan and range same network neighbor BS to obtain information useful in making hand-over/network re-entry decisions. Also, MOB\_NBR-ADV beacon can be scanned and used by MSS on initial network entry to identify those networks to which it has provisioned affiliation and may be interested in establishing connection without having to scan and range all nearby BS. Make TLV items optional. Decrease frequency of Beacon events and allow flexible Beacon-to-Beacon structure to decrease overhead.

*Remedy Action 1:*

*[In 1.4.1.2.1.1 Network topology advertisement, replace paragraph 1 in its entirety with:]*

‘A BS may periodically broadcast information about the network topology using the MOB\_BEA-ADV MAC broadcast management message. An MSS may decode this message to find out information about the parameters of available networks and neighbor BS. Each MSS will thus be able to assess interest in joining the network and synchronize quickly with neighbor BS.’

*Remedy Action 2:*

In *P802.16-REVd/D1-2003*, **6.4.2.3.2 Downlink Map (DL-MAP) message**, paragraph 5, Base Station ID defines Operator ID as ‘The most significant 24 bits...’ of the Base Station ID 48 bit value. This is very restrictive to both the Base Station ID (cannot use MAC address for Base Station ID) and for Operator ID. Need to create a separate 24 bit Operator ID for the network. We can broadcast the Operator ID less frequently using the **6.4.2.3.44 Beacon Network Broadcast Advisory (MOB\_BEA-ADV) management message** and still get the same benefit of ‘...a network management hook that can be combined with the Downlink Channel ID of the DCD message for handling edge-of-sector and edge-of-cell situations.’

*[Replace P802.16-REVd/D1-2003, 6.4.2.3.2 Downlink Map (DL-MAP) message, paragraph 5 with:]*

**Base Station ID**

The Base Station ID is a 48-bit long field uniquely identifying the BS. The Base Station ID shall be programmable.’

*Remedy Action 3:*

*[Replace 6.4.2.3.44 Neighbor Advertisement (MOB\_NBR-ADV) in its entirety with:]*

#### 6.4.2.3.44 Beacon Network Broadcast Advisory (MOB\_BEADV) management message

An MOB\_BEADV management message may be broadcast by a BS at a periodic interval (BEADV interval, see Table 275a) to identify the network and define the characteristics of neighbor BS to potential MSS seeking initial network entry or hand-over, and to identify the network to foreign networks. The BS may restrict MOB\_BEADV to data covering only BS sharing the same Operator ID. BS may restrict MOB\_BEADV to data changed during BEADV interval. BS may include all, select, or no TLV data in MOB\_BEADV. BS may vary TLV data elements included in MOB\_BEADV message from message to message.

**Table 84d—MOB\_BEADV Beacon Broadcast**

Syntax	Size	Notes
MOB_BEADV Message Format() {		
Management Message Type=48	8 bits	
BS ID	48 bits	Base station unique identifier (Same number as that broadcasted on the DL-MAP message)
Operator ID	48 bits	Unique Network ID
Configuration Change Count	8 bits	
TLV encoded items	Variable	See Table 292a
}		

A BS shall generate MOB\_BEADV messages in the format shown in Table 56ad. The following parameters shall be included in the MOB\_BEADV message unless otherwise noted as an optional item in which case they may be included,

**BS ID** — same as the Base Station ID parameter in the DL-MAP message

**Operator ID** — the unique network ID shared by an association of BS

**Configuration Change Count** – Incremented by one (modulo 256) whenever any of the values relating to any included data element changes. If the value of this count in a subsequent MOB\_BEADV message remains the same, the MSS can quickly disregard the entire message

All other parameters are coded as TLV values (see Table 292a). All TLV items are optional.

**Network Type** — defines networks based on service management type and prosecution of non-affiliated MSS connection. The following encodings apply:

0=not specified

1=managed, restricted; ASA function is network managed, MSS access to the network is restricted to affiliated MSS

2=managed, provisional; ASA function is network managed, MSS access to the network is restricted to affiliated MSS, however, limited access may be provided to non-affiliated MSS

3=managed, unrestricted; ASA function is network managed, MSS access to the network is unrestricted

4=unmanaged, restricted; ASA function is either static or unmanaged, MSS access to the network is restricted to affiliated MSS

5=unmanaged, provisional; ASA function is either static or unmanaged, MSS access to the network is restricted to affiliated MSS, however, limited access may be provided to non-affiliated MSS

6=unmanaged, unrestricted; ASA function is either static or unmanaged, MSS access to the network is unrestricted

other=reserved

**Time Stamp** — number of milliseconds since midnight GMT

**BS Next Beacon** — estimated time interval in milliseconds until next BS beacon event

**BS Next Contention Network Entry** — estimated time interval in frames until next BS contention based MSS network entry interval

**BS Network Managed Handover Supported** — binary value indicating support for network managed MSS hand-over at BS. 0=no; 1=yes

**BS Air Interface Advertised Bandwidth** — a coarse, implementation specific calculated value

**BS Air Interface Available Bandwidth** — a coarse, implementation specific calculated value

**BS Backhaul Advertised Bandwidth** — a coarse, implementation specific calculated value

**BS Backhaul Available Bandwidth** — a coarse, implementation specific calculated value

**N\_QoS\_Records** — Number of AvailableQoSParamSet Records

**Service Class Code** — Code of Service Class in AvailableQoSParamSet

**N\_Neighbors** – Number of advertised neighbor BS

For each advertised Neighbor BS, the following TLV parameters may be included,

**Neighbor BS-ID** – Same as the Base Station ID parameter in the DL-MAP message of Neighbor BS

**Configuration Change Count** – Incremented by one (modulo 256) whenever any of the values relating to any included TLV data element changes. If the value of this count in a subsequent MOB\_BEAD-ADV message remains the same, the MSS can quickly disregard the entire message

**Neighbor Operator ID** — the unique network ID shared by an association of BS; may be omitted if same as for transmitting BS

**Neighbor Network Type** — defines networks based on service management type and prosecution of non-affiliated MSS connection. The following encodings apply:

0=not specified

1=managed, restricted; ASA function is network managed, MSS access to the network is restricted to affiliated MSS

2=managed, provisional; ASA function is network managed, MSS access to the network is restricted to affiliated MSS, however, limited access may be provided to non-affiliated MSS

3=managed, unrestricted; ASA function is network managed, MSS access to the network is unrestricted

4=unmanaged, restricted; ASA function is either static or unmanaged, MSS access to the network is restricted to affiliated MSS

5=unmanaged, provisional; ASA function is either static or unmanaged, MSS access to the network is restricted to affiliated MSS, however, limited access may be provided to non-affiliated MSS

6=unmanaged, unrestricted; ASA function is either static or unmanaged, MSS access to the network is unrestricted

other=reserved

**Neighbor Physical Frequency** – DL center frequency (kHz).

**Neighbor Time Stamp** — number of milliseconds since midnight GMT when neighbor info created for transfer to Serving BS

**Neighbor BS Next Beacon** — estimated time interval in milliseconds from Time Stamp until next BS beacon event

**Neighbor BS Next Contention Network Entry** — estimated time interval in frames until next BS contention based MSS network entry interval

**Neighbor BS Network Managed Handover Supported** — binary value indicating support for network managed MSS hand-over at Neighbor BS

**Neighbor DCD\_Settings** — DCD\_settings is a compound TLV value that encapsulates a DCD message that may be transmitted in the advertised BS downlink channel. This information is intended to enable fast synchronization of the MSS with the advertised BS downlink. The DCD settings fields shall contain only neighbor's DCD TLV values which are different from the serving BS corresponding values. For values that are not included, the MSS shall assume they are identical to the serving BSs corresponding values.

**Neighbor UCD\_Settings** — UCD\_settings is a compound TLV value that encapsulates a UCD message that may be transmitted in the advertised BS downlink channel. This information is intended to enable fast synchronization of the MSS with the advertised BS uplink. The UCD settings fields shall contain only neighbor's UCD TLV values which are different from the serving BS's corresponding values. For values that are not included, the MSS shall assume they are identical to the serving BS's corresponding values.

**Neighbor BS Air Interface Advertised Bandwidth** — a coarse, implementation specific calculated value

**Neighbor BS Air Interface Available Bandwidth** — a coarse, implementation specific calculated value

**Neighbor BS Backhaul Advertised Bandwidth** — a coarse, implementation specific calculated value

**Neighbor BS Backhaul Available Bandwidth** — a coarse, implementation specific calculated value'

**Neighbor N\_QoS\_Records** — Number of AvailableQoSParamSet Records

**Neighbor Service Class Code** — Code of Service Class in AvailableQoSParamSet'

*Remedy Action 4:*

*[Replace 11.1.8 NBR-ADV Message Encodings in its entirety with:]*

**'11.1.8 MOB\_BEA-ADV Message Encodings**

**Table 292a—MOB\_BEA-ADV Encodings**

Name	Type (1 byte)	Length (1 byte)	Value (Variable-length)
Network Type	?	8 bits	0=not specified; 1=managed, restricted; 2=managed, provisional; 3=managed, unrestricted; 4=unmanaged, restricted; 5=unmanaged, provisional; 6=unmanaged, unrestricted; other=reserved
Time Stamp	?	32 bits	Number of milliseconds since midnight GMT (set to 0xffffffff to ignore)
BS Next Beacon	?	16 bits	Estimated time interval in frames until next BS beacon event
BS Next Contention Network Entry	?	8 bits	Time interval in frames until next BS contention based MSS network entry interval; value=0 indicates feature not supported
BS Network Managed Handover Supported	?	1 bit	Binary 0=no; 1=yes
BS Air Interface Advertised Bandwidth	?	32 bits	In bits per second
BS Air Interface Available Bandwidth	?	32 bits	In bits per second
BS Backhaul Advertised Bandwidth	?	32 bits	In bits per second
BS Backhaul Available Bandwidth	?	32 bits	In bits per second

N_QoS_Records	?	8 bits	Number of AvailableQoSParamSet Records
For (j=0 ; j<N_QoS_Records ; j++) {			
Service Class Code	?	8 bits	Code of Service Class in AvailableQoSParamSet
}			
N_Neighbors	?	8 bits	Number of advertised BS neighbors
For (j=0 ; j<N_Neighbors ; j++) {			
Neighbor BS-ID	?	48 bits	
Neighbor Operator ID	?	48 bits	Unique Network ID
Neighbor Network Type	?	8 bits	0=not specified; 1=managed, restricted; 2=managed, provisional; 3=managed, unrestricted; 4=unmanaged, restricted; 5=unmanaged, provisional; 6=unmanaged, unrestricted; other=reserved
Neighbor Time Stamp	?	32 bits	Number of milliseconds since midnight GMT (set to 0xffffffff to ignore)
Neighbor BS Next Beacon	?	16 bits	Time interval in frames until next neighbor BS beacon event
Neighbor BS Next Contention Network Entry	?	16 bits	Time interval in frames until next neighbor BS contention based MSS network entry interval; value=0 indicates feature not supported
Neighbor BS Network Managed Handover Supported	?	1 bit	Binary 0=no; 1=yes
Neighbor DCD_Settings	?	Variable	DCD_settings is a compound TLV that encapsulates an entire DCD message (excluding the generic MAC header). All the rules and settings that apply to the DCD message apply to the contents encapsulated in this TLV.
Neighbor UCD_Settings	?	Variable	UCD_settings is a compound TLV value that encapsulates an entire UCD message (excluding the generic MAC header). All the rules and settings that apply to the UCD message apply to the contents encapsulated in this TLV.
Neighbor BS Air Interface Advertised Bandwidth	?	32 bits	In bits per second

Neighbor BS Air Interface Available Bandwidth	?	32 bits	In bits per second
Neighbor BS Backhaul Advertised Bandwidth	?	32 bits	In bits per second
Neighbor BS Backhaul Available Bandwidth	?	32 bits	In bits per second
Neighbor N_QoS_Records	?	8 bits	Number of AvailableQoSParamSet Records
For (h=0 ; h<N_QoS_Records ; h++) {			
Neighbor Service Class Code	?	8 bits	Code of Service Class in AvailableQoSParamSet
}			
}			

*Remedy Action 5:*

*[In 10.1 Global Values, Table 275a—Parameters and Constants, pages 39&40, modify as:]*

In order to partially compensate for the increased DL data load introduced by the more extensive MOB\_BEADV broadcast management message, change references from ‘NBR-ADV’ to ‘BEA-ADV’ in Table 275a and extend the MAX interval for BEA-ADV interval to 30 seconds. Could dynamically reduce applied interval based on cell characteristics and transient MSS requirements.

*Remedy Action 6:*

One useful mechanism for building neighbor BS relationships for reporting in MOB\_BEADV is to have MSS periodically provide scanning results to the Serving BS. The advantages of this solution type are that 1) the MSS can provide information about BS on both affiliated and foreign networks that may impact MSS hand-over decisions, that the Serving network might otherwise be unaware; and 2) that this model allows for dynamic neighbor BS table creation and maintenance thus not requiring static programming or centralized management. This solution requires the creation of MOB\_INF-REQ and MOB\_INF-RSP MAC management messages. MOB\_SS\_INF-REQ/RSP provides some similar information to REP-REQ/RSP but far less detailed and for a much broader frequency domain. We can also provide other useful information about the MSS like Home Network ID, Authentication Server Address (that holds the MSS provisioned service profile and account status), Mobility Support Type (0=none, 1=portable, 2=mobile, MSS managed hand over, 3=mobile, network managed hand over), Power Type (A/C, battery), Power Status (10% increments), other?? We also need to add a timer to expire aged Neighbor BS from the Neighbor BS table. And we need to add the relevant backbone messages to maintain neighbor relationships between affiliated BS and pass the relevant information for reporting in MOB\_BEADV.

*[In 1.4.1.2.1.1 Network topology advertisement, append to end of section:]*

‘MOB\_BEAD-ADV Neighbor BS associations may be acquired by static or dynamic configuration. Static sources may include implementation configuration of the BS and/or configuration of the BS through another network management device. Dynamic sources may include Neighbor BS identified and reported to the Serving BS by attached MSS through MOB\_SS\_INF-RSP management messages. In dynamic association operation, BS may identify each other over the backhaul network as Neighbor BS using the **C.2.9 Neighbor\_Notification.request message**, **C.2.10 Neighbor\_Notification.response message** and **C.2.11 Neighbor\_Notification confirmation message**.

Neighbor BS operational and performance TLV data for MOB\_BEAD-ADV broadcast may be assembled by the BS using **C.2.12 Neighbor\_Info message** and/or **C.2.4 MSS-info-response messages**.’

Add new MAC Data/Control Plane sub-section:

*[Add 6.4.2.3.51 MOB\_SS\_INF-REQ management message-]*

**‘6.4.2.3.51 MOB\_SS\_INF-REQ message**

A BS may transmit an MOB\_SS\_INF-REQ message to an MSS at any time to obtain MSS operating information and neighbor and foreign network BS measurements. The message shall be transmitted on the MSS basic CID.

**Table 84l—MOB\_SS\_INF-REQ message format**

Syntax	Size	Notes
MOB_SS_INF-REQ _Message_Format() {		
Management Message Type = 55	8-bits	
}		

A BS shall generate MOB\_SS\_INF-REQ messages in the format shown in Table 84l.’

*[Add 6.4.2.3.52 MOB\_SS\_INF-RSP management message-]*

**‘6.4.2.3.52 MOB\_SS\_INF-RSP message**

A MSS shall transmit an MOB\_SS\_INF-RSP message to a BS in response to an MOB\_SS\_INF-REQ or may send an unsolicited MOB\_SS\_INF-RSP to a BS. The message shall be transmitted on the basic CID.

**Table 84m—MOB\_SS\_INF-RSP message format**

Syntax	Size	Notes

MOB_SS_INF-REQ _Message_Format() {		
Management Message Type = 56	8 bits	
Mobility Support Type	4 bits	What, if any, type of mobility functionality the MSS supports. 0=none; 1=portable; 2=mobile, MSS managed hand over; 3=mobile, network managed hand over; other=reserved
Power Type	4 bits	Disclosure of what power source the MSS employs. 0=line power; 1=battery power; other=reserved
Power Status	4 bits	Disclosure of current MSS power supply status. Value provided as whole number representing the tens grouping of percentage of power remaining, in 10% increments, rounded up
TLV Encoded information	Variable	TLV specific, See Table 321a
}		

A BS shall generate MOB\_SS\_INF-RSP messages in the format shown in Table 84m. The following parameters shall be included in the MOB\_SS\_INF-REQ message unless otherwise noted as an optional item in which case they may be included,

**Mobility Support Type** — Disclosure of what, if any, type of mobility functionality the MSS supports. The following encodings apply:

- 0=none
- 1=portable
- 2=mobile, MSS managed hand over
- 3=mobile, network managed hand over
- other=reserved

**Power Type** — Disclosure of what power source the MSS employs. The following encodings apply:

- 0=line power
- 1=battery power
- other=reserved

**Power Status** — Disclosure of current MSS power supply status. Value provided as whole number representing the tens grouping of percentage of power remaining, in 10% increments, rounded up (i.e. 18% power remaining would report a value of 2; 31% power remaining would report a value of 4; 97% power remaining would report a value of 0).

All other parameters are coded as TLV values (see Table 321a). All TLV items are optional.

**Home Network ID** — Operator ID of default network to which MSS is associated; only include if different than Serving BS Operator ID

**Authentication Server Address** — Address of ASA network device that holds the MSS provisioned service profile and account status for the MSS

**N\_Neighbors** – Number of discovered neighbor BS

For each neighbor BS, the following parameters may be included,

**Neighbor BS-ID** – Same as the Base Station ID parameter in the DL-MAP message of neighbor BS

**Neighbor BS Operator ID** — the unique network ID shared by an association of BS; only include if different than Serving BS Operator ID

**Neighbor BS Physical Frequency** – DL center frequency (kHz).

**Neighbor BS S/(N + I)** – This parameter indicates the signal to noise and interference ratio measured by the MSS from the particular BS. The value shall be interpreted as an unsigned byte with units of 0.25dB.

**Neighbor BS Service level prediction** – This value indicates the level of service the MSS can expect from this BS. The following encodings apply:

0 = No service possible for this MSS; service level undetermined.

1 = Some service is available for the MSS.

2 = Service with QoS specified at ASA server (for the MSS identified by the 48-bit MAC address) is available.'

Remedy Action 6a:

[Add 11.1.9 MOB\_INF-RSP Message Encodings]

‘11.1.9 MOB\_INF-RSP Message Encodings

**Table 321a—MOB\_INF-RSP Encodings**

Name	Type (1 byte)	Length (1 byte)	Value (Variable-length)
Home Network ID	?	48 bits	Operator ID of default network to which MSS is associated
Authentication Server Address	?	48 bits	Address of ASA network device that holds the MSS provisioned service profile and account status for the MSS
N_Neighbors	?	8 bits	Number of discovered neighbor BS
For (j=0 ; j<N_NEIGHBORS ; j++) {			
Neighbor BS-ID	?	48 bits	Same as the Base Station ID parameter in the DL-MAP message of neighbor BS
Neighbor BS Operator ID	?	48 bits	the unique network ID shared by an association of BS
Neighbor BS Physical Frequency	?	32 bits	DL center frequency (kHz).
Neighbor BS S/(N + I)	?	8 bits	This parameter indicates the signal to noise and interference ratio measured by the MSS from the particular BS. The value shall be interpreted as an unsigned byte with units of 0.25dB
Neighbor BS Service level prediction	?	8 bits	This value indicates the level of service the MSS can expect from this BS. 0 = No service possible for this MSS/service level undetermined; 1 = Some service is available for the MSS; 2 = Service with QoS specified at ASA server (for the MSS identified by the 48-bit MAC address) is available
}			

Remedy Action 7:

To support dynamic neighbor table administration, need to add Neighbor\_Notification.request, Neighbor\_Notification.response, and Neighbor\_Notification.confirmation backbone messages to **Annex C.1**.

Also, need to add Neighbor\_Info backbone message to C.1 to periodically transfer Neighbor BS information between neighbor associated BS regardless of the mechanism employed to build the Neighbor BS table.

*[In C.1 Backbone network services, Table C1—Backbone Network Services, page 44, modify as:]*

for data row 2, ‘Provide a BS with the identity of its neighbors’, in column 2 ‘Possible Method for Providing service’, add third option ‘(3) Build list from MOB\_SS\_INF-RSP obtained from MSS’

*[In C.1 Backbone network services, change Table C1—Backbone Network Services, page 44, append the following rows to the end of the table:]*

Service	Possible Method for Providing service	Comments
Provide Neighbor Notification request	Sending BS notifies affiliated BS that Sending BS considers affiliated BS a Neighbor for Neighbor BS purposes	Message format and transport protocol need to be specified for interoperability.
Provide Neighbor Notification response	Affiliated BS response to Sending BS request for Neighbor BS designation	Message format and transport protocol need to be specified for interoperability.
Provide Neighbor Notification confirmation	Sending BS confirmation of Affiliated BS response to Sending BS request for Neighbor BS affiliation	Message format and transport protocol need to be specified for interoperability.

*[Add new sub-section to C.2 Inter-base station message formats:]*

#### **‘C.2.9 Neighbor\_Notification.request message**

An originating BS may send a Neighbor\_Notification.request to another BS indicating it considers the BS a Neighbor BS.

**Table C9—Neighbor\_Notification request message**

Field	Size	Notes
Global Header	152 bits	
Security Field	TBD	A means to authenticate this message
CRC Field	32 bits	IEEE CRC-32

Note: Need Management Message ID Number for Global Header

[Add new sub-section to **C.2 Inter-base station message formats:**]

**‘C.2.10 Neighbor\_Notification.response message**

A notified BS shall respond with a Neighbor\_Notification.response message confirming or denying a Neighbor\_Notification request. If the neighbor relationship is affirmed, both BS shall place each other on their dynamic Neighbor BS tables and begin aging timer (Neighbor-Aging-Timer, see Table 275a).

**Table C10—Neighbor\_Notification response message**

Field	Size	Notes
Global Header	152 bits	
ACK/NACK	1 bit	Acknowledgement or Negative acknowledgement. 0=Negative acknowledgement which means that the notified BS refuses to accept neighbor association with the originating BS 1=Acknowledgement which means that the notified BS accepts neighbor association with the originating BS
Security Field	TBD	A means to authenticate this message
CRC Field	32 bits	IEEE CRC-32

Note: Need Management Message ID Number for Global Header

[Add new sub-section to **C.2 Inter-base station message formats:**]

**‘C.2.11 Neighbor\_Notification confirmation message**

The originating BS shall confirm acknowledgement of receipt of the Neighbor\_Notification.response using a Neighbor\_Notification confirmation message.

**Table C11—Neighbor\_Notification confirmation message**

Field	Size	Notes
-------	------	-------

Global Header	152 bits	
Security Field	TBD	A means to authenticate this message
CRC Field	32 bits	IEEE CRC-32

Note: Need Management Message ID Number for Global Header

[Add new sub-section to *C.2 Inter-base station message formats*:]

#### ‘C.2.12 Neighbor\_Info message

Each BS may send a Neighbor\_Info message on periodic intervals (Neighbor\_Info interval, see Table 275a) to each other BS on its Neighbor BS table. Also, immediately following sending of a positive Neighbor\_Notification.response message, the notified BS shall send a Neighbor\_Info message to the originating BS of the Neighbor\_Notification request message.

**Table C12—Neighbor\_Info message**

Field	Size	Notes
Global Header	152 bits	
BS ID	48 bits	Base station unique identifier (Same number as that broadcasted on the DL-MAP message)
Operator ID	48 bits	Unique Network ID
Network Type	8 bits	0=not specified; 1=managed, restricted; 2=managed, provisional; 3=managed, unrestricted; 4=unmanaged, restricted; 5=unmanaged, provisional; 6=unmanaged, unrestricted; other=reserved
Time Stamp	32 bits	Number of milliseconds since midnight GMT (set to 0xffffffff to ignore)
BS Next Beacon	16 bits	Time interval in frames until next BS beacon event
BS Next Contention Network Entry	8 bits	Time interval in frames until next BS contention based MSS network entry interval; value=0 indicates feature not supported
BS Network Managed Handover Supported	1 bit	Binary 0=no; 1=yes
BS Air Interface Advertised Bandwidth	32 bits	In bits per second
BS Air Interface Available	32 bits	In bits per second

Bandwidth		
BS Backhaul Advertised Bandwidth	32 bits	In bits per second
BS Backhaul Available Bandwidth	32 bits	In bits per second
N_QoS_Records	8 bits	Number of AvailableQoSParamSet Records
For (j=0 ; j<N_QoS_Records ; j++) {		
Service Class Code	8 bits	Code of Service Class in AvailableQoSParamSet
}		
Security Field	TBD	A means to authenticate this message
CRC Field	32 bits	IEEE CRC-32

Note: Need Management Message ID Number for Global Header

[In 10.1 Global Values, Table 275a—Parameters and Constants, pages 34&40, append to table:]

System	Name	Time Reference	Min. Value	Default Value	Max. Value
BS	Neighbor_Info interval	Nominal time between transmission of Neighbor_Info messages			600s
BS	Neighbor-Aging-Timer	Nominal time for aging of BS neighbor association and removal from the dynamic Neighbor BS table	3600s		

## 2. Association

*Problem:*

I am not sure I see an important reason to keep Association as a distinct concept in the doc. The adoption of the changes to max power/initial power setting (this is a mandatory use item) in IEEE 802.16d/r2 6.2.9.5 provides a good shortcut method for curtailing lengthy Ranging negotiation--exactly Association's proposed function. Certainly, given that you would be using the IEEE 802.16d/r2 6.2.9.5 method during Ranging to get Association to begin with, IEEE 802.16d/r2 6.2.9.5 likely provides as good of a shortcut mechanism to minimize the Ranging negotiation interval during actual handover as Association is likely to provide.

*Remedy:*

Make ‘Association’ a passive function performed by MSS and attached to 6.4.9.5 Initial Ranging. Modify relevant section dedicated to Association. Eliminate MSS Association Channel ID TLV item for RNG-REQ. It serves no purpose since we have added Serving BS ID. As currently defined, MSS Association Channel ID requires ASA to implement and manage; unnecessary to maintain uniqueness. Correct several dire structural problems and omissions with 6.4.2.3.5, 6.4.2.3.6, 6.4.2.3.8 and supporting Tables.

*Remedy Action 1:*

*[Replace 1.4.1.2.1.3 Association Procedure in its entirety with:]*

**‘1.4.1.2.1.3 Association**

Association is an optional initial ranging parameter negotiation and MSS table notation maintenance procedure occurring during Initial Ranging of a BS. The Association relationship function is to memorialize MSS successful Scanning and Ranging of a BS for the purpose of expediting a potential future hand-over of the MSS to the then Target BS. MSS may store successful Ranging information for Associated BS for the purpose of setting initial Ranging values in a future Ranging event, possibly associated with a hand-over, to the Associated BS.

Upon completion of a successful MSS initial-ranging of a BS as specified in *IEEE P802.16-REVd/D1-2003 “Part 16: Air Interface for Fixed Broadband Wireless Access Systems”* section **6.4.9.5 Initial ranging and automatic adjustments** with the extensions specified in **11.1.3 RNG-REQ message encodings, Table 289a—RNG-REQ message encodings**, and **11.1.4 RNG-RSP message encodings, Table 290a—RNG-RSP message encodings**, if the RNG-RSP message contains a Service Level Prediction parameter set to 2, the MSS may mark the BS as Associated in its MSS local Association table of identities, recording elements of the RNG-RSP to the MSS local Association table, and setting an appropriate aging timer (See **Table 275a—Parameters and Constants**, ASC-AGING-TIMER). Association state in the MSS local Association table shall be aged-out after ASC-AGING-TIMER timeout and the Association entry removed.

While Association is current (aging timer has not expired), MSS may use recorded Associated Ranging values to set Initial Ranging values in a new initial Ranging event to the same Associated BS. An MSS may have several Associated BS in its local Association table concurrently and shall use the respective stored Associated Ranging values only with the related Associated BS.

Information on Association may be reported by the MSS to its Serving BS in periodic **6.4.2.3.52 MOS\_SS\_INF-RSP messages** to the Serving BS.’

*Remedy Action 2:*

*[In 10.1 Global Values, Table 275a—Parameters and Constants, pages 34&40, append to table:]*

System	Name	Time Reference	Min. Value	Default Value	Max. Value
--------	------	----------------	------------	---------------	------------

SS	Serving BS ID AGING-TIMER	Nominal time for aging of Serving BS association. Timer recycles on successful Serving BS DL-MAP read			5s
----	------------------------------	-------------------------------------------------------------------------------------------------------------------	--	--	----

*Remedy Action 3:*

*[In 6.4.2.3.5 Ranging Request (RNG-REQ) message, page 17, lines 9-12, delete from this location and modify and append to end of IEEE P802.16-REVd/D1-2003 “Part 16: Air Interface for Fixed Broadband Wireless Access Systems” section 6.4.2.3.5 Initial ranging and automatic adjustments, page 173, as:]*

**‘Serving BS ID**

for MSS during hand-over or network re-entry, the BS ID of the BS to which the MSS is currently connected (has completed complete registration cycle and is in Normal Operation). Serving BS ID shall not be included if interval timer is timed-out (Serving BS ID AGING-TIMER, see **Table 275a—Parameters and Constants**). Inclusion of Serving BS ID in the RNG-REQ message signals to the Target BS that the MSS is currently connected to the network through Serving BS and is in the process of either a hand-over or network re-entry.

**SFID**

for MSS during hand-over, network re-entry, or Association evaluation, one or more SFID of active Service Flow for which the MSS seeks determination of continued QoS support

**Service Flow encodings**

for MSS during hand-over, network re-entry, or Association evaluation, one or more Service Flow encodings as specified in 11.4.9 that define service performance criteria for each Service Flow, presented immediately succeeding the applicable Service Flow, such that Target BS may evaluate its ability to successfully provision the requested Service Flow, including:

**Service Class Name**

**Traffic priority**

**Maximum sustained traffic rate**

**Minimum traffic burst**

**Minimum reserved traffic rate**

**Service Flow scheduling type**

**Tolerated jitter**

**Maximum latency**

**Fixed-length versus variable-length SDU indicator**

**SDU size’**

*Remedy Action 4:*

*[In 6.4.2.3.6 Ranging Response (RNG-RSP) message, page 17, lines 19&20, modify as:]*

‘When a BS sends a RNG-RSP message in response to a RNG-REQ message containing one or more **SFIDs** and **Service Flow encodings**, the BS may include the following TLV parameters in the RNG-RSP message,’

*Remedy Action 5:*

*[In 11.1.3 RNG-REQ message encodings, replace Table 289a—RNG-REQ Message Encodings with:]*

**Table 289a—RNG-REQ Message Encodings**

Name	Type (1 byte)	Length (1 byte)	Value (Variable-length)
Serving BS ID	4	6	the BS ID of the BS to which the MSS is currently connected (has completed complete registration cycle and is in Normal Operation)
SFID	4	4	BS allocated unique Service Flow identifier as defined in 11.4.9.1
Service Flow encodings	?	<i>n</i>	Service Flow performance specific criteria as defined in 11.4.9

*Remedy Action 6:*

*[In 11.1.4 RNG-RSP message encodings, add new Table 290a—RNG-RSP Message Encodings:]*

**Table 290a—RNG-RSP Message Encodings**

Name	Type (1 byte)	Length (1 byte)	Value (Variable-length)
Service Level Prediction	4	1	value indicates the level of service the MSS can expect from this BS.

*Remedy Action 7:*

*[In IEEE P802.16-REVd/D1-2003 “Part 16: Air Interface for Fixed Broadband Wireless Access Systems” section 6.4.9.5 Initial ranging and automatic adjustments, page 173, insert the following between lines 27 & 29:]*

‘For MSS that are employing the optional Association procedure, and to which the MSS and BS are currently Associated, the MSS may use its un-expired, previously obtained and retained associated Ranging values to set initial ranging values including  $P_{TX\_IR\_MAX}$  power levels.’

### 3. Scanning, Ranging, and Sleep

#### *Problem:*

The fact that we have created a logical separation/use distinct between 'sleep' mode and 'scanning' mode seems unnecessary. When determining whether differentiating mechanically, I think it best to look at impact on the Serving BS and network when assessing the importance of maintaining a logical distinction. All the network cares is that the MSS is 'unavailable' during the described interval, for whatever reason, and that the Serving BS should not schedule any DL/UL slots addressed to the MSS. What the MSS does during that interval of absence is irrelevant to the Serving BS and network and does not affect the mechanics of the standard.

There is benefit to unifying the two concepts for performance reasons, as well as conceptually. We spent some time at the last meetings talking about re-synchronization on timing for MSS returning from 'sleep' mode. We did not make similar correction for MSS returning from 'scanning' mode. By combining the allocation mechanism for both under the 'sleep' mode rules we effectively eliminate that problem for 'scanning', and any other logical use, as well.

Finally, we also made changes to SLP-REQ allowing for single iteration 'sleep' intervals which, in instances where a single 'sleep' interval is specified, eliminates the need for a TRF-IND. And there is need to support a succession of same-duration sleep intervals to support a series of Scanning and/or Ranging events while allowing the MSS to return and 'listen' during interleaving intervals. The geometric algorithm currently proposed in 16eR4 precludes this procedure and require a succession of repetitive SLP-REQ/RSP actions that can be avoided by a minor reconfiguration of the algorithm.

#### *Remedy:*

Delete the separate rules allocation for Scanning. Expand the definition and rules for 'Sleep' mode to be more flexible and generalized as an MSS 'Unavailable' period. Create an appropriate aging timer for Serving BS to consider connection to MSS in 'Sleep' mode lost.

#### *Remedy Action 1:*

*[Delete 1.4.1.2.1.2 MSS Scanning of neighbor BS in its entirety.]*

#### *Remedy Action 2:*

*[Delete 6.4.2.3.45 Scanning Interval Allocation Request (MOB\_SCN-REQ) message in its entirety.]*

#### *Remedy Action 3:*

*[Delete 6.4.2.3.46 Scanning Interval Allocation Response (MOB\_SCN-RSP) message in its entirety.]*

Remedy Action 4:

omitted

Remedy Action 5:

[In 6.4.2.3.41 Sleep Request message (MOB\_SLP-REQ), replace Table 84a—Sleep-Request (MOB\_SLP-REQ) message format with:]

‘Table 84a—Sleep-Request (MOB\_SLP-REQ) message format

Syntax	Size	Notes
MOB_SLP-REQ_Message_Format() {		
Management Message Type=45	8 bits	
reserved	2 bits	
initial-sleep-window	6 bits	
Sleep-window-factor	4 bits	
Final-sleep-window	10 bits	
Sleep-window-iterations	10 bits	
}		

[In 6.4.2.3.41 Sleep Request message (MOB\_SLP-REQ), paragraph 2, replace current paragraph with:]

‘Parameters shall be as follows:

**initial-sleep-window**

Requested start value for sleep-window for the sleep-interval (measured in frames).

**sleep-window-factor**

Multiplying factor for increasing the sleep-window value through multiple sleep-window-iterations

**final-sleep-window**

Requested maximum sleep-window value for the sleep-interval (measured in frames).

**sleep-window-iterations**

Number of iterations of sleep-window to perform prior to completing sleep-interval’

[In 6.4.2.3.42 Sleep Response message (MOB\_SLP-RSP), replace paragraph 1 and Table 84b—Sleep-Response (MOB\_SLP-RSP) message format with:]

The MOB\_SLP-RSP message shall be sent from a Serving BS to an MSS on the MSS’s basic CID in response to an MOB\_SLP-REQ message, or may be sent unsolicited. The MSS shall enter sleep-mode using the parameters indicated in the message. In the case where sleep is denied, it is recommended that the Serving BS

provide unsolicited MOB\_SLP-RSP before the expiration of the time interval specified by the REQ-duration field.

**Table 84b—Sleep-Response (MOB\_SLP-RSP) message format**

Syntax	Size	Notes
MOB_SLP-RSP_Message_Format() {		
Management Message Type=46	8 bits	
Sleep approved	1 bit	0: Sleep-mode request denied 1: Sleep-mode request approved
If (Sleep-approved == 0) {		
After-REQ-action	3 bits	000: The MSS may retransmit the MOB_SLP-REQ message at any time 001: The MSS may retransmit the MOB_SLP-REQ message after the time duration (REQ-duration) given by the BS in this message 010: The MSS shall not retransmit the MOB_SLP-REQ message and shall await an unsolicited MOB_SLP-RSP message from the BS 011:111: Reserved
REQ-duration	4 bits	Time duration for case where After-REQ-action value is 001.
} else {		
Reserved	3 bits	
Start frame	7 bits	lower byte of the frame number in which the MSS shall enter into sleep-mode
initial-sleep-window	6 bits	
sleep-window-factor	4 bits	
final-sleep-window	10 bits	
sleep-window-iterations	10 bits	
}		
}		

*[In 6.4.2.3.42 Sleep Response message (MOB\_SLP-RSP), paragraph 2, replace current paragraph with:]*

Parameters shall be as follows:

**Sleep approved**

Response indication whether or not MSS request to enter sleep-mode has been approved by the BS.

- 0: Sleep-mode request denied
- 1: Sleep-mode request approved

**After-REQ-action**

On MSS request to enter sleep-mode rejected by the BS, indicates recourse action.

- 000: The MSS may retransmit the MOB\_SLP-REQ message at any time
- 001: The MSS shall retransmit the MOB\_SLP-REQ message after the time duration (REQ-duration) given by the BS in this message
- 010: The MSS shall not retransmit the MOB\_SLP-REQ message and wait the MOB\_SLP-RSP message from the BS
- 011:111: Reserved

**REQ-duration**

Waiting value for the MOB\_SLP-REQ message re-transmission (measured in frames)

**Start-frame**

Lower byte of the frame number in which the MSS shall enter into sleep-mode.

**initial-sleep-window**

Start value for sleep-window for the sleep-interval (measured in frames).

**sleep-window-factor**

Multiplying factor for increasing the sleep-window value through multiple sleep-window-iterations

**final-sleep-window**

Maximum sleep-window value for the sleep-interval (measured in frames).

**sleep-window-iterations**

Number of iterations of sleep-window to perform prior to completing sleep-interval.'

*[In 6.4.16 Sleep-mode for mobility-supporting MSS, 6.4.16.1 Introduction, pages 26&27, paragraphs 1 thru 10, replace current section with:]*

‘Sleep-mode is a mode in which MSS’s supporting mobility may power down, scan neighbor and foreign network BS, range neighbor and foreign network BS, conduct hand-over/network re-entry, or perform other activities for which the MSS will be unavailable to the Serving BS for DL or UL traffic. Sleep-mode is intended to enable mobility-supporting MSS to minimize their power usage and facilitate hand-over decision and operation while staying connected to the network; but sleep-mode use should not be narrowly interpreted. Implementation of sleep-mode is optional.

An MSS in sleep-mode shall engage in a sleep-interval, defined as a time duration, measured in whole frames, where the MSS is in sleep-mode. The sleep-interval is constructed of one or more variable-length, consecutive sleep-windows, with interleaved listening-windows, through one or more sleep-window-iterations. During a sleep-window, an MSS does not send or receive PDUs, has no obligation to listen to DL traffic and may power-down one or more physical operation components. During a listening-interval, an MSS shall synchronize with the Serving BS downlink and listen for an appropriate MOB\_TRF-IND traffic indication message. The MSS shall decide whether to stay awake or go back to sleep based on a positive MOB\_TRF-IND from the Serving

BS. The listening-window parameter is reported to the MSS in REG-RSP. During consecutive sleep-windows and listening-windows, comprising a single sleep-interval, sleep-window shall be updated using an increasing algorithm as defined in 6.4.16.2 Sleep-window update algorithm.

Before entering sleep-mode the MSS shall inform the BS using MOB\_SLP-REQ and obtain its approval. Serving BS shall respond with a MOB\_SLP-RSP message. Serving BS may send an unsolicited MOB\_SLP-RSP to MSS to initiate MSS sleep-mode. Upon Serving BS transmittal of an affirming MOB\_SLP-RSP, Serving BS shall initiate aging timer (MSS Sleep-Aging-Timer, see Table 275a) to coincide with initiation of sleep-interval at start-frame. After receiving an MOB\_SLP-RSP message from the BS, an MSS shall enter sleep-mode by beginning sleep-interval at the appropriate frame proscribed by start-frame.

An MSS shall awaken, enter into an interleaved listening-window, according to the sleep-interval and check whether there were PDUs addressed for it. The listening-window parameter defines the number of whole frames the MSS shall remain awake waiting for a MOB\_TRF-IND message. Traffic indication message (MOB\_TRF-IND) shall be sent by the BS on the broadcast CID during each appropriate MSS listening-window. If the number of positive indications is zero, the BS sends an empty indication message, that is, MOB\_TRF-IND message with num-positive=0. The BS may buffer (or it may drop) incoming PDUs addressed to the sleeping MSS, and shall send notification to the MSS in its listening-window about whether data has been addressed for it during a preceding interval. If such PDUs exist, the MSS shall remain awake, terminating the sleep-interval and re-entering Normal Operation.

An MSS may terminate sleep-mode and return to Normal Operation anytime (i.e. there is no need to wait until the sleep-interval is over). If a Serving BS receives a PDU from an MSS that is supposed to be in sleep-mode, the BS shall assume that the MSS is no longer in sleep-mode. Any UL message from the MSS to the Serving BS shall interrupt the sleep-interval, shall signal the Serving BS that the MSS is still active and connected and has not dropped connection during its sleep-interval, and the Serving BS shall terminate the aging timer (MSS Sleep-Aging-Timer, see Table 275a).

Upon completion of sleep-interval, the MSS shall awaken and return to Normal Operation. .

If the intervening interval of MSS absence exceeds the aging timer, then the Serving BS shall assume loss of connection to the MSS and process as if it had received a backbone message announcing another BS becoming the Serving BS for the specified MSS (see section Backbone network HO procedures).<sup>7</sup>

*[In 10.1 Global Values, Table 275a—Parameters and Constants, pages 39&40, append row to table:]*

System	Name	Time Reference	Min. Value	Default Value	Max. Value
BS	MSS Sleep-Aging-Timer	Nominal time for aging of MSS Sleep disconnect.			10500s

*[In 6.4.16.2 Sleep-interval update algorithm, page 34, paragraph 1, replace current paragraph with:]*

‘The MSS shall use the following algorithm for calculating the sleep-window duration, in whole frames, for performing the sleep-interval:

$$\left\{ \begin{array}{l} I_k = \min \{ \text{initial-sleep-window} + \text{initial-sleep-window} \cdot \text{sleep-window-factor} \cdot (k-1), \\ \text{final-sleep-window} \} \quad k > 0, k < \text{sleep-window-iterations} \end{array} \right.$$

```

For (j=0 ; j<sleep-window-iterations ; j++) {
  sleep-window = initial-sleep-window + initial-sleep-window * (sleep-window-factor * (j -
1))
  If (sleep-window > final-sleep-window) {
    sleep-window = final-sleep-window
  }
  Process MSS sleep for sleep-window duration
  If (sleep-window-iterations > 1) {
    Process MSS listening for listening-window duration
  }
}

```

Upon completion of sleep-interval, MSS and BS shall return to Normal Operation.’

*[In 6.4.16.3 Traffic indication signaling, page 35, replace current paragraphs with:]*

‘A BS shall notify each MSS in sleep-mode, during its listening-window, if traffic has been addressed to the MSS during any sleep-window iteration. The indication is sent on the MOB\_TRF-IND broadcast message. The MSS shall examine the frame number from the PHY Synchronization Field during each listening-window and shall verify synchronization with the BS. If the expected frame number is different than the discovered frame number, the MSS shall return into awake mode, Normal Operation. Similarly, if the MSS does not find the expected MOB\_TRF-IND broadcast message, the MSS shall return to Normal Operation.

If the MSS does not find any positive indication with its CID in the MOB\_TRF-IND message, or no CID in the MOB\_TRF-IND message matches the MSS’s basic CID, it shall consider this as a negative indication and shall continue in sleep-. For an example of sleep-mode operation, see Annex D.’

*[In 10.1 Global Values, Table 275a—Parameters and Constants, pages 39&40, modify as:]*

delete the first row and second row of data entirely: Min\_sleep\_interval, Max\_sleep\_interval. Insert new row: ‘sleep-window’ with Min Value of ‘4 Frames’ and Max Value of ‘1024 Frames’. This will appropriately constrain the computed sleep-window value.

Sleep-interval maximum duration is appropriately constrained by virtue of the max values of its constituent variables. Max sleep-interval calculates as 1,051,712 frames under current constraints. This will probably equal to about 5,258 seconds, or about 87 minutes, which should be acceptable. Should this number be seen as

too high, it is far preferable to reduce the bit size of some of the constituent variables to reduce sleep-interval maximum.


*[In 10.1 Global Values, Table 275a—Parameters and Constants, pages 39&40, modify as:]*

Change ‘Listening-interval’ to ‘Listening-window’. Set Min Value for Listening-window to 4. Listening window is now being set as a global variable expressed as a REG-RSP TLV through **11.4.14.1 Listening Window**.

*[In 11.4.14.1 Listening Interval, pages 43, modify as:]*

Replace all instances of ‘interval’ with ‘-window’

*[In Annex D.2, page 61, replace **Figure D.10** with:]*

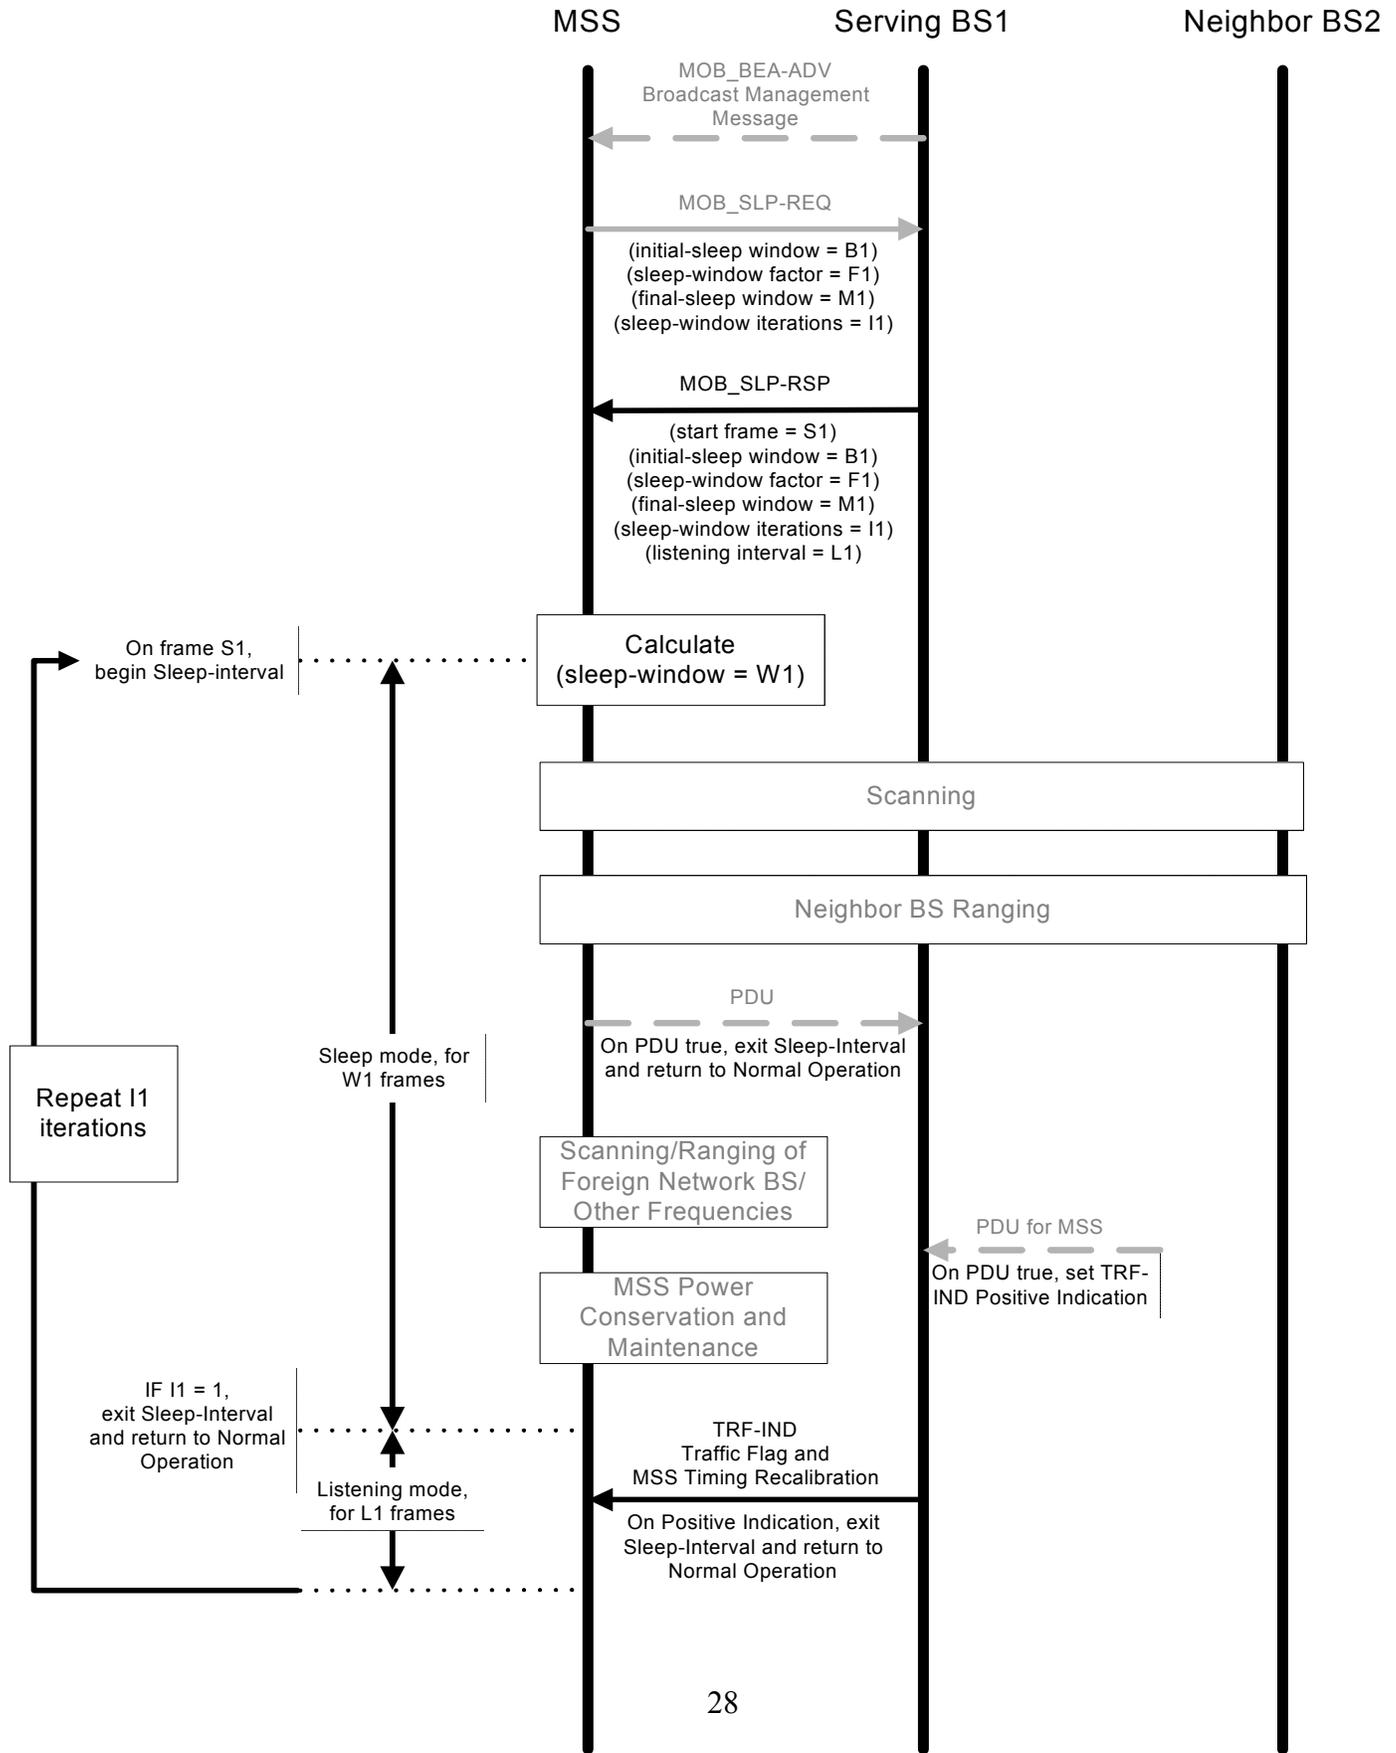

*[In Annex D.2, pages 62 & 63, delete **Figures D.11 and D.12** entirely]*

#### 4. Hand-over

*Problem:*

As currently defined, mechanics for hand-over are incomplete or poorly defined. Elements are out of order. Specifically, too many HO process elements are unnecessarily made 'mandatory' instead of 'optional', impose excessive amounts of overhead not providing additional functionality or security to the HO process, are excessively restrictive instead of being enabling and permissive, and fail to take advantage of opportunities for corrective or recovery actions that would streamline and increase the utility and robustness of the HO process.

*Remedy:*

Revise hand-over process.

*Remedy Action 1:*

The language in the introductory paragraph for Network Reference Model for Mobile Communications is unnecessarily restrictive.

It is entirely possible to have smaller private mobile networks, say, using Mobile IP to facilitate a campus mobile network. Also, these networks may be partially or completely 'unmanaged', that is to say not a sophisticated AAA support system on the backbone, not a sophisticated hand-over management infrastructure. And there should be some discussion of the core concept that defines a 'mobile' network, that is MSS performing intra- or inter-network hand-overs. Soft hand-overs are Persistence of Active Service Flows during relocation of network attachment point.

*[In 1.4.1.1 Network reference model, 1.4.1.1.1 Entities, page 3, paragraph 1, replace paragraph with:]*

'The network reference model consists of BS units providing contiguous/non-contiguous service coverage across a distributed geographic region where the BS units are connected by a backbone network and share network affiliation. The reference network may be public or private, managed or unmanaged, restricted entry or open connection. Multiple networks, of varying design and performance and operated by disparate operators may coexist in the same geography. Depending on the relationship of the varying operators, configuration of the networks, operational deployment, etc..., MSS may perform uninterrupted, persistent active service flow hand-over (soft hand-over) or interrupted, non-persistent active service flow hand-over (hard hand-over) between BS on the same or disparate networks. Hand-overs may be intra- or inter-network. Hand-over management may be centrally controlled or employ a distributed decision mechanism, or some combination thereof. Backbone networks may employ sophisticated centralized AAA (Authorization, Authentication and Accounting), management, provisioning or other specialized servers. Specifically, those servers responsible for authentication and service authorization are collectively referred to as ASA-server(s) and may be single, multiple, centralized or distributed. The operation of these servers with the BS and MSS is specified to the extent of defining the control messages.'

*Remedy Action 2:*

Language problems with paragraph. Correct reference to Association.

*[In 1.4.1.1.4 MSS Service Context, page 6, paragraph 1&2, replace with:]*

'In the mobile environment, certain Service Flows are provisioned for each MSS. QoS parameters are provisioned by the operator for each flow and identified by certain Service Class names. Set of Service Classes should be provisioned through upper layers (e.g. network management) at each BS and each MSS.

For each SU certain AuthorizedQoSParamSet shall be provisioned identified by the corresponding Service Class name. In the initial Network Entry, Ranging and Hand-over processes, MSS shall request from the Target BS certain QoS levels per Active Service Flow, differentiated by Service Class and represented by AuthorizedQoSParamSet. The BS shall respond with name of Service Class available for the Service Flow. This Service Class will become AdmittedQoSParamSet in the case of successful Network Entry/HO.'

*Remedy Action 3:*

In **1.4.1.1.4 MSS Service Context**, page 6, paragraph 3, lines 1, 2, 3, and 4, and **Table 1d**

Inappropriate references to 'permanent IP address' and association of a 'permanent IP address' with the MSS home attachment point for Mobile IP.

Inappropriate reference to 6.4.14 Dynamic Frequency Selection

Two requirements here that are being improperly bound and creating confusion:

- 1) No requirement for a 'permanent IP address' in 6.4.9; don't need it for mobility
- 2) Need network 'MSS Home Network address' referencing the home address attachment point for Mobile IP and other traffic forwarding mobility models

*Remedy Action 4:*

*[In 1.4.1.1.4 MSS Service Context, page 6, paragraph 3, sentences 1 thru 4 & Table 1d, replace with:]*

'Network Service is defined as a service provided to the MSS by the network through a single persistent IP address with particular connectivity and air-interface MAC parameters (including QoS properties). A MSS persistent IP address is defined as an MSS network connection address as allocated in 6.4.9.10 for as long as it remains persistent on the network. Connectivity properties, including Home Network address, are defined by specification in the MSS Configuration file in 6.4.9.12. The permanent IP address defines the MSS home-network. QoS properties are those of Service Flow associated with the network service, as specified in 6.4.13.'

*Remedy Action 5:*

*[In 1.4.1.1.4 MSS Service Context, page 6, Table 1d, row 2, change reference:]*

Replace 'Address of MSS at Home Network' with 'MSS Home attachment address'

Replace 'IP address of MSS at its Home Network. This address does not change while MSS travels from one BS to another' with 'MSS static configured home attachment point address for traffic forwarding mobile addressing model.'

*Remedy Action 6:*

*[Add new section TLV to 11.3 Configuration file encodings:]*

**‘11.3.7 MSS Home Attachment address:**

For mobile enabled networks, MSS Home Attachment address defines the static reference address location for traffic forwarding mobility models

Type	Length	Value
??	4 or 16	IP Address

*Remedy Action 7:*

Adding to, correcting language and structure for hand-over. Unifying hand-over/network initial entry/network re-entry into a single, rule based process with multiple correction opportunities, a more robust failure recovery mechanism, and lower air interface and backhaul overhead.

*[In 1.4.1.2.2 HO process, page 8, paragraphs 1 thru 4, replace with:]*

‘The section defines the HO process in which an MSS migrates from the air-interface provided by one BS to the air-interface provided by another BS. The HO process consists of the stages:

**Cell Selection** — MSS may use Neighbor BS information acquired from a decoded MOB\_BEADV message, or may make uninformed decision, to schedule sleep-intervals to scan, and possibly range, Neighbor BS for the purpose of evaluating MSS interest in hand-over to potential Target BS. MSS may provide results of its scanning and ranging activity to Serving BS through MOB\_SS\_INF-RSP.

**HO Decision** — a hand-over begins with a decision for an MSS to hand-over its air interface, service flow, and network attachment from a Serving BS to a Target BS. The decision may originate either at the MSS, the Serving BS, or on the network. The HO Decision consummates with a notification of MSS intent to hand-over through MOB\_XXXHO-REQ. The HO notification is recommended, but not required. The HO notification may originate with either the Serving BS or MSS. Acknowledgement with MOB\_XXXHO-RSP of a notification is required.

**Backbone HO Notification** — Serving BS may notify Target BS(s) over the backbone network of MSS intent to hand-over to Target BS (see section Backbone network HO procedures). Serving BS may also send MSS information over the backbone that can expedite hand-over. If Target BS receives a backbone notification message, subsequent backbone HO notification response and confirmation messages are recommended, but not required.

**Sleep** — the MSS shall use sleep-interval to establish a working ‘unavailable’ service window with Serving BS to conduct network re-entry with Target BS. This mechanism permits continued service with the Serving BS should the hand-over attempt fail or be aborted. The MSS shall send a MOB\_SLP-REQ sleep request message, or Serving BS may send an unsolicited MOB\_SLP-RSP sleep response message. The burden for message origination lies with the party that originated MOB\_xxxHO-REQ hand-over request. If MSS sends MOB\_SLP-REQ, then Serving BS MOB\_SLP-RSP is required. An MSS may continue the HO process even if the Serving BS fails to respond to a MOB\_SLP-REQ, but not if MOB\_SLP-RSP denies the sleep request. If denied, the MSS may re-attempt a MOB\_SLP-REQ at the appropriate interval. If an MSS operational parameter changes after MOB\_HO-REQ but prior to start-frame of an approved sleep-interval, MSS must abort the hand-over attempt, return to HO Decision, and re-notify the Serving BS of intent to hand-over.

**Target BS Scanning** — MSS shall scan Target BS for downlink channel & synchronization and uplink channel & synchronization. If MSS had previously decoded a MOB\_BEADV message including Target BS ID, Physical Frequency, DCD and UCD, then the scanning and synchronization process may be shortened. If the Target BS had previously received HO notification from Serving BS over the backbone (see section Backbone network HO procedures), then Target BS may place a non-contention based Fast\_UL\_ranging\_IE MSS Initial Ranging opportunity in the UL-MAP. MSS shall scan Target BS for UL-MAP that includes either a contention or non-contention based MSS Initial Ranging opportunity.

**Network Re-entry** — MSS and Target BS shall conduct Ranging per 6.2.9.5 to begin network re-entry. If MSS RNG-REQ includes an unexpired Serving BS ID and Target BS had not previously received MSS information over the backbone (see section Backbone network HO procedures), then Target BS may make an MSS information request of Serving BS over the backbone network and Serving BS may respond. Regardless of having received MSS information from Serving BS, Target BS may request MSS information from an Authorizing Station via the backbone network. Network re-entry proceeds per 6.2.9.5 except as may be shortened by Target BS possession of MSS information obtained from Serving BS over the backbone network. Network re-entry process completes with establishment of MSS normal operations.

**Termination of Service** — The final step in hand-over is any termination of MSS services with previous Serving BS. If Target BS had received a HO notification from Serving BS over the backbone (see section Backbone network HO procedures), or MSS RNG-REQ included an unexpired Serving BS ID, then Target BS may send a HO complete/Serving BS notification message over the backbone network to the Serving BS and any Authorizing Station. HO acknowledgement is recommended, but not required.

Upon receipt of a HO complete/Serving BS notification message, Serving BS shall terminate all connections belonging to the MSS and the context associated with them (i.e. information in queues, ARQ state-machine, counters, timers, etc..., is discarded). Target BS now becomes the new Serving BS for all purposes.

The HO process, and its similarity to the initial network entry process, is depicted in Figure 0f.'

*Remedy Action 8:*

*[In 1.4.1.2.2.1 Cell Selection, pages 9&10, paragraph 1, replace with:]*

'Cell selection refers to the process of an MSS Scanning and/or Ranging one or more BS in order to determine suitability, along with other performance considerations, for network connection or hand-over. MSS may incorporate information acquired from a MOB\_BEADV message to give insight into available Neighbor BS for cell selection consideration. If currently connected to a Serving BS, an MSS shall schedule sleep-intervals to conduct Cell Selection for the purpose of evaluating MSS interest in hand-over to potential Target BS. Such procedure does not involve termination of existing connections to a Serving BS and their re-opening in a Target BS. If ranging a Target BS for hand-over, any newly assigned basic and primary CIDs are specific to the Target BS and do not replace or supplant the basic and primary CIDs the MSS employs in its communication with its Serving BS. MSS may provide results of its scanning and ranging activity to Serving BS through MOB\_SS\_INF-RSP.'

*Remedy Action 9:*

*[In 1.4.1.2.2.2 HO initiation, pages 10&11, paragraph 1 thru 4, replace with:]*

'Either an MSS or a BS may initiate a HO by transmitting the MOB\_MSSHO-REQ or MOB\_BSHO-REQ MAC messages. Transmission of the MOB\_XXXHO-REQ MAC message is recommended, but not required.

When MOB\_MSSHO-REQ is sent by an MSS, the MSS may indicate one or more possible Target BS. When MOB\_BSHO-REQ is sent by a Serving BS, the Serving BS may indicate one or more recommended Target BS. Serving BS criteria for recommendation of Target BS may include factors like expected Target BS QoS performance to MSS requirements. The MOB\_MSSHO-REQ message may include an indication of the estimated time for performing the HO. Acknowledgement with MOB\_XXXHO-RSP of a MOB\_XXXHO-REQ notification is required. MSS actual pursuit of hand-over to Target BS in MOB\_XXXHO-RSP is recommended, but not required. MSS may elect to attempt hand-over to a different Target BS, a Target BS that may or may not have been included in MOB\_XXXHO-RSP, with the understanding that the different Target BS may not receive notification of the pending hand-over from the Serving BS over the backbone network prior to MSS initial Ranging of Target BS (see section Backbone network HO procedures). If the MSS signals rejection of Serving BS instruction to HO through HO\_type field in the MOB\_MSSHO-RSP set value of 10 (HO reject option), the BS may reconfigure the Target BS list and retransmit MOB\_BSHO-RSP message including a new Target BS list.

Serving BS may notify one or more Target BS over the backbone network of MSS intent to hand-over to Target BS (see section Backbone network HO procedures). Serving BS may also send MSS information to Target BS over the backbone that can expedite hand-over. If Target BS receives a backbone notification message, subsequent backbone HO notification response and confirmation messages, including expected post-hand-over MSS performance levels, are recommended, but not required.

After an MSS or BS has indicated intent to HO using MOB\_xxxHO-REQ, the MSS may cancel the HO at any time prior to transmission of MOB\_SLP-Rxx. The cancellation may be made through transmission of a MOB\_HO-IND with the HO cancel option (HO Type=01) or through the transmission of a new MOB\_xxxHO-REQ message.'

*Remedy Action 10:*

*[In 1.4.1.2.2.3 HO cancellation, page 11, relocate text to 1.4.1.2.2.2 HO initiation, replace entire section with:]*

#### **'1.4.1.2.2.3 Sleep and Hand-over**

The MSS shall use sleep-interval to establish a working 'unavailable' service window with Serving BS to conduct scanning, initial ranging and HO/network re-entry with Target BS. This mechanism permits continued service with the Serving BS should the hand-over attempt fail or be aborted. The MSS shall send a MOB\_SLP-REQ sleep request message, or Serving BS may send an unsolicited MOB\_SLP-RSP sleep response message. The burden for message origination lies with the party that originated MOB\_xxxHO-REQ hand-over request. If no MOB\_xxxHO-REQ message was issued, then the requirement falls to the MSS. If MSS sends MOB\_SLP-REQ, then Serving BS MOB\_SLP-RSP is required. An MSS may continue the HO process even if the Serving BS fails to respond to a MOB\_SLP-REQ, but not if MOB\_SLP-RSP denies the sleep request. If denied, the MSS may re-attempt a MOB\_SLP-REQ at the appropriate interval.

If an MSS operational parameter changes after MOB\_xxxHO-REQ but prior to start-frame of an approved sleep-interval, MSS must abort the hand-over attempt, return to HO Decision, and re-notify the Serving BS of intent to hand-over.

MSS may abort the hand-over attempt at any time, for any reason, by aborting the sleep-interval and returning to Normal Operation with its Serving BS.

Serving BS shall treat any uplink PDU from MSS after BS transmittal of an activating MOB\_SLP-RSP as cancellation of any pending MSS HO as if the MSS had transmitted MOB\_HO-IND with the HO cancel option.'

*Remedy Action 11:*

*[In 1.4.1.2.2.4 Termination with the serving BS, page 11, relocate text to 1.4.1.2.2.2 HO initiation, replace entire section with:]*

#### ‘1.4.1.2.2.4 Scanning of Target BS

During the sleep-interval attributed to hand-over, MSS shall scan Target BS for downlink channel & synchronization and uplink channel & synchronization. If MSS had previously decoded a BEA-ADV message including Target BS ID, Physical Frequency, DCD and UCD, then the scanning and synchronization process may be shortened. If the Target BS had previously received HO notification from Serving BS over the backbone (see section Backbone network HO procedures), then Target BS may place a non-contention based MSS Initial Ranging opportunity using the PHY dependent Fast\_UL\_ranging\_IE() (see 8.3.1.5.5.3.3 Fast ranging (Paging) Information Element, 8.4.6.3.4 Fast ranging (Paging) Information Element, and 8.5.5.3.5 & 8.5.5.3.6 Fast ranging (Paging) Information Element) in the UL-MAP. MSS shall scan Target BS for UL-MAP that includes either a contention or non-contention based MSS Initial Ranging opportunity.’

*Remedy Action 12:*

*[In 1.4.1.2.2.5 HO rejection, page 11, relocate text to 1.4.1.2.2.2 HO initiation, replace entire section with:]*

#### ‘1.4.1.2.2.5 Network Entry/Re-entry

Unless otherwise excepted in this section, MSS mobile network entry/re-entry is processed according to **6.4.9 Network entry and initialization**. For purposes of this process, MSS network re-entry and hand-over are synonymous.

During its sleep-interval or at MSS initial entry, MSS and Target BS shall conduct Ranging per **6.4.9.5 Initial ranging and automatic adjustments** to begin network entry/re-entry except as MSS may take advantage of a non-contention based MSS Initial Ranging opportunity if present. If MSS RNG-REQ includes an unexpired Serving BS ID and Target BS had not previously received MSS information over the backbone (see section Backbone network HO procedures), then Target BS may make an MSS information request of Serving BS over the backbone network and Serving BS may respond. Regardless of having received MSS information from Serving BS, Target BS may request MSS information from an Authorizing Station via the backbone network. Network re-entry proceeds per **6.4.9.5 Initial ranging and automatic adjustments** except as may be shortened by Target BS possession of MSS information obtained from Serving BS over the backbone network.

If Target BS had previously received an MSS-Info response message (see section Backbone network HO procedures) containing MSS information, Target BS may use the embedded TLV SBC-REQ information to build and send an unsolicited SBC-RSP message to MSS. Target BS may ignore only the first SBC-REQ message received if it sends an unsolicited SBC-RSP message. MSS is not required to send an SBC-REQ if it receives an unsolicited SBC-RSP prior to MSS attempt to send SBC-REQ.

If MSS RNG-REQ included an unexpired Serving BS ID and Target BS had previously received an MSS-Info response message (see section Backbone network HO procedures) containing MSS information, MSS and Target BS shall use the embedded TLV PKM-REQ information and the re-authorization process as defined in **7.2 PKM protocol**.

If Target BS had previously received an MSS-Info response message (see section Backbone network HO procedures), Target BS may use the embedded TLV REG-REQ & DSA-REQ information to build and send an unsolicited REG-RSP message. The REG-RSP message may include the SFID, New\_CID, and Connection\_Info TLVs. Target BS may ignore only the first REG-REQ message received if it sends an unsolicited REG\_RSP message. MSS is not required to send an REG-REQ if it receives an unsolicited REG-RSP prior to MSS attempt to send REG-REQ.

If Target BS had previously received an MSS-Info response message (see section Backbone network HO procedures) that included the MSS Network Address in the embedded TLV, and provided that MSS Network Address is compatible with Target BS network addressing scheme, Target BS may skip most of the Network Address allocation process and re-provision the same address through an unsolicited Network Address Response. Target BS may ignore only the first Network Address discover message received if it sends an unsolicited Network Address response message. MSS is not required to send an Network Address discover if it receives an unsolicited Network Address response prior to MSS attempt to send Network Address discover.

If MSS RNG-REQ included an unexpired Serving BS ID, MSS and Target BS may skip Time of day process.

If MSS RNG-REQ included an unexpired Serving BS ID, MSS may skip the MSS configuration file download procedure.

If MSS received a REG-RSP message that included the SFID, New\_CID, and Connection\_Info TLVs, MSS and Target BS may skip the establish connections procedure.

Network entry/re-entry process completes with establishment of MSS normal operations.’

*Remedy Action 13:*

*[Add new section 1.4.1.2.2.6 Termination of Service:]*

#### **‘1.4.1.2.2.6 Termination of Service**

The final step in hand-over/network re-entry is any termination of MSS services with previous Serving BS. If Target BS had received a HO notification from Serving BS over the backbone (see section Backbone network HO procedures), or MSS RNG-REQ included an unexpired Serving BS ID, then Target BS may send a HO complete/Serving BS notification message over the backbone network to the Serving BS and any Authorizing Station. HO acknowledgement is recommended, but not required. Upon receipt of a HO complete/Serving BS notification message, Serving BS shall terminate all connections belonging to the MSS and the context associated with them (i.e. information in queues, PDUs, ARQ state-machine, counters, timers, etc...). Regardless of transmittal of a HO complete/Serving BS notification message or its acknowledgment, Target BS now becomes the new Serving BS for all purposes.’

*Remedy Action 14:*

*[In 6.4.2.3.6 Ranging Response (RNG-RSP) message, page 17, lines 43-58, modify, relocate and insert as new paragraph prior to line 19, IEEE P802.16-REVd/D1-2003 “Part 16: Air Interface for Fixed Broadband Wireless Access Systems”, 6.4.2.3.8 Registration Response (REG-RSP) message:]*

‘For mobile networks, Target BS shall include SFID, New\_CID, and Connection\_Info TLVs in the REG-RSP for MSS recognized by the Target BS as performing HO or network re-entry by the presence of an unexpired Serving BS ID in the RNG-REQ. SFID, New\_CID, and Connection\_Info TLVs provide a shorthand method for renewing active connections used by the MSS in its previous Serving BS. The TLVs specify CID in the Target BS that shall replace active CID used in the previous Serving BS. Multiple iterations of these TLVs may occur in the REG-RSP suitable to re-creating and re-assigning all active Service Flows for the MSS from its previous Serving BS. If any of the Service Flow parameters change, then those Service Flow parameters and CS parameter encoding TLVs that have changed will be added. Only active Service Flows are transferred in this manner. These TLVs enable the Target BS to renew connections used in the previous Serving BS, but with different QoS settings.’

*Remedy Action 15:*

*[In 11.1.4 REG-RSP TLVs for connection re-establishment, page 41, relocate, re-format and modify as:]*

#### 11.4.14 TLV Encodings for Service Flow connection re-establishment during hand-over

##### 11.4.14.1 SFID

Active Service Flow ID being provisioned and re-mapped during hand-over

Type (1 byte)	Length (1 byte)	Value	Scope
?	2	SFID as reported to Target BS through MSS-info backbone message or through Initial Ranging	REG-RSP

##### 11.4.14.2 New\_CID

For MSS during hand-over to a new BS, re-mapping of SFID to new CID

Type (1 byte)	Length (1 byte)	Value	Scope
?	2	CID assigned by Target BS onto which Service Flow is to be mapped	REG-RSP

##### 11.4.14.3 Connection\_Info

A compound TLV value that encapsulates the **Service Flow Parameters** and the **CS Parameters** that have changed for the Service Flow during hand-over. All the rules and settings that apply to the parameters when used in the DSC-RSP message apply to the contents encapsulated in this TLV.

Type (1 byte)	Length (1 byte)	Value (variable length)	Scope
?	<i>n</i>	Compound TLV value encapsulating changed Service Flow Parameters and CS Parameters during hand-over remapping of Service Flow	REG-RSP

*Remedy Action 16:*

*[In C.2.4 MSS-info-response message, Table C5—MSS-info-response Message, page 46, modify as:]*

Remove duplicate row references to TLV SBC-REQ MAC messages

*Remedy Action 17:*

*[In C.2.4 MSS-info-response message, Table C5—MSS-info-response Message, page 46:]*

Add rows with appropriate references to TLV REG-REQ MAC messages

*Remedy Action 18:*

*[In C.2.4 MSS-info-response message, Table C5—MSS-info-response Message, page 46:]*

Add row with appropriate references to MSS Network Address

*Remedy Action 19:*

*[In C.2.4 MSS-info-response message, Table C5—MSS-info-response Message, page 46:]*

Add rows with appropriate references to populate SFID, New\_CID and Connection\_Info TLVs for Target BS REG-RSP to MSS during hand-over.

*Remedy Action 20:*

*[In 1.4.1.2.3 Drops and corrupted HO attempts, page 11, paragraph 2, append to end of paragraph:]*

‘Serving BS can also detect a drop by MSS failure to communicate exceeding MSS Sleep-Aging-Timer.’

*Remedy Action 21:*

*[In 1.4.1.2.4 Re-entry with the target BS, page 12, paragraph 1, replace entire paragraph with:]*

‘Network re-entry is processed using the mechanics for hand-over as detailed in **1.4.1.2.2 HO process** and as shown in Figure 0f’

*Remedy Action 22:*

*[Delete 1.4.1.2.4.1 Synchronize with downlink and obtain parameters thru 1.4.1.2.4.6 Commence Normal Operation completely; text relocated to 1.4.1.2.2 HO process]*

*Remedy Action 23:*

*[In C.2.2 I-am-host-of message, page 45, paragraph 1, replace entire paragraph with:]*

**‘C.2.2 HO complete/Serving BS notification message**

This message is sent by a BS to notify other BS (or the ASA server) that a certain MSS is registered with it. The primary use is to notify previous Serving BS and/or ASA or other network services access control administrator that MSS has successfully completed network entry or hand-over and that the BS originating the HO complete/Serving BS notification message is now the Serving BS for the MSS. The message may be sent upon MSS establishment of normal operation, and periodically on timer interval (MSS Registration-TIMER). The message might trigger a Neighbor BS to request more information on the MSS (either directly from the Serving BS, or from an ASA server). The message contains the following information,

**Table C3—HO complete/Serving BS notification message’**

*Remedy Action 24:*

*[In 10.1 Global Values, Table 275a—Parameters and Constants, pages 39&40, modify as:]*

Append to end of table:

<b>System</b>	<b>Name</b>	<b>Time Reference</b>	<b>Min. Value</b>	<b>Default Value</b>	<b>Max. Value</b>
BS	MSS Registration-TIMER	Nominal time for aging of MSS registration association with Serving BS. Timer expiration may trigger re-registration, re-broadcast of MSS/Serving BS association, or other action.			86400s

*Remedy Action 25:*

*[In C.2.7 HO-notification-confirm message, page 48, entire section, replace with:]*

C.2.7 currently is useless duplication of C.2.6

**‘C.2.7 HO complete/Serving BS notification acknowledge message**

A BS may send a HO complete/Serving BS notification acknowledge message to acknowledge receipt of a HO complete/Serving BS notification message. The message contains the following information:


**Table C8— HO complete/Serving BS notification acknowledge message**


Field	Size	Notes
Global Header	152 bits	
Security Field	TBD	A means to authenticate this message
CRC Field	32-bits	IEEE CRC-32

Note: Need Management Message ID Number for Global Header

*Remedy Action 26:*

*[In C.2.8 Example of Backbone Network HO procedure, pages 48-50, delete Figure C.2—Example of HO call flow by BS entirely and replace Figure C.1—Example of HO call flow by MS with:]*

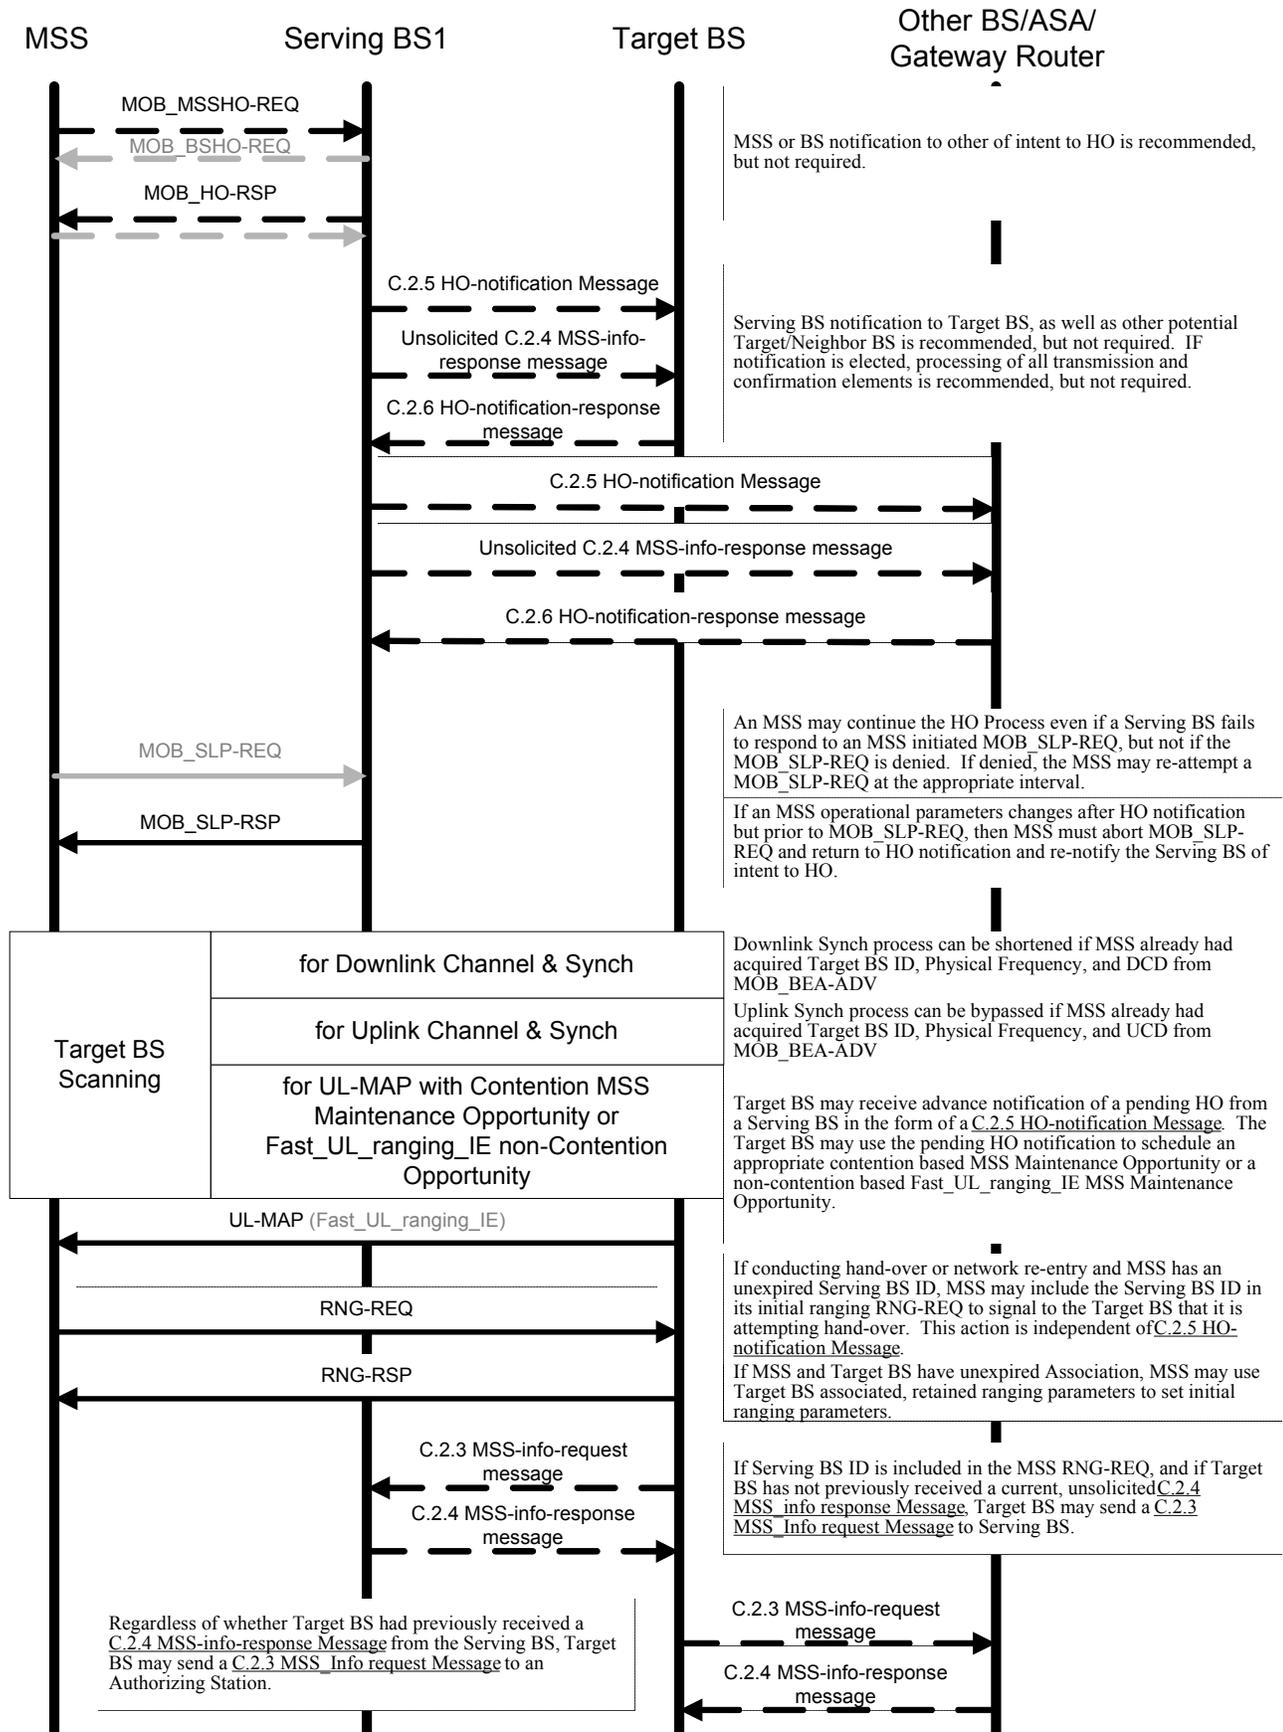

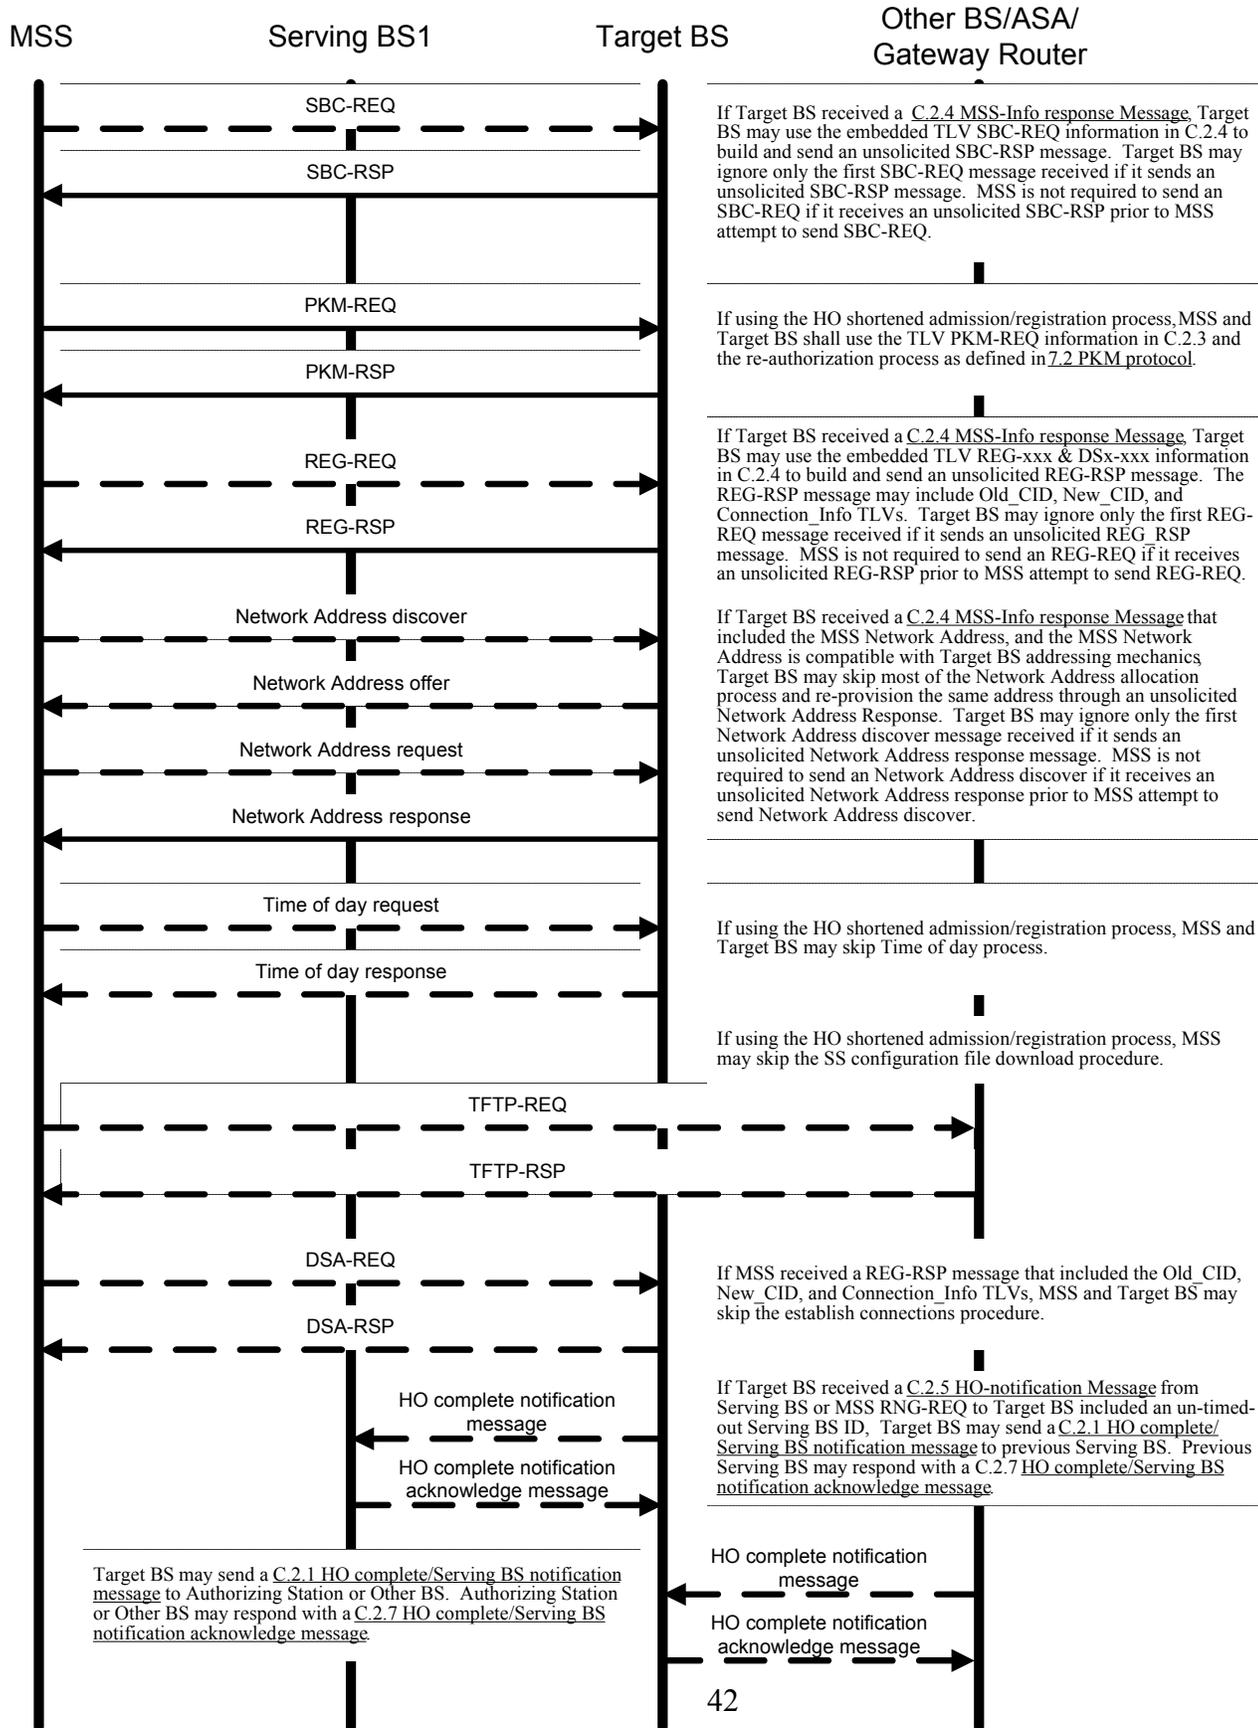

Note: still need to rework all of sections D.1 through D.5 Figures and Diagrams.

5. **Change Document in Revision Outline Format** (for clarity sake, Section 5 supercedes previous change notations).

*[In 1.4.1.1 Network reference model, 1.4.1.1.1 Entities, page 3, paragraph 1, modify paragraph with:]*

#### 1.4.1.1.1 Entities

The network reference model consists of BS units providing contiguous/non-contiguous service coverage across a distributed geographic region where the BS units are covering a certain area, and connected by a backbone network and share network affiliation. The reference network may be public or private, managed or unmanaged, restricted entry or open connection. Multiple ~~Several such~~ networks, of varying design and performance and operated ~~owned~~ by ~~disparate different~~ operators may coexist in the same ~~geography~~ service area. Depending on the relationship of the varying operators, configuration of the networks, operational deployment, etc..., MSS may perform uninterrupted, persistent active service flow hand-over (soft hand-over) or interrupted, non-persistent active service flow hand-over (hard hand-over) between BS on the same or disparate networks. Hand-overs may be intra- or inter-network. Hand-over management may be centrally controlled or employ a distributed decision mechanism, or some combination thereof. ~~Each backbone~~ Backbone networks may employ sophisticated ~~contain~~ centralized AAA (Authorization, Authentication and Accounting), management, provisioning or other specialized servers. Specifically, those servers responsible for authentication and service authorization are collectively referred to as ASA-server(s) and may be single, multiple, centralized or distributed. The operation of these servers with the BS and MSS is specified to the extent of defining the control messages.

*[In 1.4.1.1.4 MSS Service Context, page 6, modify with:]*

#### 1.4.1.1.4 MSS Service Context

In the mobile environment, certain Service Flows are provisioned for each MSS. QoS parameters are provisioned by the operator for each flow and identified by certain Service Class names. Set of Service Classes should be provisioned through upper layers (e.g. network management) at each BS and each MSS.

For each SU certain AuthorizedQoSParamSet shall be provisioned identified by the corresponding Service Class name. In the ~~process of~~ initial Network Entry, ~~as well as in the processes of Association Ranging and Hand-over processes~~, MSS shall requests from the ~~target Target~~ BS certain ~~level of~~ QoS levels per Active Service Flow, differentiated by in the terms of Service Class ~~which and represents represented by~~ AuthorizedQoSParamSet. The BS shall responds with name of Service Class available for the Service Flow. This Service Class will become AdmittedQoSParamSet in the case of successful Network Entry/HO.

Network Service is defined as a service provided to the MSS by the network through a single persistent ; permanent IP address with particular connectivity and air-interface MAC parameters (including QoS properties). A MSS persistent IP address is defined as an MSS network connection address as allocated in 6.4.9.10 for as long as it remains persistent on the network. Connectivity properties, including Home Network address, are defined by specification in the of MSS Configuration file in 6.4.9.12 ~~permanent IP address~~. The

permanent IP address defines the MSS home-network. QoS properties are those of Service Flow associated with the network service, as specified in 6.4.13.

MSS Service Context is defined as a set of network services authorized for a given MSS. It is specified by an MSS Service Context Descriptor composed of the following elements:

**Table 1d—MSS Service Context Descriptor**

Context Element	Meaning
MSS 48-bit MAC address unique identifier	48-bit universal MAC address, as specified in 6.4.1. During HO it is used to refer to specific connectivity (addressing) and properties of MAC connections (including QoS properties)
<del>MSS Home attachment address</del> <del>Address of MSS at Home Network</del>	<del>MSS static configured home attachment point address for traffic forwarding mobile addressing mode</del> <del>IP address of MSS at its Home Network. This address does not change while MSS travels from one BS to another</del>
Number N of Network Service IEs	Number of Network Service Information Elements (NSIEs). Each SIE corresponds to a single data connection
N x NSIE	The structure of SIE is specified below
Number M of Security Association	Number M of Security Associations established for the MSS.
M x SAIE	TBD

*[In 1.4.1.2.1.1 Network topology advertisement, page 8, modify as:]*

#### **1.4.1.2.1.1 Network topology advertisement**

A BS may periodically broadcast information about the network topology using the MOB\_BEA-ADV NBR-ADV-MAC broadcast management message. An MSS may decode this message to find out information about the parameters of available networks and neighbor BS. Each MSS will thus be able to assess interest in joining the network and synchronize quickly with neighbor BS.

MOB\_BEA-ADV Neighbor BS associations may be acquired by static or dynamic configuration. Static sources may include implementation configuration of the BS and/or configuration of the BS through another network management device. Dynamic sources may include Neighbor BS identified and reported to the Serving BS by attached MSS through MOB\_SS\_INF-RSP management messages. In dynamic association operation, BS may identify each other over the backhaul network as Neighbor BS using the C.2.9 Neighbor Notification.request message, C.2.10 Neighbor Notification.response message and C.2.11 Neighbor Notification confirmation message.

Neighbor BS operational and performance TLV data for MOB\_BEA-ADV broadcast may be assembled by the BS using C.2.12 Neighbor Info message and/or C.2.4 MSS-info-response messages.

*[Delete 1.4.1.2.1.2 MSS Scanning of neighbor BS in its entirety:]*

#### **1.4.1.2.1.2 MSS Scanning of neighbor BS**

~~A BS may allocate time intervals to MSS's for the purpose of seeking and monitoring neighbor BS suitability as targets for HO. Such a time interval will be referred to as a scanning interval.~~

~~An MSS may request an allocation of a scanning interval using the MOB\_SCN-REQ MAC message. The MSS indicates in this message the duration of time it requires for the scan, based on its PHY capabilities.~~

~~Upon reception of this message, the BS shall respond with placement of a Scanning\_IE in the DL-MAP. The Scanning\_IE shall either grant the requesting MSS a scanning interval that is at least as long as requested by that MSS, or deny the request. The BS may also place unsolicited Scanning\_IE.~~

~~An MSS, upon detection of a Scanning\_IE addressed to it in the DL-MAP, shall use the allocated interval to seek for neighbor BS. When neighbor BS are identified, the MSS shall attempt to synchronize with their downlink transmissions, and estimate the quality of the PHY connection.~~

*[Replace 1.4.1.2.1.3 Association Procedure, page 8, in its entirety with:]*

#### **1.4.1.2.1.3 Association Procedure**

~~An MSS may use this interval for ranging as well as for the association procedure. When associating with a neighbor BS, the MSS shall not only synchronize with neighbor BS downlink, but shall also perform two additional stages called association initial ranging and association pre-registration. Association initial ranging is performed by transmitting a RNG-REQ MAC message as specified in IEEE Standard P802.16-REVd/D1-2003 section 6.4.2.3.5 with the extensions specified in Ranging Request (RNG-REQ) message and Ranging Response (RNG-RSP) message. Upon reception of a RNG-RSP message with the prediction of service level parameter set to 2, the MSS marks the target BS as Associated. Information on Association is reported to the Serving BS. The target BS may store information on newly associated MSS. Association state of specific MSS at the BS shall be aged-out after ASC-AGING-TIMER timeout.~~

Association is an optional initial ranging parameter negotiation and MSS table notation maintenance procedure occurring during Initial Ranging of a BS. The Association relationship function is to memorialize MSS successful Scanning and Ranging of a BS for the purpose of expediting a potential future hand-over of the MSS to the then Target BS. MSS may store successful Ranging information for Associated BS for the purpose of setting initial Ranging values in a future Ranging event, possibly associated with a hand-over, to the Associated BS.

Upon completion of a successful MSS initial-ranging of a BS as specified in *IEEE P802.16-REVd/D1-2003 "Part 16: Air Interface for Fixed Broadband Wireless Access Systems"* section **6.4.9.5 Initial ranging and automatic adjustments** with the extensions specified in **11.1.3 RNG-REQ message encodings, Table 289a—RNG-REQ message encodings, and 11.1.4 RNG-RSP message encodings, Table 290a—RNG-RSP message encodings**, if the RNG-RSP message contains a Service Level Prediction parameter set to 2, the MSS may mark the BS as Associated in its MSS local Association table of identities, recording elements of the RNG-RSP to the MSS local Association table, and setting an appropriate aging timer (See **Table 275a—Parameters and Constants, ASC-AGING-TIMER**). Association state in the MSS local Association table shall be aged-out after ASC-AGING-TIMER timeout and the Association entry removed.

While Association is current (aging timer has not expired), MSS may use recorded Associated Ranging values to set Initial Ranging values in a new initial Ranging event to the same Associated BS. An MSS may have several Associated BS in its local Association table concurrently and shall use the respective stored Associated Ranging values only with the related Associated BS.

Information on Association may be reported by the MSS to its Serving BS in periodic 6.4.2.3.52 MOS\_SS\_INF-RSP messages to the Serving BS.

*[In 1.4.1.2.2 HO process, page 8, modify with:]*

#### **1.4.1.2.2 HO process**

The section defines the HO process in which an MSS migrates from the air-interface provided by one BS to the air-interface provided by another BS. The HO process consists of the stages ~~listed below (not necessarily in the order listed):~~

- ~~—HO initiation, the decision to start the process is taken~~
- ~~—Termination of service with the serving BS, where all connections belonging to the MSS are terminated, and the context associated with them (i.e. information in queues, ARQ state machine, counters, timers, etc.) is discarded~~
- ~~—Network re-entry in target BS, where the MSS re-enters the network using a fast network entry procedure. After network re-entry, service flows belonging to the MSS are re-associated with newly established connections. QoS parameters of service flows (AdmittedQoSParamSet) may be different from AuthorizedQoSParamSet, based on the availability of resources in the target BS.~~

Cell Selection — MSS may use Neighbor BS information acquired from a decoded MOB\_BEAD-ADV message, or may make uninformed decision, to schedule sleep-intervals to scan, and possibly range, Neighbor BS for the purpose of evaluating MSS interest in hand-over to potential Target BS. MSS may provide results of its scanning and ranging activity to Serving BS through MOB\_SS\_INF-RSP.

HO Decision — a hand-over begins with a decision for an MSS to hand-over its air interface, service flow, and network attachment from a Serving BS to a Target BS. The decision may originate either at the MSS, the Serving BS, or on the network. The HO Decision consummates with a notification of MSS intent to hand-over through MOB\_xxxHO-REQ. The HO notification is recommended, but not required. The HO notification may originate with either the Serving BS or MSS. Acknowledgement with MOB\_xxxHO-RSP of a notification is required.

Backbone HO Notification — Serving BS may notify Target BS(s) over the backbone network of MSS intent to hand-over to Target BS (see section Backbone network HO procedures). Serving BS may also send MSS information over the backbone that can expedite hand-over. If Target BS receives a backbone notification message, subsequent backbone HO notification response and confirmation messages are recommended, but not required.

**Sleep** — the MSS shall use sleep-interval to establish a working ‘unavailable’ service window with Serving BS to conduct network re-entry with Target BS. This mechanism permits continued service with the Serving BS should the hand-over attempt fail or be aborted. The MSS shall send a MOB\_SLP-REQ sleep request message, or Serving BS may send an unsolicited MOB\_SLP-RSP sleep response message. The burden for message origination lies with the party that originated MOB\_XXXHO-REQ hand-over request. If MSS sends MOB\_SLP-REQ, then Serving BS MOB\_SLP-RSP is required. An MSS may continue the HO process even if the Serving BS fails to respond to a MOB\_SLP-REQ, but not if MOB\_SLP-RSP denies the sleep request. If denied, the MSS may re-attempt a MOB\_SLP-REQ at the appropriate interval. If an MSS operational parameter changes after MOB\_XXXHO-REQ but prior to start-frame of an approved sleep-interval, MSS must abort the hand-over attempt, return to HO Decision, and re-notify the Serving BS of intent to hand-over.

**Target BS Scanning** — MSS shall scan Target BS for downlink channel & synchronization and uplink channel & synchronization. If MSS had previously decoded a MOB\_BEA-ADV message including Target BS ID, Physical Frequency, DCD and UCD, then the scanning and synchronization process may be shortened. If the Target BS had previously received HO notification from Serving BS over the backbone (see section Backbone network HO procedures), then Target BS may place a non-contention based Fast\_UL\_ranging\_IE MSS Initial Ranging opportunity in the UL-MAP. MSS shall scan Target BS for UL-MAP that includes either a contention or non-contention based MSS Initial Ranging opportunity.

**Network Re-entry** — MSS and Target BS shall conduct Ranging per 6.2.9.5 to begin network re-entry. If MSS RNG-REQ includes an unexpired Serving BS ID and Target BS had not previously received MSS information over the backbone (see section Backbone network HO procedures), then Target BS may make an MSS information request of Serving BS over the backbone network and Serving BS may respond. Regardless of having received MSS information from Serving BS, Target BS may request MSS information from an Authorizing Station via the backbone network. Network re-entry proceeds per 6.2.9.5 except as may be shortened by Target BS possession of MSS information obtained from Serving BS over the backbone network. Network re-entry process completes with establishment of MSS normal operations.

**Termination of Service** — The final step in hand-over is any termination of MSS services with previous Serving BS. If Target BS had received a HO notification from Serving BS over the backbone (see section Backbone network HO procedures), or MSS RNG-REQ included an unexpired Serving BS ID, then Target BS may send a HO complete/Serving BS notification message over the backbone network to the Serving BS and any Authorizing Station. HO acknowledgement is recommended, but not required. Upon receipt of a HO complete/Serving BS notification message, Serving BS shall terminate all connections belonging to the MSS and the context associated with them (i.e. information in queues, ARQ state-machine, counters, timers, etc..., is discarded). Target BS now becomes the new Serving BS for all purposes.

The HO process, and its similarity to the initial network entry process, is depicted in Figure 0f.

*[In 1.4.1.2.2.1 Cell Selection, pages 9&10, modify with:]*

Cell selection ~~is a terminology used to refer~~s to the process of an MSS Scanning and/or Ranging one or more BS in order to determine suitability, along with other performance considerations, for network connection or hand-oversituations where an MSS leaves a BS before getting to the normal operation state. MSS may incorporate information acquired from a MOB\_BEADV message to give insight into available Neighbor BS for cell selection consideration. If currently connected to a Serving BS, an MSS shall schedule sleep-intervals to conduct Cell Selection for the purpose of evaluating MSS interest in hand-over to potential Target BS. Such procedure does not involve termination of existing connections to a Serving BS and their re-opening in a Target BS, nor does it change the status of any existing connections, or establish new ones. If ranging a Target BS for hand-over, any newly assigned basic and primary CIDs are specific to the Target BS and do not replace or supplant the basic and primary CIDs the MSS employs in its communication with its Serving BS. MSS may provide results of its scanning and ranging activity to Serving BS through MOB\_SS\_INF-RSP. An MSS may perform a cell selection if such an action is necessary with respect to its PHY signal quality. In such a case the MSS shall restart the initial re-entry sequence or the HO sequence as applicable. No action is required from the BS during an cell selection.

*[In 1.4.1.2.2.2 HO initiation, pages 10&11, modify with:]*

Either an MSS or a BS may initiate a HO by transmitting the MOB\_MSSHO-REQ or MOB\_BSHO-REQ MAC messages. Transmission of the MOB\_xxxHO-REQ MAC message is recommended, but not required. It is anticipated that in most situations the MSS will be the initiator of the HO, but sometimes a BS may be the initiator of a HO to facilitate load sharing among BS or because of uplink connection quality.

When MOB\_MSSHO-REQ is sent by an MSS, the MSS may indicate one or more possible target-Target BS (from signal quality point of view). When MOB\_BSHO-REQ is sent by a Serving BS, the Serving BS may indicate the one or more recommended target-Target BS (based on their capability to meet the MSS QoS requirements). Serving BS criteria for recommendation of Target BS may include factors like expected Target BS QoS performance to MSS requirements. The MOB\_MSSHO-REQ message may include an indication of the estimated time for performing the HO. Acknowledgement with MOB\_xxxHO-RSP of a MOB\_xxxHO-REQ notification is required. MSS actual pursuit of hand-over to Target BS in MOB\_xxxHO-RSP is recommended, but not required. MSS may elect to attempt hand-over to a different Target BS, a Target BS that may or may not have been included in MOB\_xxxHO-RSP, with the understanding that the different Target BS may not receive notification of the pending hand-over from the Serving BS over the backbone network prior to MSS initial Ranging of Target BS (see section Backbone network HO procedures). If the MSS signals rejection of Serving BS instruction to HO through HO\_type field in the MOB\_MSSHO-RSP set value of 10 (HO reject option), the BS may reconfigure the Target BS list and retransmit MOB\_BSHO-RSP message including a new Target BS list.

Serving BS may notify one or more Target BS over the backbone network of MSS intent to hand-over to Target BS (see section Backbone network HO procedures). Serving BS may also send MSS information to Target BS over the backbone that can expedite hand-over. If Target BS receives a backbone notification message,

~~subsequent backbone HO notification response and confirmation messages, including expected post-hand-over MSS performance levels, are recommended, but not required. At the BS side, before sending MOB\_BSHO-REQ or after receiving a MOB\_MSSHO-REQ message, the BS shall notify neighboring BS through the backbone of the HO request. The BS shall further acquire from the neighbor BS information regarding their capability of serving the requesting MSS. See sections Ranging Request (RNG\_REQ) message and Ranging Response (RNG\_RSP) message sections contain specifications for the communication through the backbone network, and the information exchanged between BS.~~

~~After receiving MOB\_MSSHO-REQ or MOB\_BSHO-REQ message, the receiving party shall respond with a MOB\_HO-RSP MAC message. When sent by a BS, the MOB\_HO-RSP message may indicate a recommended target BS. The MSS, at the risk that if it chooses an alternative target BS, it might receive a degraded level of service, may ignore this recommendation (this includes staying with its serving BS, i.e. skipping the HO). The MOB\_HO-RSP message may also include an estimation of the time when the HO would take.~~

~~After an MSS or BS has indicated intent to HO using MOB\_XXXHO-REQ, the MSS may cancel the HO at any time prior to transmission of MOB\_SLP-Rxx. The cancellation may be made through transmission of a MOB\_HO-IND with the HO cancel option (HO Type=01) or through the transmission of a new MOB\_XXXHO-REQ message.~~

*[Replace 1.4.1.2.2.3 HO cancellation, page 11, in its entirety with:]*

#### **1.4.1.2.2.3 HO cancellation**

~~After the MSS or BS have initiated an HO using MOB\_HO-REQ, the MSS may cancel the HO at any time prior to transmission of the MOB\_HO-IND. The cancellation shall be made through transmission of a MOB\_HO-IND with the HO cancel option (HO Type=01).~~

#### **1.4.1.2.2.3 Sleep and Hand-over**

~~The MSS shall use sleep-interval to establish a working 'unavailable' service window with Serving BS to conduct scanning, initial ranging and HO/network re-entry with Target BS. This mechanism permits continued service with the Serving BS should the hand-over attempt fail or be aborted. The MSS shall send a MOB\_SLP-REQ sleep request message, or Serving BS may send an unsolicited MOB\_SLP-RSP sleep response message. The burden for message origination lies with the party that originated MOB\_XXXHO-REQ hand-over request. If no MOB\_XXXHO-REQ message was issued, then the requirement falls to the MSS. If MSS sends MOB\_SLP-REQ, then Serving BS MOB\_SLP-RSP is required. An MSS may continue the HO process even if the Serving BS fails to respond to a MOB\_SLP-REQ, but not if MOB\_SLP-RSP denies the sleep request. If denied, the MSS may re-attempt a MOB\_SLP-REQ at the appropriate interval.~~

~~If an MSS operational parameter changes after MOB\_XXXHO-REQ but prior to start-frame of an approved sleep-interval, MSS must abort the hand-over attempt, return to HO Decision, and re-notify the Serving BS of intent to hand-over.~~

MSS may abort the hand-over attempt at any time, for any reason, by aborting the sleep-interval and returning to Normal Operation with its Serving BS.

Serving BS shall treat any uplink PDU from MSS after BS transmittal of an activating MOB\_SLP-RSP as cancellation of any pending MSS HO as if the MSS had transmitted MOB\_HO-IND with the HO cancel option.

*[Replace 1.4.1.2.2.4 Termination with the serving BS, page 11, in its entirety with:]*

#### **1.4.1.2.2.4 Termination with the serving BS**

After the [MSS/BS]MOB\_HO-REQ/MOB\_HO-RSP handshake is completed, the MSS may begin the actual HO. This is done by sending a MOB\_HO-IND-MAC message with the serving BS release option (HO\_type=00).

If the HO\_type field has the value of 00 (serving BS release option), the BS may close all connections and discard MAC state machines and MAC PDUs associated with the MSS.

#### **1.4.1.2.2.4 Scanning of Target BS**

During the sleep-interval attributed to hand-over, MSS shall scan Target BS for downlink channel & synchronization and uplink channel & synchronization. If MSS had previously decoded a MOB\_BEA-ADV message including Target BS ID, Physical Frequency, DCD and UCD, then the scanning and synchronization process may be shortened. If the Target BS had previously received HO notification from Serving BS over the backbone (see section Backbone network HO procedures), then Target BS may place a non-contention based MSS Initial Ranging opportunity using the PHY dependent Fast\_UL\_ranging\_IE() (see 8.3.1.5.5.3.3 Fast ranging (Paging) Information Element, 8.4.6.3.4 Fast ranging (Paging) Information Element, and 8.5.5.3.5 & 8.5.5.3.6 Fast ranging (Paging) Information Element) in the UL-MAP. MSS shall scan Target BS for UL-MAP that includes either a contention or non-contention based MSS Initial Ranging opportunity.

*[Replace 1.4.1.2.2.5 HO rejection, page 11, in its entirety with:]*

#### **1.4.1.2.2.5 HO rejection**

If the HO\_type field has the value of 01 (HO reject option), the BS may reconfigure target BS list and retransmit MOB\_HO-RSP message including new target BS list.

#### **1.4.1.2.2.5 Network Entry/Re-entry**

Unless otherwise excepted in this section, MSS mobile network entry/re-entry is processed according to **6.4.9 Network entry and initialization**. For purposes of this process, MSS network re-entry and hand-over are synonymous.

During its sleep-interval or at MSS initial entry, MSS and Target BS shall conduct Ranging per **6.4.9.5 Initial ranging and automatic adjustments** to begin network entry/re-entry except as MSS may take advantage of a non-contention based MSS Initial Ranging opportunity if present. If MSS RNG-REQ includes an unexpired Serving BS ID and Target BS had not previously received MSS information over the backbone (see section Backbone network HO procedures), then Target BS may make an MSS information request of Serving BS over the backbone network and Serving BS may respond. Regardless of having received MSS information from Serving BS, Target BS may request MSS information from an Authorizing Station via the backbone network.

Network re-entry proceeds per **6.4.9.5 Initial ranging and automatic adjustments** except as may be shortened by Target BS possession of MSS information obtained from Serving BS over the backbone network.

If Target BS had previously received an MSS-Info response message (see section Backbone network HO procedures) containing MSS information, Target BS may use the embedded TLV SBC-REQ information to build and send an unsolicited SBC-RSP message to MSS. Target BS may ignore only the first SBC-REQ message received if it sends an unsolicited SBC-RSP message. MSS is not required to send an SBC-REQ if it receives an unsolicited SBC-RSP prior to MSS attempt to send SBC-REQ.

If MSS RNG-REQ included an unexpired Serving BS ID and Target BS had previously received an MSS-Info response message (see section Backbone network HO procedures) containing MSS information, MSS and Target BS shall use the embedded TLV PKM-REQ information and the re-authorization process as defined in **7.2 PKM protocol**.

If Target BS had previously received an MSS-Info response message (see section Backbone network HO procedures), Target BS may use the embedded TLV REG-REQ & DSA-REQ information to build and send an unsolicited REG-RSP message. The REG-RSP message may include the SFID, New\_CID, and Connection\_Info TLVs. Target BS may ignore only the first REG-REQ message received if it sends an unsolicited REG\_RSP message. MSS is not required to send an REG-REQ if it receives an unsolicited REG-RSP prior to MSS attempt to send REG-REQ.

If Target BS had previously received an MSS-Info response message (see section Backbone network HO procedures) that included the MSS Network Address in the embedded TLV, and provided that MSS Network Address is compatible with Target BS network addressing scheme, Target BS may skip most of the Network Address allocation process and re-provision the same address through an unsolicited Network Address Response. Target BS may ignore only the first Network Address discover message received if it sends an unsolicited Network Address response message. MSS is not required to send an Network Address discover if it receives an unsolicited Network Address response prior to MSS attempt to send Network Address discover.

If MSS RNG-REQ included an unexpired Serving BS ID, MSS and Target BS may skip Time of day process.

If MSS RNG-REQ included an unexpired Serving BS ID, MSS may skip the MSS configuration file download procedure.

If MSS received a REG-RSP message that included the SFID, New\_CID, and Connection\_Info TLVs, MSS and Target BS may skip the establish connections procedure.

Network entry/re-entry process completes with establishment of MSS normal operations.

*[Add new section 1.4.1.2.2.6 Termination of Service:]*

#### **1.4.1.2.2.6 Termination of Service**

The final step in hand-over/network re-entry is any termination of MSS services with previous Serving BS. If Target BS had received a HO notification from Serving BS over the backbone (see section Backbone network HO procedures), or MSS RNG-REQ included an unexpired Serving BS ID, then Target BS may send a HO

complete/Serving BS notification message over the backbone network to the Serving BS and any Authorizing Station. HO acknowledgement is recommended, but not required. Upon receipt of a HO complete/Serving BS notification message, Serving BS shall terminate all connections belonging to the MSS and the context associated with them (i.e. information in queues, PDUs, ARQ state-machine, counters, timers, etc...). Regardless of transmittal of a HO complete/Serving BS notification message or its acknowledgment, Target BS now becomes the new Serving BS for all purposes.

*[In 1.4.1.2.3 Drops and corrupted HO attempts, page 11, paragraph 2, modify as:]*

An MSS can detect a drop by its failure to demodulate the downlink, or by exceeding the RNG-REQ retries limit allowed for the periodic ranging mechanism. A BS can detect a drop by exceeding the RNG-REQ retries limit allowed for the periodic ranging mechanism. Serving BS can also detect a drop by MSS failure to communicate exceeding MSS Sleep-Aging-Timer.

*[In 1.4.1.2.4 Re-entry with the target BS, page 12, paragraph 1, replace entire paragraph with:]*

Network re-entry is processed using the mechanics for hand-over as detailed in 1.4.1.2.2 HO process and~~When re-entry with the target BS takes place, the target BS as well as all neighbor BS are aware of the HO in progress (except in a drop situation). At re-entry, the MSS performs the steps~~ as shown in Figure Of.

*[Delete 1.4.1.2.4.1 Synchronize with downlink and obtain parameters thru 1.4.1.2.4.6 Commence Normal Operation completely; text modified and relocated to 1.4.1.2.2 HO process]*

#### ~~1.4.1.2.4.1 Synchronize with downlink and obtain parameters~~

~~For MSS that have used their scanning interval to synchronize with target BS and have decoded the MOB\_NBR-ADV message, this stage should be immediate. In other situations this procedure defaults to the one specified for initial network entry.~~

#### ~~1.4.1.2.4.2 Obtain uplink parameters~~

~~For MSS's that have decoded the MOB\_NBR-ADV message, this stage should be immediate. In other situations this procedure defaults to the one specified for initial network entry.~~

#### ~~1.4.1.2.4.3 Ranging and uplink parameters adjustment~~

~~An MSS may perform an initial network entry as specified in 6.4.9. During this stage the MSS is assigned a new basic and primary management CID in the target BS. If the MSS has used scanning interval(s) to do preliminary ranging with target BS, and if the target BS received HO notification message that contains the MAC address of the MSS, (see Section Annex C, Backbone network HO procedures) the BS may choose, instead of waiting for initial ranging request in MAINT region, to allocate non-contention transmission opportunity for the MSS.~~

~~As opposed to regular network entry, where initial ranging is performed on contention basis, here the ranging opportunity may be allocated individually based on an MSS's 48-bit MAC address assuming this identifier was forwarded to the target BS via the backbone network. Allocation of non-contention ranging opportunity is done using the Fast\_UL\_ranging\_IE() (see Fast ranging (Paging) Information Element) in the UL-MAP.~~

#### ~~1.4.1.2.4.4 MSS re-authorization~~

During this stage the MSS performs the re-authorization part of the PKM protocol used at initial network entry (see IEEE Standard P802.16-REVd/D1-2003, section 7.2). The BS authenticates the user and as the security context has not changed (it is transferred from the old BS via backbone, see Section Annex C, Backbone network HO procedures) the security sub-layer can continue in normal operation.

#### **1.4.1.2.4.5 Re-register and re-establish provisioned connections**

This stage is equivalent to several stages performed during initial network entry. In this stage the MSS reregisters with the BS, and receives on the registration response a conversion table that maps the connections it had with its previous serving BS to a new set of connections on the current serving BS. In doing so, the MSS skips the ~~establish IP connectivity~~ stage, where it is assigned an IP address for management purposes. This stage is not really skipped during HO, instead it is postponed until the normal operation stage is reached. The ~~transfer-operational-parameters~~ and the ~~time-of-day establishment~~ stage are skipped as none of the information contained in the configuration file, nor the time of day is expected to change. The MSS attempts the re-registration by sending the normal REG-REQ MAC message. At this stage the MSS has already provided its 48-bit MAC address identifier, and the BS can recognize that the MSS is performing a HO. The BS REG-RSP shall therefore include TLV values for re-establishing the active provisioned connections (see Section 11.1.1.1, UCD channel encodings).

#### **1.4.1.2.4.6 Commence Normal Operation**

At this stage, normal operation commences. The MSS shall re-establish its IP connectivity as specified at initial network entry. Figure <TBD> shows how a complete HO process might look like in the time domain.

[In IEEE P802.16-REVd/D1-2003 “Part 16: Air Interface for Fixed Broadband Wireless Access Systems”, 6.4.2.3.2 Downlink Map (DL-MAP) message, page 63, change paragraph 5 with:]

#### **Base Station ID**

The Base Station ID is a 48 bit long field uniquely identifying the BS. The Base Station ID shall be programmable. ~~The most significant 24 bits shall be used as the operator ID. This is a network management hook that can be combined with the Downlink Channel ID of the DCD message for handling edge-of-sector and edge-of-cell situations.~~

[In 6.4.2.3.5 Ranging Request (RNG-REQ) message, page 17, lines 9-12, delete from this location and modify and append to end of IEEE P802.16-REVd/D1-2003 “Part 16: Air Interface for Fixed Broadband Wireless Access Systems” section 6.4.2.3.5 Initial ranging and automatic adjustments, page 173, as:]

The following parameters shall be included in the RNG-REQ message:

#### **Serving BS ID**

for MSS during hand-over or network re-entry, the BS ID of the BS to which the MSS is currently connected (has completed complete registration cycle and is in Normal Operation). Serving BS ID shall not be included if interval timer is timed-out (Serving BS ID AGING-TIMER, see Table 275a—Parameters and Constants). Inclusion of Serving BS ID in the RNG-REQ message signals to the Target BS that the MSS is currently connected to the network through Serving BS and is in the process of either a hand-over or network re-entry.

**SFID**

for MSS during hand-over, network re-entry, or Association evaluation, one or more SFID of active Service Flow for which the MSS seeks determination of continued QoS support

**Service Flow encodings**

for MSS during hand-over, network re-entry, or Association evaluation, one or more Service Flow encodings as specified in 11.4.9 that define service performance criteria for each Service Flow, presented immediately succeeding the applicable Service Flow, such that Target BS may evaluate its ability to successfully provision the requested Service Flow, including:

Service Class Name

Traffic priority

Maximum sustained traffic rate

Minimum traffic burst

Minimum reserved traffic rate

Service Flow scheduling type

Tolerated jitter

Maximum latency

Fixed-length versus variable-length SDU indicator

SDU size

*[In 6.4.2.3.6 Ranging Response (RNG-RSP) message, page 17, lines 19&20, change:]*

When a BS sends a RNG-RSP message in response to a RNG-REQ message containing ~~an MSS Association Channel ID TLV~~one or more SFIDs and Service Flow encodings, the BS may include the following TLV parameter in the RNG-RSP message,

*[In 6.4.2.3.6 Ranging Response (RNG-RSP) message, page 17, lines 43-58, modify, relocate and insert as new paragraph prior to line 19, IEEE P802.16-REVd/D1-2003 "Part 16: Air Interface for Fixed Broadband Wireless Access Systems", 6.4.2.3.8 Registration Response (REG-RSP) message:]*

For mobile networks, Target BS shall include SFID, New\_CID, and Connection\_Info TLVs in the REG-RSP for MSS recognized by the Target BS as performing HO or network re-entry by the presence of an unexpired Serving BS ID in the RNG-REQ.

The following TLVs shall be included in the REG-RSP for MSS's recognized by the BS through their 48-bit MAC address (provided in the RNG-REQ message) as MSS's that are performing HO,

CID\_update—The CID\_update is a SFID, New\_CID, and Connection\_Info TLVs value that provides a shorthand method for renewing a active connections used by the MSS in the-its previous serving-Serving BS. The TLVs specify a CID in the new-serving Target BS that shall replace a active CID used in the previous serving-Serving BS. Multiple iterations of these TLVs may occur in the REG-RSP suitable to re-creating and re-assigning all active Service Flows for the MSS from its previous Serving BS including Basic, Primary and

Secondary CIDs. If any of the ~~service-Service flow-Flow~~ parameters change, then those ~~service-Service flow-Flow~~ parameters and CS parameter encoding TLVs that have changed will be added. Only active Service Flows are transferred in this manner.

~~This-These~~ TLVs enables the ~~new-servingTarget~~ BS to renew ~~a-connections~~ used in the previous ~~serving~~ ~~Serving~~ BS, but with different QoS settings.

~~If no traffic is pending for any MSS, the MOB\_TRF-IND message shall be sent with Num-Positive field with zero value.~~

[In 6.4.2.3.41 Sleep Request message (MOB\_SLP-REQ), modify with:]

#### 6.4.2.3.41 Sleep Request message (MOB\_SLP-REQ)

SS supporting sleep-mode uses the MOB\_SLP-REQ message to request permission from the Serving BS to enter sleep-mode. The MOB\_SLP-REQ message is sent from the MSS-SS to the BS on the MSS-SS's basic CID.

Table 84a—Sleep-Request (MOB\_SLP-REQ) message format

Syntax	Size	Notes
MOB_SLP-REQ_Message_Format() {		
Management Message Type=45	8 bits	
<u>reserved</u>	<u>2 bits</u>	
<del>initial-sleep-sleep-window</del>	6 bits	
<u>sleep-window-factor</u>	<u>4 bits</u>	
<del>final-sleep-sleep-window</del>	10 bits	
<u>sleep-window-iterations</u>	<u>10 bits</u>	
}		

Parameters shall be as follows:

#### **initial-~~sleep-sleep~~-window**

Requested start value for sleep-window for the sleep-sleep-interval (measured in frames).

#### **sleep-window-factor**

Multiplying factor for increasing the sleep-window value through multiple sleep-window iterations.

#### **final-~~sleep-sleep~~-window**

Requested maximum sleep-window final-value for the sleep-sleep-interval (measured in frames).

#### **sleep-window-iterations**

Number of iterations of sleep-window to perform prior to completing sleep-interval.

[In 6.4.2.3.42 Sleep Response message (MOB\_SLP-RSP), modify with:]

#### 6.4.2.3.42 Sleep Response message (MOB\_SLP-RSP)

The MOB\_SLP-RSP message shall be sent from a Serving BS to an MSS on the MSS-SS's basic CID in response to an MOB\_SLP-REQ message, or may be sent unsolicited. The MSS-SS shall enter sleep-mode using the parameters indicated in the message. In the case where sleep is denied, it is recommended that the Serving BS provide unsolicited MOB\_SLP-RSP before the expiration of the time interval specified by the REQ-duration field.

**Table 84b—Sleep-Response (MOB\_SLP-RSP) message format**

Syntax	Size	Notes
MOB_SLP-RSP Message Format() {		
Management Message Type=46	8 bits	
Sleep approved	1 bit	0: Sleep-mode request denied 1: Sleep-mode request approved
If (Sleep-approved == 0) {		
After-REQ-action	3 bits	000: The MSS may retransmit the MOB_SLP-REQ message at any time 001: The MSS <del>shall</del> <u>may</u> retransmit the MOB_SLP-REQ message after the time duration (REQ-duration) given by the BS in this message 010: The MSS shall not retransmit the MOB_SLP-REQ message and <u>shall</u> <u>await</u> <del>the an unsolicited</del> MOB_SLP-RSP message from the BS 011:111: Reserved
REQ-duration	4 bits	Time duration for case where After-REQ-action value is 001.
} else {		
<u>Reserved</u>	<u>3 bits</u>	
<del>Start-Start</del> -frame	<u>7 bits</u>	<u>lower byte of the frame number in which the MSS shall enter into sleep-mode</u>
initial- <del>sleep-sleep</del> -window	6 bits	
<u>sleep-window factor</u>	<u>4 bits</u>	
final- <del>sleep-sleep</del> -window	10 bits	
<u>sleep-window-iterations</u>	<u>10 bits</u>	
}		
}		

Parameters shall be as follows:

#### Sleep approved

Response ~~The activation~~-indication whether or not MSS request to enter sleep-mode has been approved by of the MSS when the MSS receives this message from the BS.

0: Sleep-mode request denied

1: Sleep-mode request approved

**After-REQ-action**

On MSS request to enter sleep-mode rejected by the BS, indicates recourse action.

000: The MSS may retransmit the MOB\_SLP-REQ message at any time

001: The MSS shall retransmit the MOB\_SLP-REQ message after the time duration (REQ-duration) given by the BS in this message

010: The MSS shall not retransmit the MOB\_SLP-REQ message and wait the MOB\_SLP-RSP message from the BS

011:111: Reserved

**REQ-duration**

Waiting value for the MOB\_SLP-REQ message re-transmission (measured in ~~MAC~~ frames)

**Start-frame**

Lower byte of the frame number in which the ~~MSS-SS~~ shall enter into sleep mode.

**~~initial-sleep-sleep~~-window**

Start value for ~~sleep-window for~~ the ~~sleep-sleep~~-interval (measured in frames).

**~~sleep-window-factor~~**

Multiplying factor for increasing the sleep-window value through multiple sleep-window-iterations

**~~final-sleep-sleep~~-window**

Maximum sleep-windowFinal value for the ~~sleep-sleep~~-interval (measured in frames).

**~~sleep-window-iterations~~**

Number of iterations of sleep-window to perform prior to completing sleep-interval.

*[In 6.4.2.3.44 Neighbor Advertisement (MOB\_NBR-ADV), page 20&21, modify as:]*

**6.4.2.3.44 Beacon Network Broadcast Advisory (MOB\_BEA-ADV) management Neighbor Advertisement (MOB\_NBR-ADV) message**

An MOB\_BEA-ADV management message may be broadcast by a BS at a If BS broadcasts NBR-ADV messages, they shall be broadcast within the periodic interval (BEA-ADV NBR-ADV interval, see Table 448a2275a) to identify the network and define the characteristics of neighbor BS to potential MSS seeking initial network entry or hand-over, and to identify the network to foreign networks. The BS may restrict MOB\_BEA-ADV to data covering only BS sharing the same Operator ID. BS may restrict MOB\_BEA-ADV to data changed during BEA-ADV interval. BS may include all, select, or no TLV data in MOB\_BEA-ADV. BS may vary TLV data elements included in MOB\_BEA-ADV message from message to message.

Table 84d—MOB ~~BEA~~~~NBR~~-ADV Message Format

Syntax	Size	Notes
MOB <del>NBR</del> <del>BEA</del> -ADV Message Format() {		
Management Message Type = 48	8 bits	
<u>BS ID</u>	<u>48 bits</u>	<u>Base station unique identifier (Same number as that broadcasted on the DL-MAP message)</u>

<u>Operator ID</u>	<u>48 bits</u>	<u>Unique Network ID</u>
Configuration Change Count	8 bits	
<del>—N_NEIGHBORS</del>	<del>8 bits</del>	
<del>—For (j=0; j&lt;N_NEIGHBORS; j++) {</del>		
<del>—Neighbor BS ID</del>	<del>48 bits</del>	
<del>—Physical Frequency</del>	<del>32 bits</del>	
<del>—TLV Encoded Neighbor information</del>	<del>Variable</del>	<del>TLV specific, See Table 292a</del>
<del>—}</del>		
}		

A BS shall generate MOB\_NBRBEA-ADV messages in the format shown in Table 84d. The following parameters shall be included in the MOB\_NBRBEA-ADV message unless otherwise noted as an optional item in which case they may be included,

BS ID — same as the Base Station ID parameter in the DL-MAP message

Operator ID — the unique network ID shared by an association of BS

Configuration Change Count – Incremented by one (modulo 256) whenever any of the values relating to any neighbor BS included data element changes. If the value of this count in a subsequent MOB\_NBRBEA-ADV message remains the same, the MSS can quickly ~~to~~ disregard the entire message.

All other parameters are coded as TLV values (see Table 292a~~FBD~~). All TLV items are optional.

Network Type — defines networks based on service management type and prosecution of non-affiliated MSS connection. The following encodings apply:

0=not specified

1=managed, restricted; ASA function is network managed, MSS access to the network is restricted to affiliated MSS

2=managed, provisional; ASA function is network managed, MSS access to the network is restricted to affiliated MSS, however, limited access may be provided to non-affiliated MSS

3=managed, unrestricted; ASA function is network managed, MSS access to the network is unrestricted

4=unmanaged, restricted; ASA function is either static or unmanaged, MSS access to the network is restricted to affiliated MSS

5=unmanaged, provisional; ASA function is either static or unmanaged, MSS access to the network is restricted to affiliated MSS, however, limited access may be provided to non-affiliated MSS

6=unmanaged, unrestricted; ASA function is either static or unmanaged, MSS access to the network is unrestricted

other=reserved

Time Stamp — number of milliseconds since midnight GMT

BS Next Beacon — estimated time interval in milliseconds until next BS beacon event

**BS Next Contention Network Entry** — estimated time interval in frames until next BS contention based MSS network entry interval

**BS Network Managed Handover Supported** — binary value indicating support for network managed MSS hand-over at BS. 0=no; 1=yes

**BS Air Interface Advertised Bandwidth** —a coarse, implementation specific calculated value

**BS Air Interface Available Bandwidth** — a coarse, implementation specific calculated value

**BS Backhaul Advertised Bandwidth** — a coarse, implementation specific calculated value

**BS Backhaul Available Bandwidth** — a coarse, implementation specific calculated value

**N\_QoS\_Records** — Number of AvailableQoSParamSet Records

**Service Class Code** — Code of Service Class in AvailableQoSParamSet

**N\_Neighbors** – Number of advertised neighbor BS

For each advertised ~~neighbor~~Neighbor BS, the following TLV parameters may be included,

**Neighbor BS-ID** – Same as the Base Station ID parameter in the DL-MAP message of Neighbor BS

**Neighbor Operator ID** — the unique network ID shared by an association of BS; may be omitted if same as for transmitting BS

**Neighbor Network Type** — defines networks based on service management type and prosecution of non-affiliated MSS connection. The following encodings apply:

0=not specified

1=managed, restricted; ASA function is network managed, MSS access to the network is restricted to affiliated MSS

2=managed, provisional; ASA function is network managed, MSS access to the network is restricted to affiliated MSS, however, limited access may be provided to non-affiliated MSS

3=managed, unrestricted; ASA function is network managed, MSS access to the network is unrestricted

4=unmanaged, restricted; ASA function is either static or unmanaged, MSS access to the network is restricted to affiliated MSS

5=unmanaged, provisional; ASA function is either static or unmanaged, MSS access to the network is restricted to affiliated MSS, however, limited access may be provided to non-affiliated MSS

6=unmanaged, unrestricted; ASA function is either static or unmanaged, MSS access to the network is unrestricted

other=reserved

**Neighbor Physical Frequency** – DL center frequency (kHz).

**Neighbor Time Stamp** — number of milliseconds since midnight GMT when neighbor info created for transfer to Serving BS

**Neighbor BS Next Beacon** — estimated time interval in milliseconds from Time Stamp until next BS beacon event

**Neighbor BS Next Contention Network Entry** — estimated time interval in frames until next BS contention based MSS network entry interval

**Neighbor BS Network Managed Handover Supported** — binary value indicating support for network managed MSS hand-over at Neighbor BS

**Neighbor DCD\_settings** – The DCD\_settings is a compound TLV value that encapsulates a DCD message that may be transmitted in the advertised BS downlink channel. This information is intended to enable fast synchronization of the MSS with the advertised BS downlink. The DCD settings fields shall contain only neighbor's DCD TLV values which are different from the serving BS corresponding values. For values that are not included, the MSS shall assume they are identical to the serving BSs corresponding values.

**Neighbor UCD\_settings** – The UCD\_settings is a compound TLV value that encapsulates a UCD message that may be transmitted in the advertised BS downlink channel. This information is intended to enable fast synchronization of the MSS with the advertised BS uplink. The UCD settings fields shall contain only neighbor's UCD TLV values which are different from the serving BS's corresponding values. For values that are not included, the MSS shall assume they are identical to the serving BS's corresponding values.

**Neighbor BS Air Interface Advertised Bandwidth** — a coarse, implementation specific calculated value

**Neighbor BS Air Interface Available Bandwidth** — a coarse, implementation specific calculated value

**Neighbor BS Backhaul Advertised Bandwidth** — a coarse, implementation specific calculated value

**Neighbor BS Backhaul Available Bandwidth** — a coarse, implementation specific calculated value

**Neighbor N\_QoS\_Records** — Number of AvailableQoSParamSet Records

**Neighbor Service Class Code** — Code of Service Class in AvailableQoSParamSet

*[Delete 6.4.2.3.45 Scanning Interval Allocation Request (MOB\_SCN-REQ) message in its entirety:]*

**~~6.4.2.3.45 Scanning Interval Allocation Request (MOB\_SCN-REQ) message~~**

~~A MOB\_SCN-REQ message may be transmitted by an MSS to request a scanning interval for the purpose of seeking neighbor BS, and determining their suitability as targets for HO.~~

~~An MSS shall generate MOB\_SCN-REQ messages in the format shown in Table 84e:~~

**~~Table 84e—MOB\_SCN-REQ Message Format~~**

Syntax	Size	Notes
<del>MOB_SCN-REQ-Message-Format() {</del>		
<del>—Management Message Type = ?</del>	8 bits	
<del>—Scan Duration</del>	16 bits	Units are frames
<del>}</del>		

An MSS shall generate MOB\_SCN-REQ messages in the format shown in Table 84e. The following parameters shall be included in the MOB\_SCN-REQ message,

#### **Scan Duration**

Duration (in units of frames) of the requested scanning period.

*[Delete 6.4.2.3.46 Scanning Interval Allocation Response (MOB\_SCN-RSP) message in its entirety:]*

#### **6.4.2.3.46 Scanning Interval Allocation Response (MOB\_SCN-RSP) message**

A MOB\_SCN-RSP message shall be transmitted by the BS in response to an MOB\_SCN-REQ message sent by an MSS. In addition, BS may send an unsolicited MOB\_SCN-RSP. The message shall be transmitted on the basic CID.

The format of the MOB\_SCN-RSP message is depicted in Table 84f.

**Table 84f—MOB\_SCN-RSP Message Format**

Syntax	Size	Notes
<del>MOB_SCN-REQ-Message-Format() {</del>		
<del>—Management Message Type = ?</del>	8 bits	
<del>—Length</del>	8 bits	In bytes
<del>—For (i=0 ; i&lt;Length/3; i++) {</del>		
<del>—CID</del>	16 bits	basic CID of the MSS
<del>—Duration</del>	8 bits	in frames
<del>}</del>		
<del>}</del>		

#### **Length**

Length in bytes.

#### **CID**

Basic CID of the MSS that have sent MOB\_SCN-REQ message.

#### **Duration**

Duration (in units of frames) where the MSS may scan for neighbor BS.

[Add 6.4.2.3.51 MOB\_SS\_INF-REQ management message:]

#### **6.4.2.3.51 MOB SS INF-REQ message**

A BS may transmit an MOB\_SS\_INF-REQ message to an MSS at any time to obtain MSS operating information and neighbor and foreign network BS measurements. The message shall be transmitted on the MSS basic CID.

**Table 84l—MOB SS INF-REQ message format**

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>MOB_SS_INF-REQ Message Format() {</u>		
<u>Management Message Type = 55</u>	<u>8 bits</u>	
<u>}</u>		

A BS shall generate MOB\_SS\_INF-REQ messages in the format shown in Table 84l.

[Add 6.4.2.3.52 MOB\_SS\_INF-RSP management message:]

#### **6.4.2.3.52 MOB SS INF-RSP message**

A MSS shall transmit an MOB\_SS\_INF-RSP message to a BS in response to an MOB\_SS\_INF-REQ or may send an unsolicited MOB\_SS\_INF-RSP to a BS. The message shall be transmitted on the basic CID.

**Table 84m—SS INF-RSP message format**

<u>Syntax</u>	<u>Size</u>	<u>Notes</u>
<u>MOB_SS_INF-REQ Message Format() {</u>		
<u>Management Message Type = 56</u>	<u>8 bits</u>	
<u>Mobility Support Type</u>	<u>4 bits</u>	<u>What, if any, type of mobility functionality the MSS supports. 0=none; 1=portable; 2=mobile, MSS managed hand over; 3=mobile, network managed hand over; other=reserved</u>
<u>Power Type</u>	<u>4 bits</u>	<u>Disclosure of what current power source the MSS employs. 0=line power; 1=battery power; other=reserved</u>
<u>Power Status</u>	<u>4 bits</u>	<u>Disclosure of current MSS power supply status. Value provided as whole number representing the tens grouping of percentage of power remaining, in</u>

		<u>10% increments, rounded up</u>
<u>TLV Encoded information</u>	<u>Variabl</u> <u>e</u>	<u>TLV specific, See Table 321a</u>
<u>}</u>		

A BS shall generate MOB\_SS\_INF-RSP messages in the format shown in Table 84m. The following parameters shall be included in the MOB\_SS\_INF-REQ message unless otherwise noted as an optional item in which case they may be included.

**Mobility Support Type** — Disclosure of what, if any, type of mobility functionality the MSS supports. The following encodings apply:

- 0=none
- 1=portable
- 2=mobile, MSS managed hand over
- 3=mobile, network managed hand over
- other=reserved

**Power Type** — Disclosure of what power source the MSS employs. The following encodings apply:

- 0=line power
- 1=battery power
- other=reserved

**Power Status** — Disclosure of current MSS power supply status. Value provided as whole number representing the tens grouping of percentage of power remaining, in 10% increments, rounded up (i.e. 18% power remaining would report a value of 2; 31% power remaining would report a value of 4; 97% power remaining would report a value of 0).

All other parameters are coded as TLV values (see Table 321a). All TLV items are optional.

**Home Network ID** — Operator ID of default network to which MSS is associated; only include if different than Serving BS Operator ID

**Authentication Server Address** — Address of ASA network device that holds the MSS provisioned service profile and account status for the MSS

**N\_Neighbors** – Number of discovered neighbor BS

For each neighbor BS, the following parameters may be included.

**Neighbor BS-ID** – Same as the Base Station ID parameter in the DL-MAP message of neighbor BS

**Neighbor BS Operator ID** — the unique network ID shared by an association of BS; only include if different than Serving BS Operator ID

**Neighbor BS Physical Frequency** – DL center frequency (kHz).

**Neighbor BS S/(N + I)** – This parameter indicates the signal to noise and interference ratio measured by the MSS from the particular BS. The value shall be interpreted as an unsigned byte with units of 0.25dB.

**Neighbor BS Service level prediction** – This value indicates the level of service the MSS can expect from this BS. The following encodings apply:

0 = No service possible for this MSS; service level undetermined.

1 = Some service is available for the MSS.

2 = Service with QoS specified at ASA server (for the MSS identified by the 48-bit MAC address) is available.

*[In IEEE P802.16-REVd/D1-2003 “Part 16: Air Interface for Fixed Broadband Wireless Access Systems” section 6.4.9.5 Initial ranging and automatic adjustments, page 173, insert the following between lines 27 & 29:]*

For MSS that are employing the optional Association procedure, and to which the MSS and BS are currently Associated, the MSS may use its un-expired, previously obtained and retained associated Ranging values to set initial ranging values including  $P_{TX\_IR\_MAX}$  power levels.

*[In 6.4.16 Sleep-mode for mobility-supporting MSS, 6.4.16.1 Introduction, pages 26&27, modify with:]*

**6.4.16.1 Introduction**

Sleep-mode is a mode in which MSSSS's supporting mobility may power down, scan neighbor and foreign network BS, range neighbor and foreign network BS, conduct hand-over/network re-entry, or perform other activities for which the MSS will be unavailable to the Serving BS for DL or UL traffic. Sleep-mode is intended to enable mobility-supporting MSSSS's to minimize their energy-power usage and facilitate hand-over decision and operation while staying connected to the network; but sleep-mode use should not be narrowly interpreted. Implementation of sleep-mode is optional.

~~An SS that supports sleep-mode can be in one of two modes:~~

- ~~—Awake~~
- ~~—Sleep~~

~~An MSS in sleep-mode shall engage in a sleep-interval, defined as A—a time duration, measured in whole frames, where the MSS-SS is in sleep-mode. The sleep-interval is constructed of one or more variable-length, consecutive sleep-windows, with interleaved listening-windows, through one or more sleep-window-iterations. When an SS is in awake-mode, it is receiving and transmitting PDUs in a normal fashion. In sleep-mode During a sleep-window, an MSS When the SS is in a sleep-mode, it does not send or receive PDUs—, has no obligation to listen to DL traffic and the SS may power-power-down one or more physical operation components. During a listening-interval, an MSS shall synchronize with the Serving BS downlink and listen for an appropriate MOB\_TRF-IND traffic indication message. Length, measured in whole frames, of the listening interval. During this interval the The MSS SS shall decide whether to stay awake or go back to sleep based on an positive MOB\_TRF-IND indication from the Serving BS. The Listeninglistening-interval-window parameter duration is negotiated between the BS and the SS is reported to the MSS in REG-RSP. During consecutive sleep-windows and listening-windows, comprising a single sleep periods the sleep-interval, sleep-window shall be updated using an exponentially-increasing algorithm—with adjustable minimum and maximum limits as defined in 6.4.16.2 Sleep-window update algorithm.~~

~~Two intervals are defined:~~

#### ~~Sleep-interval~~

#### ~~Listening-interval~~

~~Before entering sleep-mode the MSS-SS shall inform the BS using MOB\_SLP-REQ and obtain its approval. Serving BS shall respond with a MOB\_SLP-RSP message. Serving BS may send an unsolicited MOB\_SLP-RSP to MSS to initiate MSS sleep-mode. Upon Serving BS transmittal of an affirming MOB\_SLP-RSP, Serving BS shall initiate aging timer (MSS Sleep-Aging-Timer, see Table 275a) to coincide with initiation of sleep-interval at start-frame. A after receiving an MOB\_SLP-RSP message from the BS, An-an MSS shall enter sleep-mode by beginning sleep-interval at the appropriate frame proscribed by start-frame.~~

~~An MSS-SS shall awaken, enter into an interleaved listening-window, according to the sleep-interval and check whether there were PDUs addressed for it. The listening-window parameter defines the number of whole frames the MSS shall remain awake waiting for a MOB\_TRF-IND message. Traffic indication message (MOB\_TRF-IND) shall be sent by the BS on the broadcast CID during each appropriate MSS listening-window periodically. If the number of positive indications is zero, the BS sends an empty indication message, that is, MOB\_TRF-IND message with num-positive=0. The BS may buffer (or it may drop) incoming PDUs addressed to the sleeping MSS-SS, and shall a-send notification to the MSS-SS in it's listening-awakening periods-window about whether data has been addressed for it during a preceding interval. If such PDUs exist, #the MSS shall remain awake, terminating the sleep-interval and re-entering Normal Operation.~~

~~An MSS-SS may terminate sleep-mode and return to awake-modeNormal Operation anytime (i.e. there is no need to wait until the sleep-interval is over). If ~~the a~~ Serving BS receives an MPDU from an MSS-SS that is supposed to be in sleep-mode, the BS shall assume that the MSS-SS is no longer in sleep-mode. Any UL message from the MSS to the Serving BS shall interrupt the sleep-interval, shall signal the Serving BS that the MSS is still active and connected and has not dropped connection during its sleep-interval, and the Serving BS shall terminate the aging timer (MSS Sleep-Aging-Timer, see Table 275a).~~

~~Upon completion of When its sleep-interval timeouts, the MSS-SS shall awaken and return to Normal Operation to listen to the DL transmissions until it receives a TRF-IND message. If there is a positive indication to the SS, it shall remain awake. Otherwise, the SS may return to its sleep-mode. The listening-interval parameter defines the number of frames the SS shall remain awake waiting for the TRF-IND message.~~

~~If the intervening interval of MSS absence exceeds the aging timer, then the Serving BS shall assume loss of connection to the MSS and process as if it had received a backbone message announcing another BS becoming the Serving BS for the specified MSS (see section Backbone network HO procedures).~~

*[In 6.4.16.2 Sleep-interval-window update algorithm, page 34, modify with:]*

~~The MSS shall use the following algorithm for calculating the sleep-window duration, in whole frames, for performing the sleep-interval. In the first time it enters sleep-mode, it shall use the initial sleep window value for the sleep interval. If during the following listening interval the BS has not signaled that traffic has been addressed for the MSS, the MSS shall re-enter sleep mode and double the duration of the sleep interval. This procedure shall be repeated as long as the resulting sleep interval does not exceed the final sleep window value. The following formula defines the calculation of the duration of  $k^{\text{th}}$  sleep interval  $I_k$ :~~

$$\left\{ \begin{array}{l} I_k = \min \{ \text{initial-sleep-window} + \text{initial-sleep-window} \cdot \text{sleep-window-factor} \cdot (k-1), \\ \text{final-sleep-window} \} \quad k > 0, k < \text{sleep-window-iterations} \end{array} \right.$$

~~Upon completion of sleep-interval, MSS and BS shall return to Normal Operation. When the MSS has reached the final sleep window size, it shall continue in sleep mode without further increasing the sleep interval.~~

*[In 6.4.16.3 Traffic indication signaling, page 35, modify with:]*

~~A BS shall notify each MSS-SS in sleep-mode, during its listening-intervalwindow, if traffic has been addressed to the MSS during any sleep-window iteration~~it~~. The indication is sent on the MOB TRF-IND broadcast message. The MSS-SS shall examine the frame number from the PHY Synchronization Field during each listening-window and shall verify ~~its~~ synchronization with the BS. If the expected frame number is different than the discovered ~~found~~ frame number, the MSS-SS shall return into awake mode, Normal Operation. Similarly, if the MSS does not find the expected MOB TRF-IND broadcast message, the MSS shall return to Normal Operation.~~

~~If the MSS-SS does not find any positive indication with its CID in the MOB TRF-IND message receives a TRF-IND message with 'num-positive' field = 0, or no CID in the MOB TRF-IND message matches the MSS-SS's basic CID, it shall consider this as a negative indication and shall continue in sleep-sleep-mode. For an example of sleep-sleep-mode operation, see Annex D.~~

[In 10.1 Global Values, page 39&40, change Table 275a to:]

**Table 275a—Parameters and Constants**

System	Name	Time Reference	Min. Value	Default Value	Max. Value
SS	<del>Min_Sleep_Interval</del>	<del>Minimum sleeping time allowed to SS</del>	<del>2 Frames</del>		
SS	<del>Max_Sleep_Interval</del>	<del>Maximum sleeping time allowed to SS</del>			<del>5 Frames</del>
SS	<u>Sleep-window</u>	<u>Calculated sleep portion of the sleep-interval</u>	<u>2 Frames</u>		<u>1024 Frames</u>
SS	<del>Listening_Interval_window</del>	The time duration during which the <u>MSS-SS</u> , after waking up and synchronizing with the DL transmissions, can demodulate downlink transmissions and decides whether to stay awake or go back to sleep	<u>4 Frames</u>		
BS	<del>NBRBEA-ADV</del> interval	Nominal time between transmission of <del>NBRBEA-ADV</del> messages			<del>1s</del> <u>30s</u>
BS	ASC-AGING-TIMER	Nominal time for aging of MSS <del>associations</del> <u>Associations</u>	<del>0.1</del> <u>100ms</u>		
<u>BS</u>	<u>Neighbor_Info</u> interval	<u>Nominal time between transmission of Neighbor_Info</u> messages			<u>600s</u>
<u>BS</u>	<u>Neighbor-Aging-Timer</u>	<u>Nominal time for aging of BS neighbor association and removal from the dynamic Neighbor BS table</u>	<u>3600s</u>		
<u>SS</u>	<u>Serving BS ID AGING-TIMER</u>	<u>Nominal time for aging of Serving BS association. Timer recycles on successful Serving BS DL-MAP read</u>			<u>5s</u>

<u>SS</u>	<u>MSS Sleep-AGING-TIMER</u>	<u>Nominal time for aging of MSS Sleep disconnect.</u>			<u>10500s</u>
<u>BS</u>	<u>MSS Registration-TIMER</u>	<u>Nominal time for aging of MSS registration association with Serving BS. Timer expiration may trigger re-registration, re-broadcast of MSS/Serving BS association, or other action.</u>			<u>86400s</u>

[In 11.1.3 RNG-REQ message encodings, modify Table 289a—RNG-REQ Message Encodings with:]

‘Table 289a—RNG-REQ Message Encodings

Name	Type (1 byte)	Length (1 byte)	Value (Variable-length)
<u>MSS Association Channel ID</u>	<u>4</u>	<u>4</u>	<u>An identifier of the downlink channel on which the MSS is currently registered. The downlink channel identifier is the downlink channel ID field from the DCD message.</u>
Serving BS ID	4	6	<u>the BS ID of the BS to which the MSS is currently connected (has completed complete registration cycle and is in Normal Operation)</u> <u>The unique identifier of the former serving BS</u>
<u>SFID</u>	<u>4</u>	<u>4</u>	<u>BS allocated unique Service Flow identifier as defined in 11.4.9.1</u>
<u>Service Flow encodings</u>	<u>?</u>	<u>n</u>	<u>Service Flow performance specific criteria as defined in 11.4.9</u>

[In 11.1.4 REG-RSP TLVs for connection re-establishment, Table 291a—REG-RSP Encodings, page 41, modify as:]

Table ~~291a~~290a—~~REG~~RNG-RSP message Encodingsencodings

Name	Type (1 byte)	Length (1 byte)	Value (Variable-length)
<u>New_CID</u>	<u>TBD</u>	<u>2</u>	<u>New CID after handover to new BS.</u>
<u>Old_CID</u>	<u>TBD</u>	<u>2</u>	<u>Old CID before handover from old BS.</u>

<u>Connection_Info</u>	<u>TBD</u>	<u>Variable</u>	<u>The Connection_Info is a compound TLV value that encapsulates the Service Flow Parameters and the CS Parameter that have changed for the service. All the rules and settings that apply to the parameters when used in the DSC-RSP message apply to the contents encapsulated in this TLV.</u>
<u>Service Level Prediction</u>	<u>4</u>	<u>1</u>	<u>value indicates the level of service the MSS can expect from this BS.</u>

[Replace 11.1.8 NBR-ADV Message Encodings, page 41, in its entirety with:]

### 11.1.8 NBRMOB BEA-ADV Message Encodings

Table 292a—NBRMOB BEA-ADV Encodings

<u>Name</u>	<u>Type (1 byte)</u>	<u>Length (1 byte)</u>	<u>Value (Variable-length)</u>
<u>Network Type</u>	<u>?</u>	<u>8 bits</u>	<u>0=not specified; 1=managed, restricted; 2=managed, provisional; 3=managed, unrestricted; 4=unmanaged, restricted; 5=unmanaged, provisional; 6=unmanaged, unrestricted; other=reserved</u>
<u>Time Stamp</u>	<u>?</u>	<u>32 bits</u>	<u>Number of milliseconds since midnight GMT (set to 0xffffffff to ignore)</u>
<u>BS Next Beacon</u>	<u>?</u>	<u>16 bits</u>	<u>Estimated time interval in frames until next BS beacon event</u>
<u>BS Next Contention Network Entry</u>	<u>?</u>	<u>8 bits</u>	<u>Estimated time interval in frames until next BS contention based MSS network entry interval; value=0 indicates feature not supported</u>
<u>BS Network Managed Handover Supported</u>	<u>?</u>	<u>1 bit</u>	<u>Binary 0=no; 1=yes</u>
<u>BS Air Interface Advertised Bandwidth</u>	<u>?</u>	<u>32 bits</u>	<u>In bits per second</u>
<u>BS Air Interface Available Bandwidth</u>	<u>?</u>	<u>32 bits</u>	<u>In bits per second</u>
<u>BS Backhaul Advertised</u>	<u>?</u>	<u>32 bits</u>	<u>In bits per second</u>

<u>Bandwidth</u>			
<u>BS Backhaul Available Bandwidth</u>	?	<u>32 bits</u>	<u>In bits per second</u>
<u>N_QoS_Records</u>	?	<u>8 bits</u>	<u>Number of AvailableQoSParamSet Records</u>
<u>For (j=0 ; j&lt;N_QoS_Records ; j++) {</u>			
<u>  Service Class Code</u>	?	<u>8 bits</u>	<u>Code of Service Class in AvailableQoSParamSet</u>
<u>}</u>			
<u>N_Neighbors</u>	?	<u>8 bits</u>	<u>Number of advertised BS neighbors</u>
<u>For (j=0 ; j&lt;N_Neighbors ; j++) {</u>			
<u>  Neighbor BS-ID</u>	?	<u>48 bits</u>	
<u>  Neighbor Operator ID</u>	?	<u>48 bits</u>	<u>Unique Network ID</u>
<u>  Neighbor Network Type</u>	?	<u>8 bits</u>	<u>0=not specified; 1=managed, restricted; 2=managed, provisional; 3=managed, unrestricted; 4=unmanaged, restricted; 5=unmanaged, provisional; 6=unmanaged, unrestricted; other=reserved</u>
<u>  Neighbor Time Stamp</u>	?	<u>32 bits</u>	<u>Number of milliseconds since midnight GMT (set to 0xffffffff to ignore)</u>
<u>  Neighbor BS Next Beacon</u>	?	<u>16 bits</u>	<u>Time interval in frames until next neighbor BS beacon event</u>
<u>  Neighbor BS Next Contention Network Entry</u>	?	<u>16 bits</u>	<u>Time interval in frames until next neighbor BS contention based MSS network entry interval; value=0 indicates feature not supported</u>
<u>  Neighbor BS Network Managed Handover Supported</u>	?	<u>1 bit</u>	<u>Binary 0=no; 1=yes</u>
<u>  Neighbor DCD_Settings</u>	?	Variable	DCD_settings is a compound TLV that encapsulates an entire DCD message (excluding the generic MAC header). All the rules and settings that apply to the DCD message apply to the contents encapsulated in this TLV.
<u>  Neighbor UCD_Settings</u>	?	Variable	UCD_settings is a compound TLV value that encapsulates an entire UCD message (excluding the generic MAC header). All the rules and settings that apply to the UCD message apply to the contents encapsulated in this TLV.

<u>Neighbor BS Air Interface Advertised Bandwidth</u>	?	<u>32 bits</u>	<u>In bits per second</u>
<u>Neighbor BS Air Interface Available Bandwidth</u>	?	<u>32 bits</u>	<u>In bits per second</u>
<u>Neighbor BS Backhaul Advertised Bandwidth</u>	?	<u>32 bits</u>	<u>In bits per second</u>
<u>Neighbor BS Backhaul Available Bandwidth</u>	?	<u>32 bits</u>	<u>In bits per second</u>
<u>Neighbor N_QoS_Records</u>	?	<u>8 bits</u>	<u>Number of AvailableQoSParamSet Records</u>
<u>For (h=0 ; h&lt;N_QoS_Records ; h++) {</u>			
<u>Neighbor Service Class Code</u>	?	<u>8 bits</u>	<u>Code of Service Class in AvailableQoSParamSet</u>
<u>}</u>			
<u>}</u>			

[Add 11.1.9 MOB\_INF-RSP Message Encodings:]

### **11.1.9 MOB\_INF-RSP Message Encodings**

**Table 321a— MOB\_INF-RSP Encodings**

<u>Name</u>	<u>Type (1 byte)</u>	<u>Length (1 byte)</u>	<u>Value (Variable-length)</u>
<u>Home Network ID</u>	?	<u>48 bits</u>	<u>Operator ID of default network to which MSS is associated</u>
<u>Authentication Server Address</u>	?	<u>48 bits</u>	<u>Address of ASA network device that holds the MSS provisioned service profile and account status for the MSS</u>
<u>N_Neighbors</u>	?	<u>8 bits</u>	<u>Number of discovered neighbor BS</u>
<u>For (j=0 ; j&lt;N_NEIGHBORS ; j++) {</u>			
<u>Neighbor BS-ID</u>	?	<u>48 bits</u>	<u>Same as the Base Station ID parameter in the DL-MAP message of neighbor BS</u>
<u>Neighbor BS Operator ID</u>	?	<u>48 bits</u>	<u>the unique network ID shared by an association of BS</u>
<u>Neighbor BS Physical Frequency</u>	?	<u>32 bits</u>	<u>DL center frequency (kHz).</u>
<u>Neighbor BS S/(N + I)</u>	?	<u>8 bits</u>	<u>This parameter indicates the signal to noise and interference ratio measured by the MSS from the particular BS. The value shall be</u>

			<u>interpreted as an unsigned byte with units of 0.25dB</u>
<u>Neighbor BS Service level prediction</u>	<u>?</u>	<u>8 bits</u>	<u>This value indicates the level of service the MSS can expect from this BS. 0 = No service possible for this MSS/service level undetermined; 1 = Some service is available for the MSS; 2 = Service with QoS specified at ASA server (for the MSS identified by the 48-bit MAC address) is available</u>
<u>}</u>			

[Add TLV to 11.3 Configuration file encodings:]

### 11.3.7 MSS Home Attachment address:

For mobile enabled networks, MSS Home Attachment address defines the static reference address location for traffic forwarding mobility models

<u>Type</u>	<u>Length</u>	<u>Value</u>
<u>??</u>	<u>4 or 16</u>	<u>IP Address</u>

[In 11.4.14.1 Listening Interval, page 44, modify as:]

### 11.4.14.1 Listening ~~Interval~~ Window

This field indicates the length in whole frames of listening interval-window for sleep-mode operation.

<u>Type</u>	<u>Length</u>	<u>Value</u>	<u>Scope</u>
44.1	1	Length in frames of listening <u>interval-window</u>	REG-RSP

[In 11.1.4 REG-RSP TLVs for connection re-establishment, relocate, re-format and modify as:]

### 11.4.15 TLV Encodings for Service Flow connection re-establishment during hand-over

#### 11.4.15.1 SFID

Active Service Flow ID being provisioned and re-mapped during hand-over

<u>Type</u> <u>(1 byte)</u>	<u>Length</u> <u>(1 byte)</u>	<u>Value</u>	<u>Scope</u>
<u>?</u>	<u>2</u>	<u>SFID as reported to Target BS through MSS-info backbone message or through Initial Ranging</u>	<u>REG-RSP</u>

**11.4.15.2 New CID**

For MSS during hand-over to a new BS, re-mapping of SFID to new CID

<u>Type</u> <u>(1 byte)</u>	<u>Length</u> <u>(1 byte)</u>	<u>Value</u>	<u>Scope</u>
<u>?</u>	<u>2</u>	<u>CID assigned by</u> <u>Target BS onto</u> <u>which Service Flow</u> <u>is to be mapped</u>	<u>REG-RSP</u>

**11.4.15.3 Connection Info**

A compound TLV value that encapsulates the **Service Flow Parameters** and the **CS Parameters** that have changed for the Service Flow during hand-over. All the rules and settings that apply to the parameters when used in the DSC-RSP message apply to the contents encapsulated in this TLV.

<u>Type</u> <u>(1 byte)</u>	<u>Length</u> <u>(1 byte)</u>	<u>Value</u> <u>(variable length)</u>	<u>Scope</u>
<u>?</u>	<u><i>n</i></u>	<u>Compound TLV</u> <u>value encapsulating</u> <u>changed Service</u> <u>Flow Parameters</u> <u>and CS Parameters</u> <u>during hand-over</u> <u>remapping of</u> <u>Service Flow</u>	<u>REG-RSP</u>

*[In C.1 Backbone network services, page 44, change Table C1: ]*

**Table C1—Backbone Network Services**

<b>Service</b>	<b>Possible Method for Providing service</b>	<b>Comments</b>
Backhaul for traffic	-	Default transport protocol is UDP.
Provide a BS with the identity of its neighbors	(1) Get info from ASA server (2) Configuration (network management) <u>(3) Build list from MOB_SS_INF-RSP obtained from MSS</u>	Options (1) and (2) are really the same, the only difference is where the configuration is done
Provide a BS with the identity of the ASA server	(1) ASA server publishes its presence (2) Configuration (network	Message format and transport protocol need to be specified for interoperability

	management)	
Advertise the fact that a certain MSS has registered with a certain BS	(1) BS notifies ASA server (2) BS notifies neighbor BS	Message format and transport protocol need to be specified for interoperability
Provide a BS information about a certain MSS	(1) ASA server provides information (2) Serving BS provides information (or network management if serving BS cannot be found)	Message format and transport protocol need to be specified for interoperability
Information exchange during HO	(1) ASA server is in the middle (2) BS to BS direct exchange	Message format and transport protocol need to be specified for interoperability
<u>Provide Neighbor Notification request</u>	<u>Sending BS notifies affiliated BS that Sending BS considers affiliated BS a Neighbor for Neighbor BS purposes</u>	<u>Message format and transport protocol need to be specified for interoperability.</u>
<u>Provide Neighbor Notification response</u>	<u>Affiliated BS response to Sending BS request for Neighbor BS designation</u>	<u>Message format and transport protocol need to be specified for interoperability.</u>
<u>Provide Neighbor Notification confirmation</u>	<u>Sending BS confirmation of Affiliated BS response to Sending BS request for Neighbor BS affiliation</u>	<u>Message format and transport protocol need to be specified for interoperability.</u>

[In C.2.2 I-am-host-of message, page 45, paragraph 1, modify paragraph as:]

### C.2.2 HO complete/Serving BS notification message C.2.2 I-am-host-of message

This message is sent by a BS to notify other BS (or the ASA server) that a certain MSS is registered with it. The primary use is to notify previous Serving BS and/or ASA or other network services access control administrator that MSS has successfully completed network entry or hand-over and that the BS originating the HO complete/Serving BS notification message is now the Serving BS for the MSS. The message ~~shall~~ may be sent upon MSS establishment of normal operation~~registration~~, and periodically on timer interval (MSS Registration-TIMER-TBD period). The message might trigger a neighbor-Neighbor BS to request more information on the MSS (either directly from the ~~sender~~ Serving BS, or from ~~the an~~ ASA server). The message contains the following information,

### Table C3—HO complete/Serving BS notification message Table C3—I am-host-of Message

[In C.2.4 MSS-info-response message, Table C5—MSS-info-response Message, page 46, modify as:]

### Table C5—MSS-info-response Message

Field	Size	Notes
Global Header	152 bits	
For (j=0; j<Num Records; j++) {		
<del>MSS-unique-identifier</del> <u>SS MAC Address</u>	48 bits	48-bit unique identifier used by MSS ( <del>as provided by the MSS or by the I-am-host-of-message</del> )
<u>Current Basic CID</u>	<u>16 bits</u>	<u>Basic CID assigned by current Serving BS at initial ranging</u>
<u>Current Primary Management CID</u>	<u>16 bits</u>	<u>Primary Management CID assigned by current Serving BS at initial ranging</u>
<u>Current Secondary Management CID</u>	<u>16 bits</u>	<u>Secondary Management CID assigned by current Serving BS at registration</u>
<u>Current MSS Network Address</u>	<u>48 bits</u>	<u>MSS Network Address assigned by current Serving BS at establish IP connectivity</u>
N_NSIE	<u>8 bits</u>	Number of Network Service Information Elements
For (k=0; k<N_NSIE; k++) {		
Field Size	16 bits	Size of TLV encoded information field below
TLV encoded information	Variable	TLV information as allowed on a <del>DSADSx-REQ</del> <u>xxx MAC message consistent with parameters necessary for Target BS to issue an unsolicited DSA-RSP to MSS during re-registration and to build SFID and Connection_Info</u>
}		
N_SAIE	<u>8 bits</u>	Number of Security Association Information Elements
For (k=0; k<N_SAIE; k++) {		
Field Size	16 bits	Size of TLV encoded information field below
TLV encoded information	Variable	TLV information as allowed on a PKM-xxx MAC messages
}		
N_SS_CAP	<u>8 bits</u>	Number of <u>MSS-SS</u> Capabilities
For (k=0; k<N_SAI <u>ESS_CAP</u> ; k++) {		
Field Size	16 bits	Size of TLV encoded information field below
TLV encoded information	Variable	TLV information as allowed on a SBC-REQ MAC message
}		
<u>N_REG</u>		<u>Number of Registration Items</u>
<u>For (k=0; k&lt;N_REG; k++) {</u>	<u>8 bits</u>	
<u>Field Size</u>	16 bits	Size of TLV encoded information field below
<u>TLV encoded information</u>	Variable	TLV information as allowed on a <del>SBCREG-REQ</del> <u>xxx MAC message consistent with parameters necessary for Target BS to issue an unsolicited REG-RSP to MSS during re-</u>
<u>}</u>		
}		

Security Field	TBD	A means to authenticate this message
CRC field	32 bits	IEEE CRC-32

[In C.2.7 HO-notification-confirm message, page 48, entire section, modify as:]

### C.2.7 HO complete/Serving BS notification acknowledge message

#### ~~C.2.7 HO-notification-confirm message~~

~~A BS may send a HO complete/Serving BS notification acknowledge message to acknowledge receipt of a HO complete/Serving BS notification message. This message is sent from one BS to another BS, typically in response to an HO-notification-response message. The message serves to provide the BS that sent the HO-notification-response message with information about the level of service and capability. The message contains the following information:~~


**Table C8— HO complete/Serving BS notification acknowledge message**


**Table C8—HO-notification Message**

Field	Size	Notes
Global Header	152 bits	
<del>For (j=0; j&lt;Num Records; j++) {</del>		
<del>—MSS-unique-identifier</del>	48 bits	48-bit universal MAC address of the MSS (as provided to the BS on the RNG-REQ message)
<del>—QoS-Estimated</del>	8 bits	Bandwidth which is provided by BS (to guarantee minimum packet data transmission) TBD how to set this field
<del>—BW-Estimated</del>	8 bits	Quality of Service level <del>—Unsolicited Grant Service (UGS)</del> <del>—Real-time Polling Service (rtPS)</del> <del>—Non-real-time Polling Service (nrtPS)</del> <del>—Best Effort Service (BE)</del>
<del>}</del>		
Security Field	TBD	A means to authenticate this message
CRC Field	32-bits	IEEE CRC-32

[In C.2.8 Example of Backbone Network HO procedure, pages 48-50, delete Figure C.2—Example of HO call flow by BS entirely and replace Figure C.1—Example of HO call flow by MS with:]

**Figure C.1—Example of HO Process Flow**

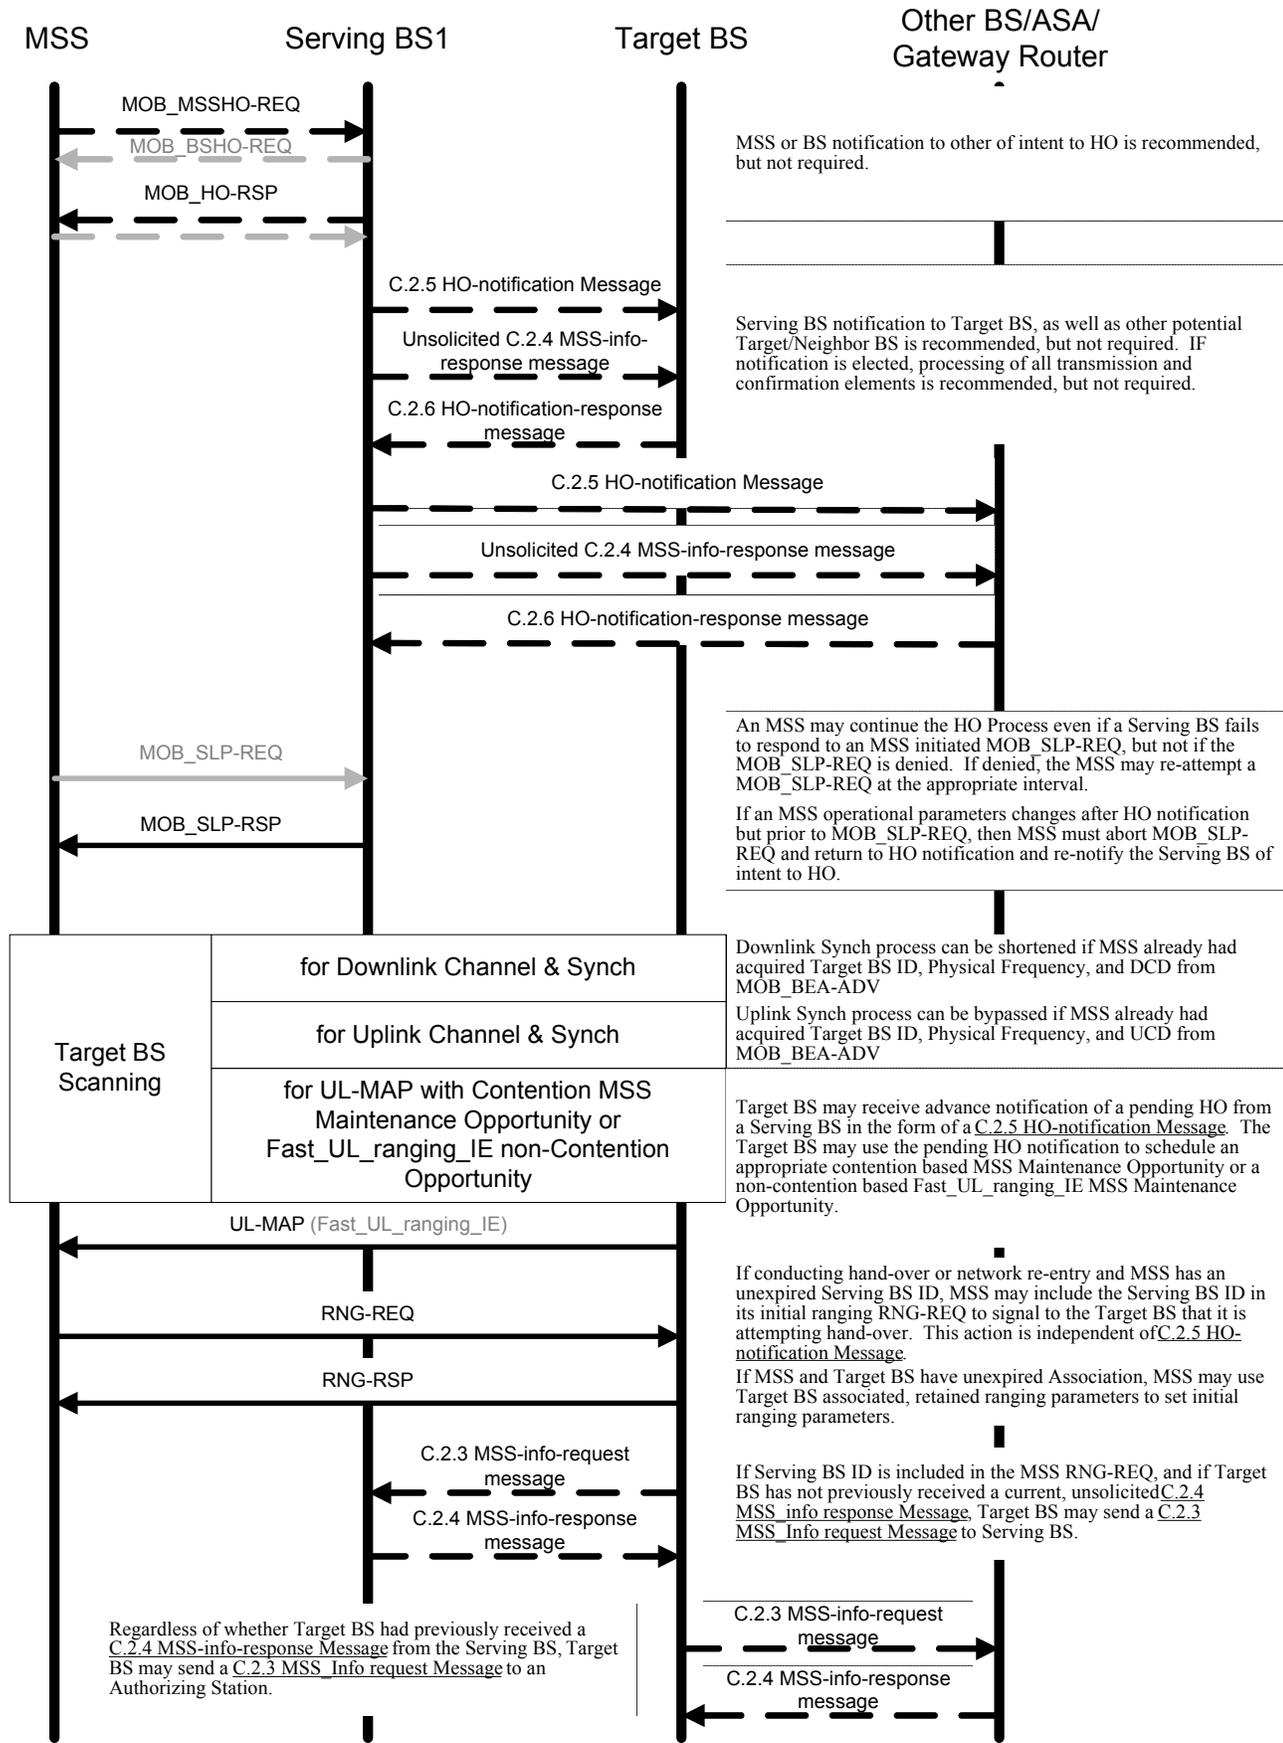

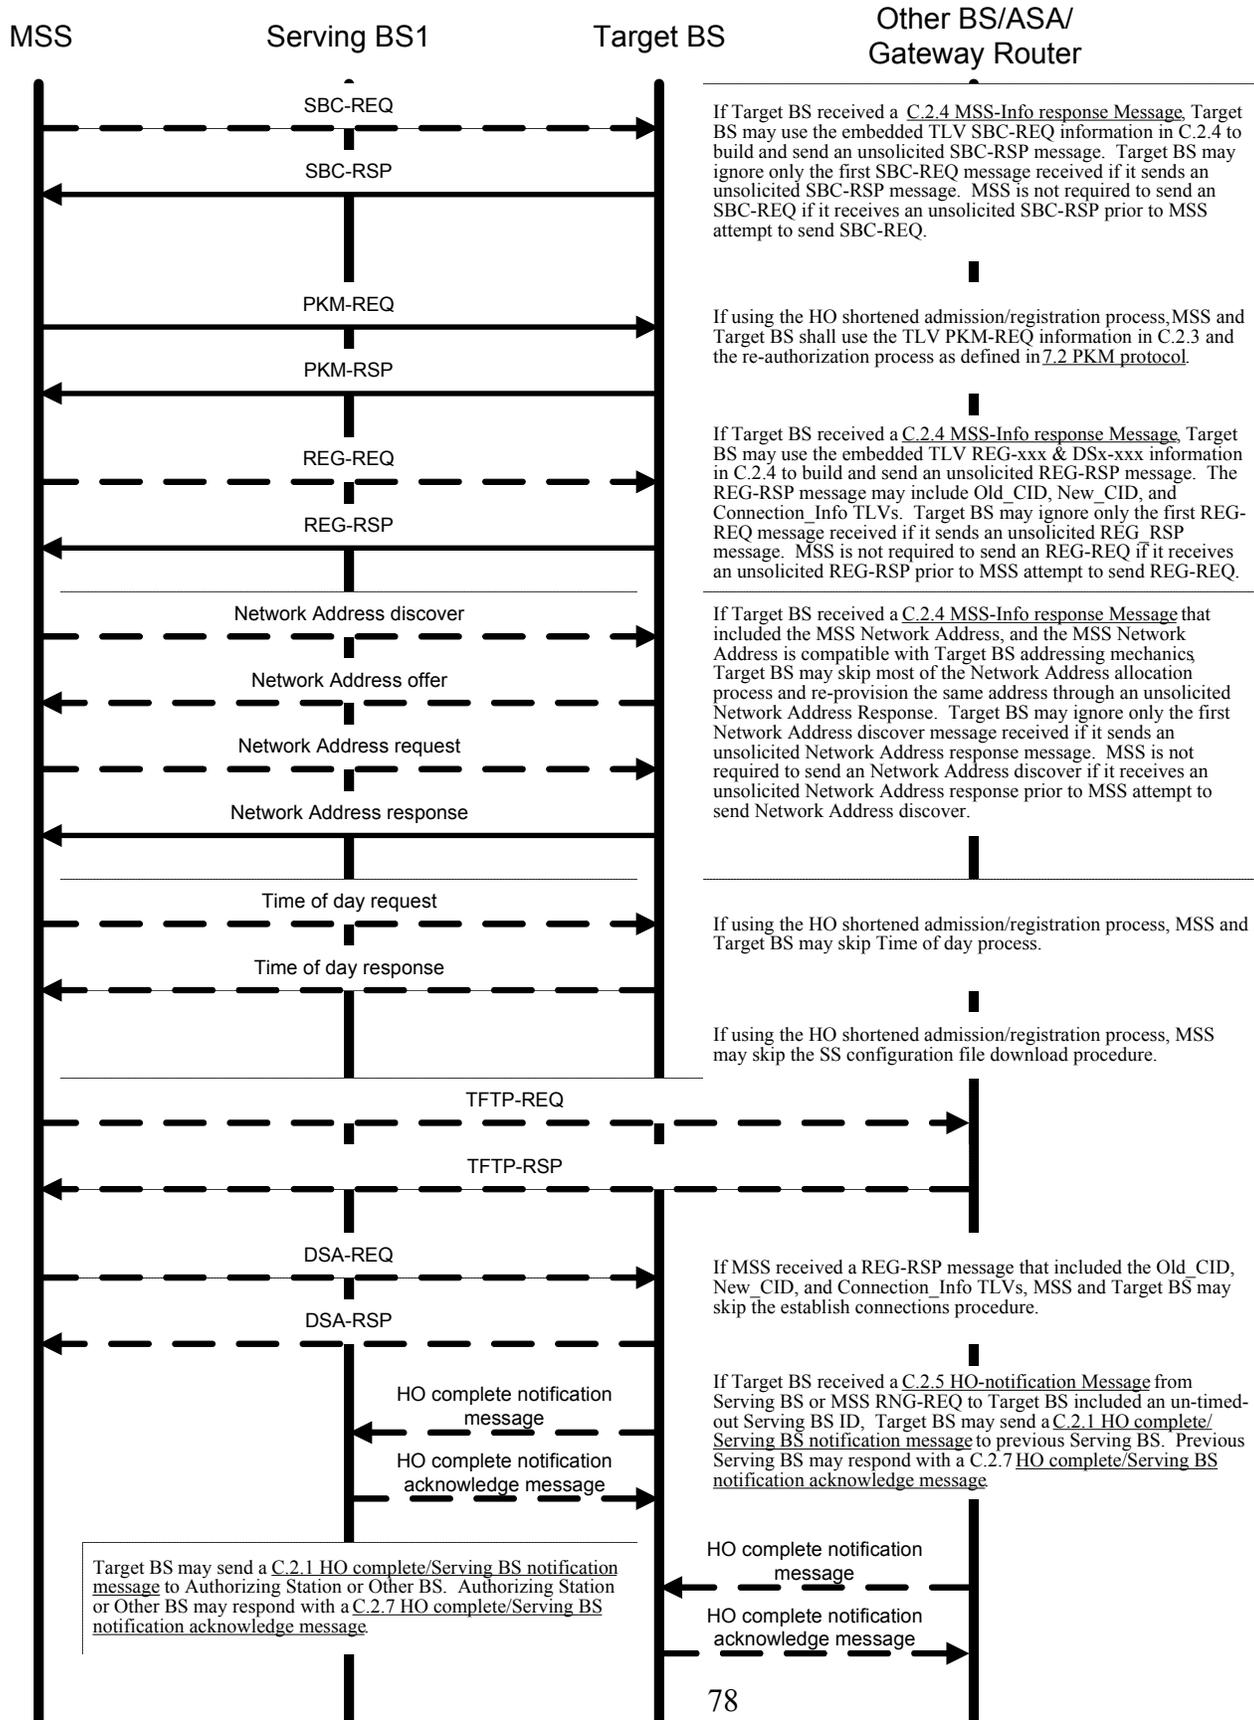

[Add new sub-sections to C.2 Inter-base station message formats:]

### **C.2.9 Neighbor Notification.request message**

An originating BS may send a Neighbor Notification.request to another BS indicating it considers the BS a Neighbor BS.

**Table C9—Neighbor Notification request message**

<b><u>Field</u></b>	<b><u>Size</u></b>	<b><u>Notes</u></b>
<u>Global Header</u>	<u>152 bits</u>	
<u>Security Field</u>	<u>TBD</u>	<u>A means to authenticate this message</u>
<u>CRC Field</u>	<u>32 bits</u>	<u>IEEE CRC-32</u>

[Add new sub-sections to C.2 Inter-base station message formats:]

### **C.2.10 Neighbor Notification.response message**

A notified BS shall respond with a Neighbor Notification.response message confirming or denying a Neighbor Notification request. If the neighbor relationship is affirmed, both BS shall place each other on their dynamic Neighbor BS tables and begin aging timer (Neighbor-Aging-Timer, see Table 275a).

**Table C10—Neighbor Notification response message**

<b><u>Field</u></b>	<b><u>Size</u></b>	<b><u>Notes</u></b>
<u>Global Header</u>	<u>152 bits</u>	
<u>ACK/NACK</u>	<u>1 bit</u>	<u>Acknowledgement or Negative acknowledgement.</u> <u>0=Negative acknowledgement which means that the notified BS refuses to accept neighbor association with the originating BS</u> <u>1=Acknowledgement which means that the notified BS accepts neighbor association with the originating BS</u>
<u>Security Field</u>	<u>TBD</u>	<u>A means to authenticate this message</u>
<u>CRC Field</u>	<u>32 bits</u>	<u>IEEE CRC-32</u>

[Add new sub-sections to C.2 Inter-base station message formats:]

**C.2.11 Neighbor Notification confirmation message**

The originating BS shall confirm acknowledgement of receipt of the Neighbor\_Notification.response using a Neighbor\_Notification confirmation message.

**Table C11—Neighbor Notification confirmation message**

<u>Field</u>	<u>Size</u>	<u>Notes</u>
<u>Global Header</u>	<u>152 bits</u>	
<u>Security Field</u>	<u>TBD</u>	<u>A means to authenticate this message</u>
<u>CRC Field</u>	<u>32 bits</u>	<u>IEEE CRC-32</u>

*[Add new sub-sections to C.2 Inter-base station message formats:]*

**C.2.12 Neighbor Info message**


Each BS may send a Neighbor\_Info message on periodic intervals (Neighbor\_Info interval, see Table 275a) to each other BS on its Neighbor BS table. Also, immediately following sending of a positive Neighbor\_Notification.response message, the notified BS shall send a Neighbor\_Info message to the originating BS of the Neighbor\_Notification request message.

**Table C12—Neighbor Info message**

<u>Field</u>	<u>Size</u>	<u>Notes</u>
<u>Global Header</u>	<u>152 bits</u>	
<u>BS ID</u>	<u>48 bits</u>	<u>Base station unique identifier (Same number as that broadcasted on the DL-MAP message)</u>
<u>Operator ID</u>	<u>48 bits</u>	<u>Unique Network ID</u>
<u>Network Type</u>	<u>8 bits</u>	<u>0=not specified; 1=managed, restricted; 2=managed, provisional; 3=managed, unrestricted; 4=unmanaged, restricted; 5=unmanaged, provisional; 6=unmanaged, unrestricted; other=reserved</u>
<u>Time Stamp</u>	<u>32 bits</u>	<u>Number of milliseconds since midnight GMT (set to 0xffffffff to ignore)</u>
<u>BS Next Beacon</u>	<u>16 bits</u>	<u>Time interval in frames until next BS beacon event</u>
<u>BS Next Contention Network Entry</u>	<u>8 bits</u>	<u>Time interval in frames until next BS contention based MSS network entry interval; value=0 indicates feature not supported</u>
<u>BS Network Managed Handover</u>	<u>1 bit</u>	<u>Binary 0=no; 1=yes</u>

<u>Supported</u>		
<u>BS Air Interface Advertised Bandwidth</u>	<u>32 bits</u>	<u>In bits per second</u>
<u>BS Air Interface Available Bandwidth</u>	<u>32 bits</u>	<u>In bits per second</u>
<u>BS Backhaul Advertised Bandwidth</u>	<u>32 bits</u>	<u>In bits per second</u>
<u>BS Backhaul Available Bandwidth</u>	<u>32 bits</u>	<u>In bits per second</u>
<u>N_QoS_Records</u>	<u>8-bits</u>	<u>Number of AvailableQoSParamSet Records</u>
<u>For (j=0 ; j&lt;N_QoS_Records ; j++) {</u>		
<u>  Service Class Code</u>	<u>8 bits</u>	<u>Code of Service Class in AvailableQoSParamSet</u>
<u>}</u>		
<u>Security Field</u>	<u>TBD</u>	<u>A means to authenticate this message</u>
<u>CRC Field</u>	<u>32 bits</u>	<u>IEEE CRC-32</u>

*[In Annex D.2, page 61, replace **Figure D.10**, **D.11**, and **D.12** entirely with:]*

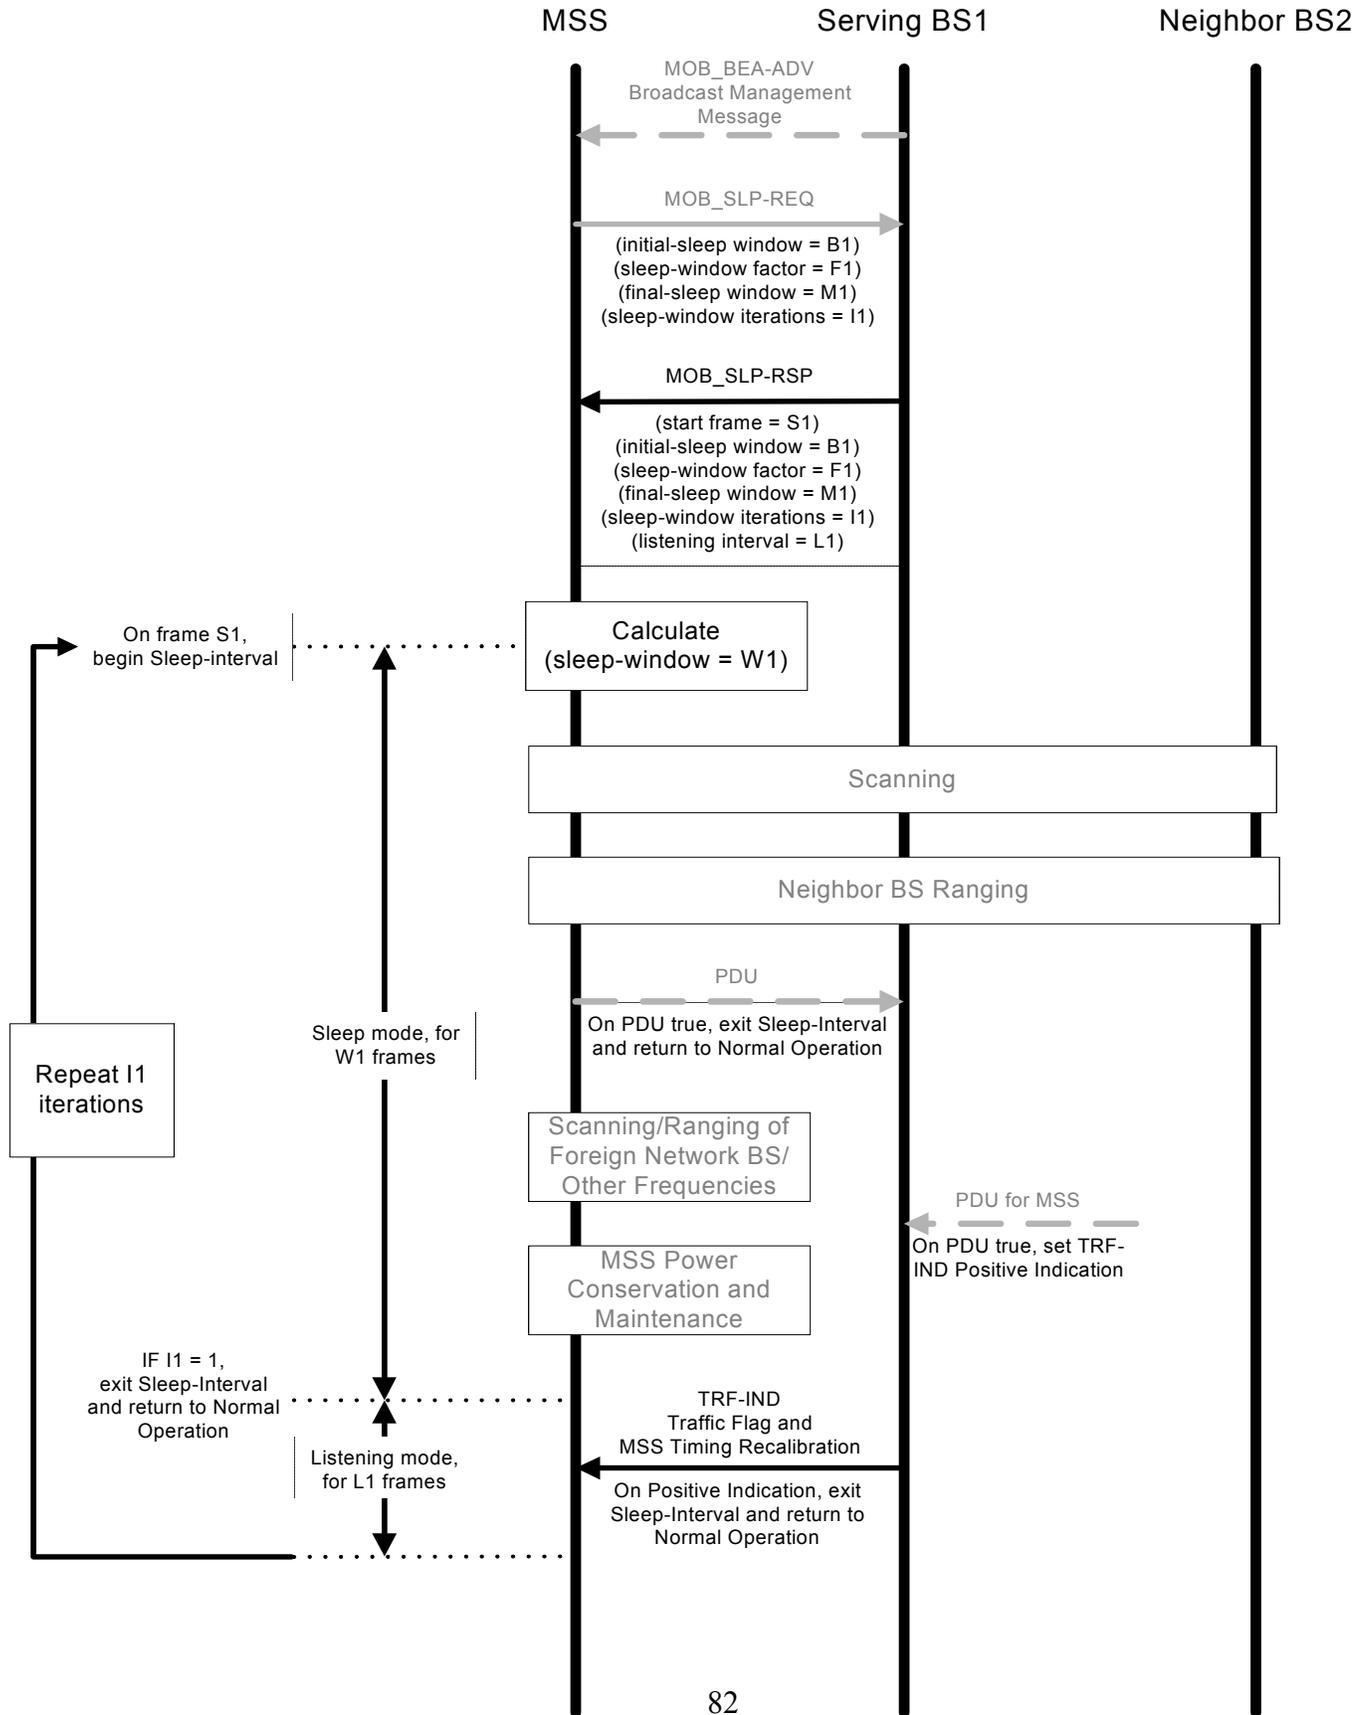

**Figure D.10—Sleep mode**