

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	A Modified Chase Combining for H-ARQ	
Date Submitted	2004-6-28	
Source(s)	Jun Wu, Wenzhong Zhang, Yonggang Fang, Keqiang Zhu, Mary Chion, Irving Wang ZTE San Diego, 10105 Pacific Heights Blvd. San Diego, CA 92121	Voice: 858-554-0387 Fax: 858-554-0894 E-mail: wzhang@ztesandiego.com , jwu@ztesandiego.com
Re:	For consideration in Working Group Recirculation Ballot #14b, on P802.16d/D3.	
Abstract	A modified chase combining for H-ARQ is proposed.	
Purpose	Adoption	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate text contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) <http://ieee802.org/16/ipr/patents/policy.html>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard."</p> <p>Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:r.b.marks@ieee.org> as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site <http://ieee802.org/16/ipr/patents/notices>.</p>	

A Modified Chase Combining for H-ARQ

*Jun Wu, Wenzhong Zhang, Yonggang Fang, Keqiang Zhu, Mary Chion, Irving Wang
ZTE San Diego, Inc.*

1. Introduction

The conventional Chase Combining (CCC) always retransmits the same FEC block, for high rate code, the punctured bit will never have a chance to be transmitted. Here we proposed a Modified Chase Combining (MCC) method which take the puncture pattern into account, and try to balance the bit to be transmitted. MCC method still can be apply to all kinds of channel coding system (Non-punctured code can be regarded as a special case).

The basic idea of MCC is: for each retransmission, the coded block is not the same anymore. Different puncture patterns are used to create the retransmission FEC block. The puncture patterns are predefined and can be selected based on retransmission number. At the receiver, the received signals are depunctured according to its specific puncture pattern which is decided by the current retransmission number, then the combination is performed at bit metrics level. The pros of the modified CC are:

1. The combined version becomes a low rate code instead of a punctured code because of the puncture pattern change. The additional coding gain can be obtained. Our simulation results show nearly 1 dB addition gain over CCC in both AWGN and Rayleigh fading channel.
2. The retransmission block length can be flexible by choosing the puncture pattern with different puncture length.
3. The decoding complexity is almost the same as CCC, and is much lower than IR.
4. Compatible with CCC which is proposed by [1]
5. Only minor modification is needed based on [1]

2. Performance simulation results

The MCC H-ARQ scheme is evaluated over both AWGN and uncorrelated Rayleigh fading channel. The modulation is QPSK. The channel coding scheme is $\frac{3}{4}$ punctured convolutional code, which is a puncture version from $\frac{1}{2}$ mother code is. In the simulation, 3 retransmission is allowed, the puncture pattern for each transmission is

$$[1,0,1;1,1,0]; [0,1,1;1,0,1]; [1,1,0;0 1 1]; [1,1,0;1,0,1].$$

The simulation results are showed in Fig.1 and Fig.2. The MCC has almost 1 dB gain compared to conventional CC H-ARQ over AWGN. In Rayleigh fading channel, the gain is even better (about 3dB)

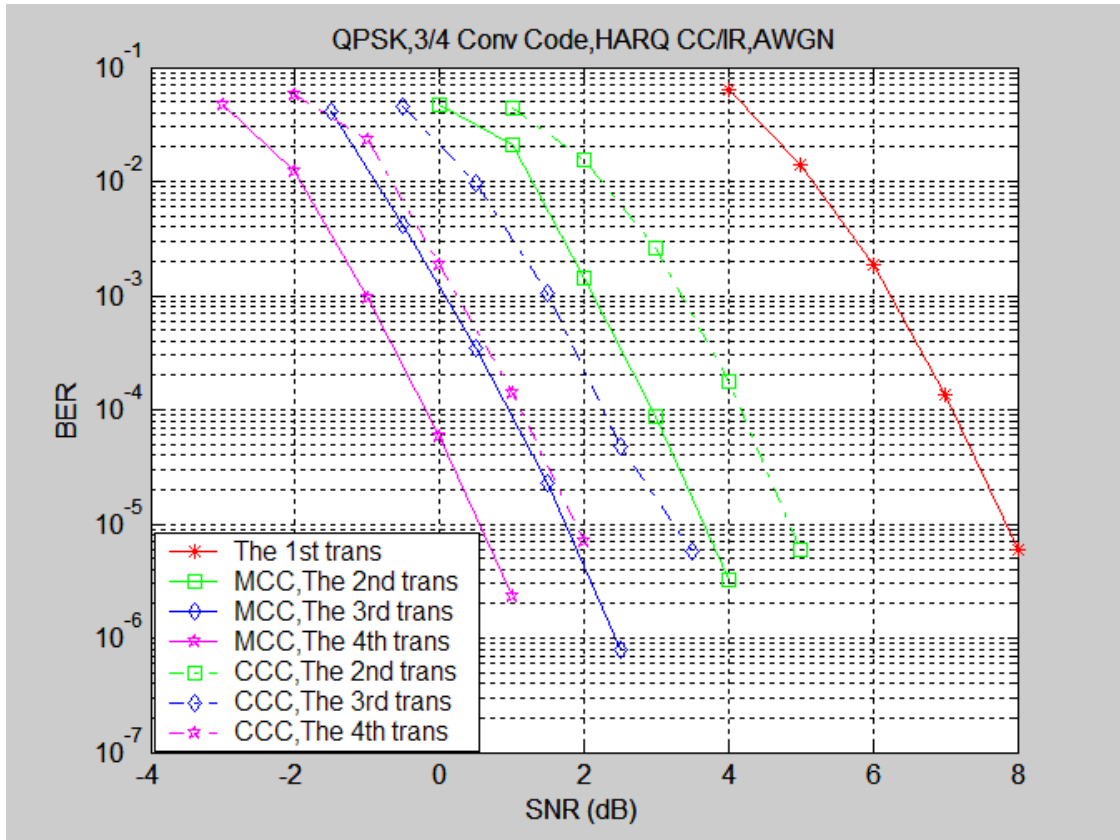


Fig.1 The modified CC H-ARQ scheme performance over AWGN

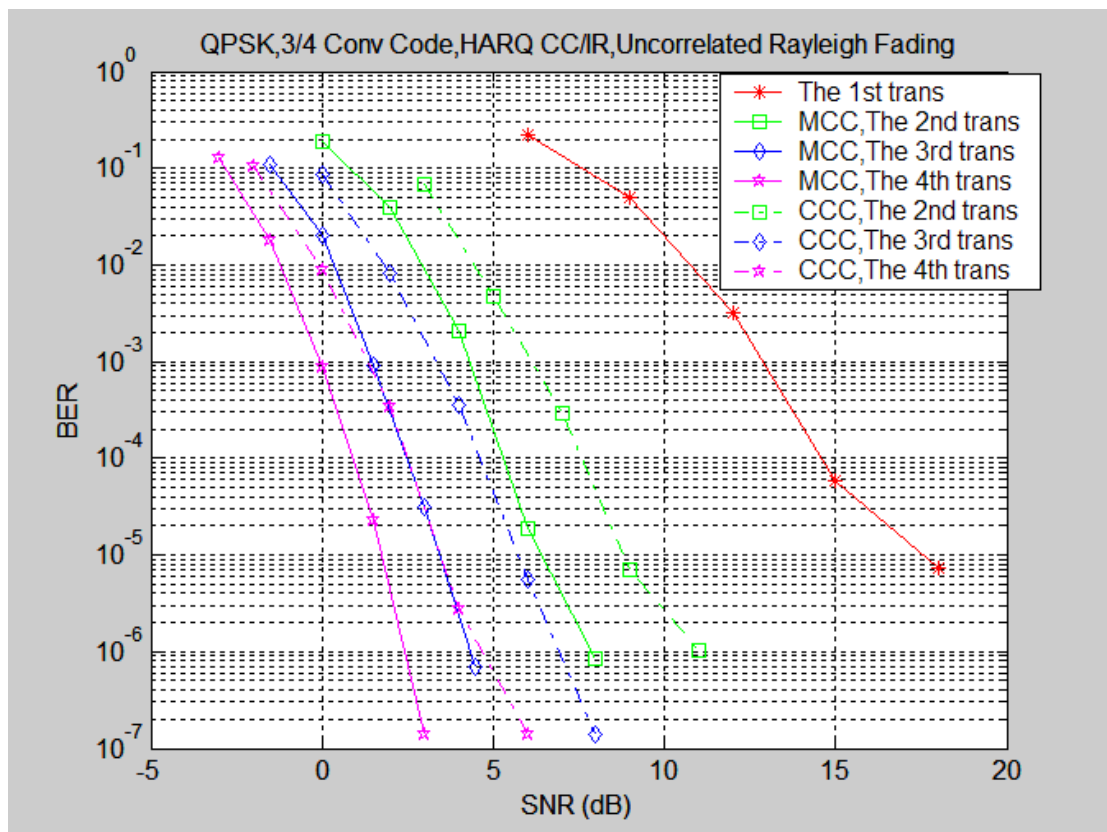


Fig.2 The modified CC H-ARQ scheme performance over uncorrelated Rayleigh fading

3. Proposed Text Change

Based on proposal [1], only minor changed is needed.

a. Modify table AAA to add MCC mode

b. Add the following text

6.4.17.1 Subpacket generation

When MCC mode is defined, the FEC encoder is responsible for generating subpackets based on the predefined puncture pattern. The subpacket are combined by the receiver after de-puncturing.

c. Modify the SPID in H_ARQ Control IE: delete reserved.

d. In other tables where Generic appears, add MCC

e. Add the puncturing pattern table for each rate and each SPID

Table BBB Puncture pattern table

4. Reference

[1] [IEEE C802.16e-04/136](#) , Chase H-ARQ support for all FEC schemes, by Mark Cudak, Brian Classon (Motorola) & Valentine J.Rhodes (Intel)