


P802.3bt D3.0 – Creating margin in the unbalance specification v104

Info (not part of baseline)

The core parameter for 4-pair unbalance is $I_{Con-2P-usb}$ and $I_{Peak-2P-usb}$. $I_{Con-2P-usb}$ is defined in the PSE section (Table 145–16) as a **minimum**. Three distinct requirements hinge on it:

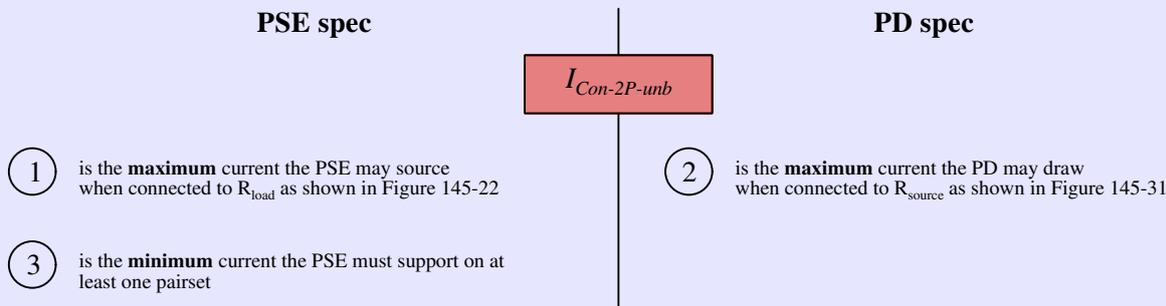

Because the same parameter is used for all 3 requirements, there is no margin between the maximum current that can flow (and must be supported), and the minimum current that a PSE must support. Additionally, because $I_{Con-2P-usb}$ is defined as a minimum, but used twice as a maximum, we have the potential for confusion.

Requirements 1 and 2 are very tightly coupled together with the definitions of R_{source} and R_{load} . As such they are hard to change without large impact. Hence this baseline will decouple requirement 3 from $I_{Con-2P-usb}$ and create a new parameter for it: $I_{Unbalance-2P}$.

$I_{Con-2P-usb}$ then becomes a clear **maximum** parameter, which is used both for the PSE and the PD.

Note — the same applies to $I_{Peak-2P-usb}$, however it is more complicated because this parameter is not a constant. That first needs to be resolved before we can give it a similar treatment.

Note — darshan_xx modifies the values of $I_{Con-2P-usb}$, these values take precedence over what is here

145.2.8 Power supply output

Change Table 145–16 as follows:

Item	Parameter	Symbol	Unit	Min	Max	PSE Type	Additional information
5	Pairset current including unbalance effect per the assigned Class, when powering single-signature PDs						
	Pairset current for PSE and PD, including unbalance, per the assigned Class (for single-signature PDs)						
	Class 1 to 4	$I_{Con-2P-usb}$	A	0.55	I_{Con}^a	3,4	See 145.2.8.5, and 145.2.8.5.1, and 145.3.8.10.
	Class 5			0.55	0.55	3,4	
	Class 6			0.682	0.682	3,4	
Class 7	0.781			0.781	4		
Class 8	0.932			0.932	4		

Insert new item into Table 145–16, after item 5, as follows:

Item	Parameter	Symbol	Unit	Min	Max	PSE Type	Additional information
5a	Supported pairset current to account for unbalance per the assigned Class (for single-signature PDs)						
	Class 1 to 4	$I_{Unbalance-2P}$	A	I_{Con}^a		3,4	See 145.2.8.5 and 145.2.8.5.1.
	Class 5			0.56		3,4	
	Class 6			0.69		3,4	
	Class 7			0.79		4	
Class 8	0.94				4		

145.2.8.5 Continuous output current capability in the POWER_ON state

PSEs shall be able to source $I_{\text{Con-2P}}$, the current the PSE supports on each powered pairset, as defined in Equation (145–8).

Replace Equation 145–8 as follows (changes highlighted in red):

$$I_{\text{Con-2P}} = \left\{ \begin{array}{ll} P_{\text{Class}}/V_{\text{PSE}} & \text{when in 2-pair mode} \\ \min(I_{\text{Con}} - I_{\text{Port-2P-other}}, I_{\text{Unbalance-2P}}) & \text{when 4-pair powering a single-signature PD} \\ P_{\text{Class-2P}}/V_{\text{PSE}} & \text{when 4-pair powering a dual-signature PD} \end{array} \right\}_A \quad (145-8)$$

where

...
 ~~$I_{\text{Con-2P-unb}}$~~ is the current a PSE is able to source on a pairset due to unbalance as defined in Table 145–16
 $I_{\text{Unbalance-2P}}$ is the current a PSE is able to source on a pairset to account for pair-to-pair unbalance
 ...

When powering a single-signature PD over 4 pairs, a PSE supports:

- A total current of I_{Con} defined in Equation (145–9), over both pairs with the same polarity;
- A minimum current of ~~$I_{\text{Con-2P-unb}}$~~ $I_{\text{Unbalance-2P}}$ over one of the pairs of the same polarity under maximum unbalance condition (see 145.2.8.5.1) in the POWER_ON state.