

Relay Station Modes - design objectives of relaying frame structure

IEEE 802.16 Presentation Submission Template (Rev. 8.3)

Document Number:

IEEE S802.16j-06/205

Date Submitted: 2006-11-07

Source:

Kanchei (Ken) Loa, Yung-Ting Lee, Yi-Hsueh Tsai,
Heng-Iang Hsu, Shiann-Tsong Sheu
Institute for Information Industry
8F., No. 218, Sec. 2, Dunhua S. Rd.,
Taipei City, Taiwan.

Voice: 886-2-2739-9616
Fax: 886-2-2378-2328
E-mail: loa@nmi.iii.org.tw

Hang Zhang, Mark Naden, Wen Tong, Peiyong Zhu,
Derek Yu David Steer, Gamini Senarath, G.Q. Wang
Nortel
3500 Carling Avenue
Ottawa, Ontario K2H 8E9

Voice: +1 613 7631315
E-mail: WenTong@nortel.com

Venue:

IEEE 802.16 Session #46, Dallas, USA

Base Document:

IEEE 802.16j-06/027: "Call for Technical Proposals regarding IEEE Project P802.16j"

Purpose:

This contribution is to provide a analysis framework for designing relaying frame structure.

Notice:

This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release:

The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.

IEEE 802.16 Patent Policy:

The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures <<http://iee802.org/16/ipr/patents/policy.html>>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <<mailto:chair@wirelessman.org>> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.16 Working Group. The Chair will disclose this notification via the IEEE 802.16 web site <<http://iee802.org/16/ipr/patents/notices>>.

Outline


- 1. Why RS Modes?*
- 2. Categories of RS Modes*
 - a) 16j network topologies*
 - b) Deployment examples*
 - c) Relay Usage Models*
- 3. Summaries*

Why RS Modes?

- In order to provide coverage extension and/or throughout enhancement in a Multihop Relay system under limited radio resources, the deployment of the MR-BS and RS should be flexible enough to accommodate several modes of RSs co-exist in a Multihop Relay system.
- Moreover, an RS could adaptively change its mode depending on the operation environment especially in mobility.

Relay Station Modes

- RS Modes are categorized by the frequency allocation, frame-start DL preamble, segment ID, and cell ID
- Because segment ID and cell ID have to be derived from the frame-start DL preamble, each RS mode is mainly characterized based on the frequency and frame-start DL preamble.

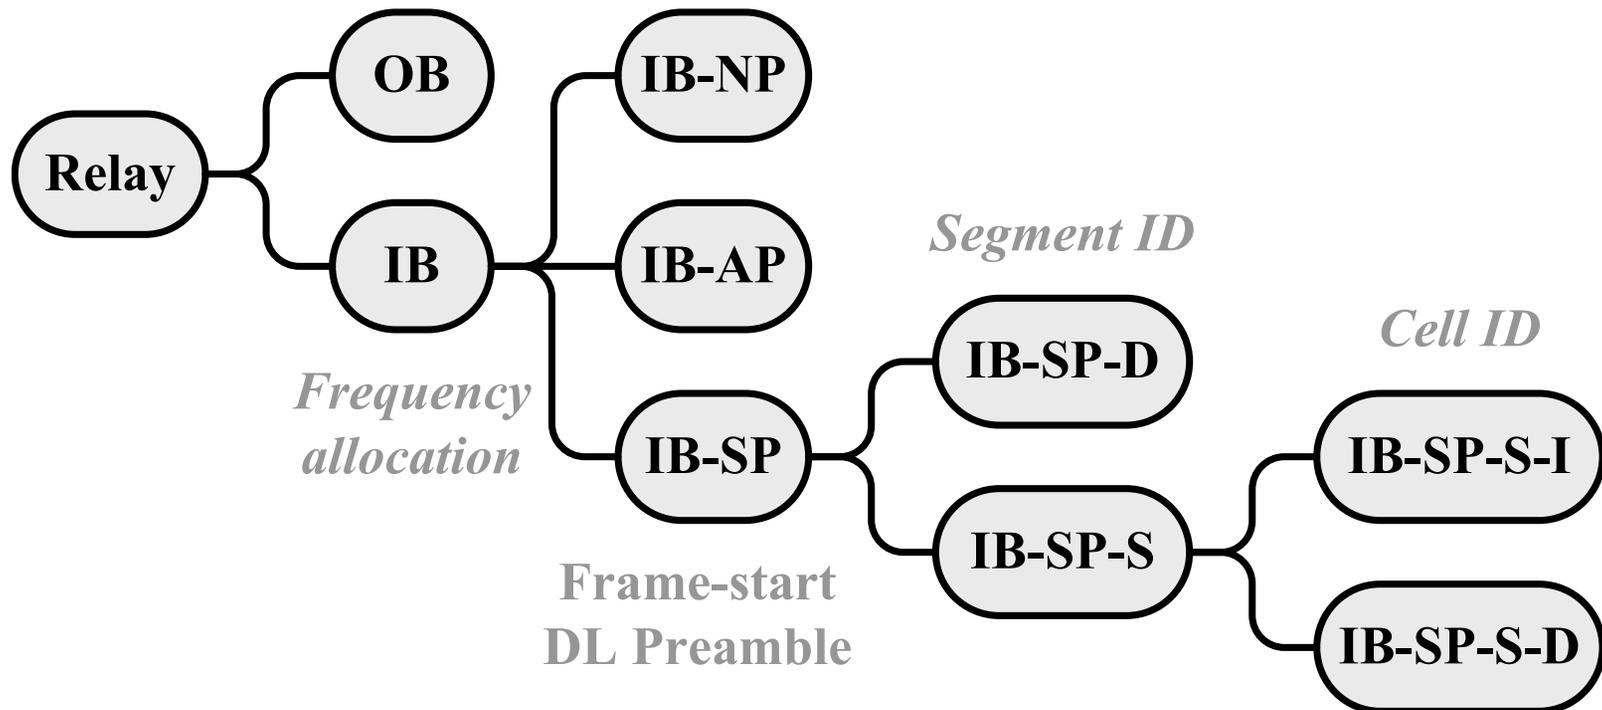

Relay Station Modes (cont.)

- **OB RS** operating at different frequency from the serving MR-BS and shall transmit a frame-start DL preamble independently of the MR-BS.
- **IB-NP RS** does not transmit any frame-start DL preamble. It could be used when all MSs in the RS cell can successfully decode the FCH sent by the serving MR-BS (Ex: relaying the upstream traffic to MR-BS only)
- **IB-AP RS** transmits a frame-start DL preamble at separated OFDMA symbols from those used by the serving MR-BS. RS introduces extra overheads such as preamble, FCH, etc., in each hopping level and, hence, it requires a larger frame duration to accommodate the overheads, which could limit the MS and RS mobility.
- **IB-SP-D RS** transmits a frame-start DL preamble on same OFDMA symbols that are the same as those used by the serving MR-BS. The frame-start DL preambles sent by the RS and MR-BS are with different segment ID.

Relay Station Modes (cont.)

- ***IB-SP-S-I RS*** transmits a frame-start DL preamble using the same OFDMA symbols as the serving MR-BS. The frame-start DL preamble sent by RS is identical to the one sent by the serving MR-BS. In case that an MS receives signals from the serving MR-BS and RS simultaneously, the two frame-start DL preambles and FCHs are treated as multipath signals.
- ***IB-SP-S-D RS*** transmits a frame start DL preamble using the same OFDMA symbols as the serving MR-BS. The frame-start DL preamble sent by RS is different from the one sent by the serving MR-BS but the two preambles are with same segment ID. In case that an MS receives the frame-start DL preambles and FCHs from the serving MR-BS and RS simultaneously, it must be mitigated as co-channel interference.


Relay Station Modes

(Comparison Table)

Mode	Tx Frame-start DL Preamble (Tx Timing relative to MR-BS)	Same Segment ID as MR-BS	Same Cell ID as MR-BS
OB	Yes (Don't Care)	Possible	Possible
IB-NP	No (N/A)	N/A	N/A
IB-AP	Yes (Asynchronous)	Possible	Possible
IB-SP-D	Yes (Synchronous)	No	No
IB-SP-S-I	Yes (Synchronous)	Yes	Yes
IB-SP-S-D	Yes (Synchronous)	Yes	No


802.16j Network Topology

(Simple Scenario: each RS only in one tier)

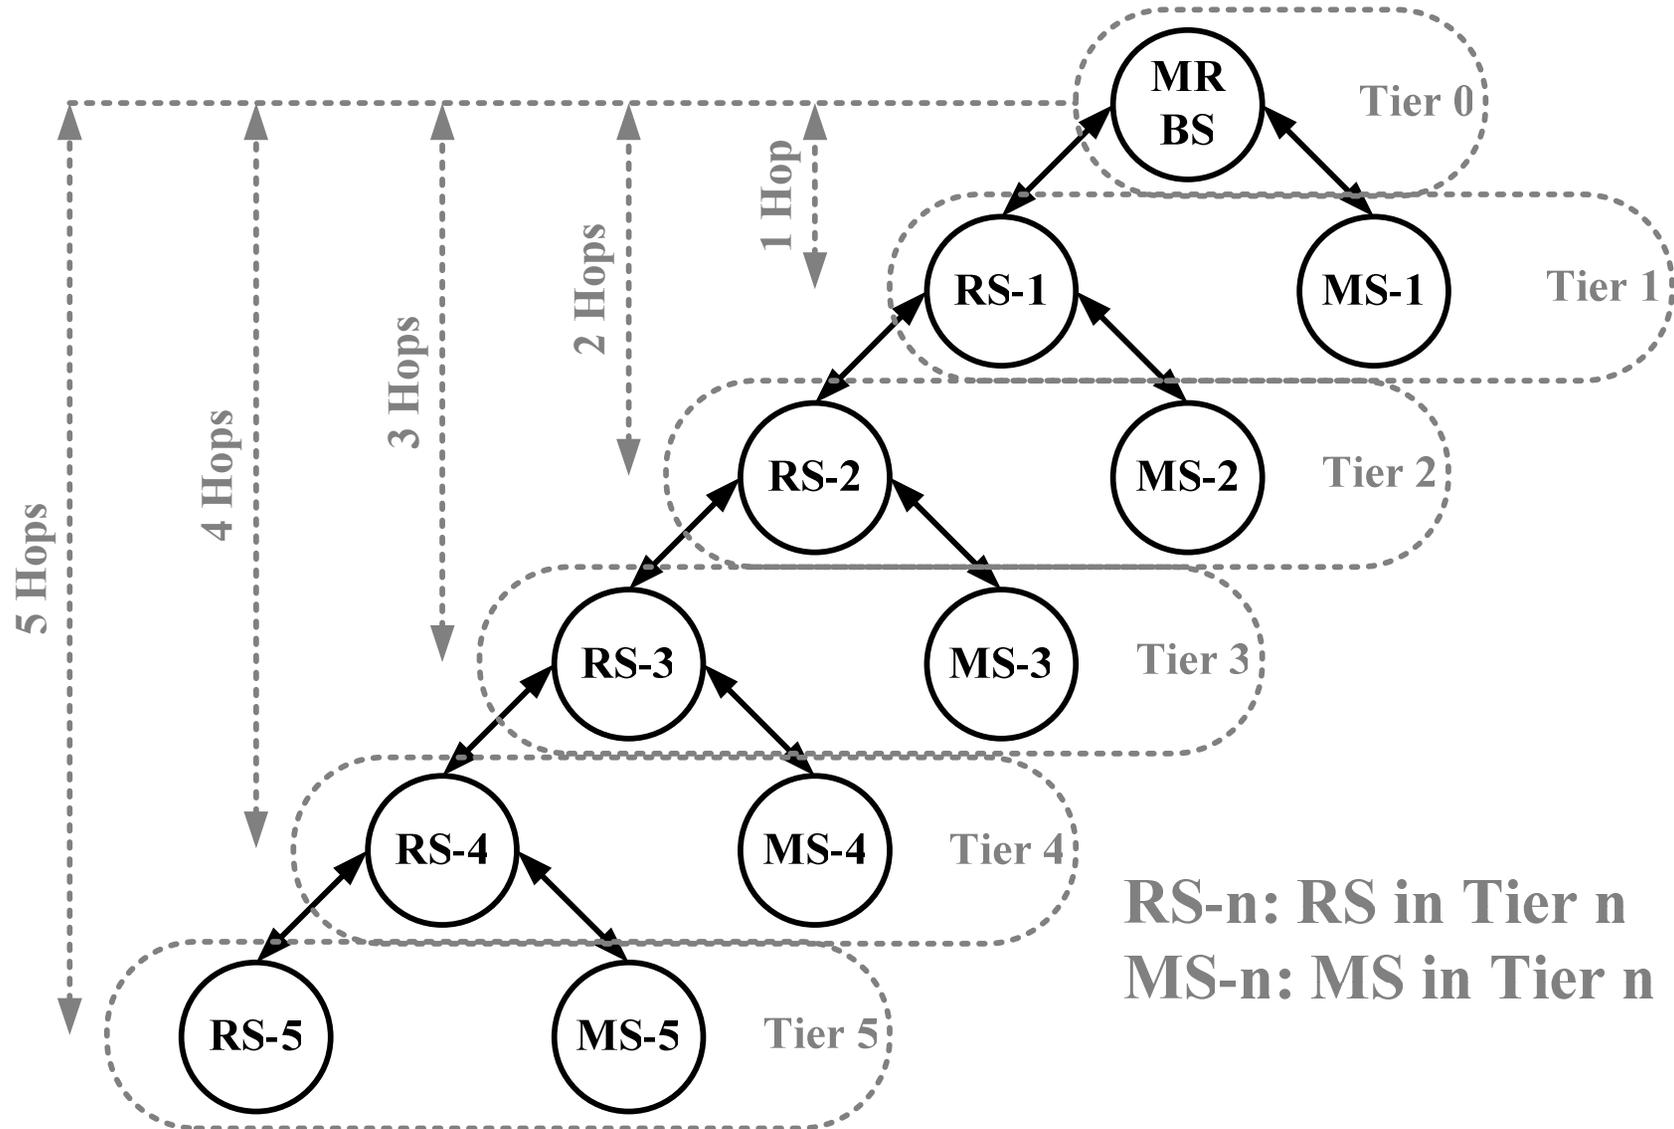


802.16j Network Topology

(Complex Scenario: one RS in more than one tiers)

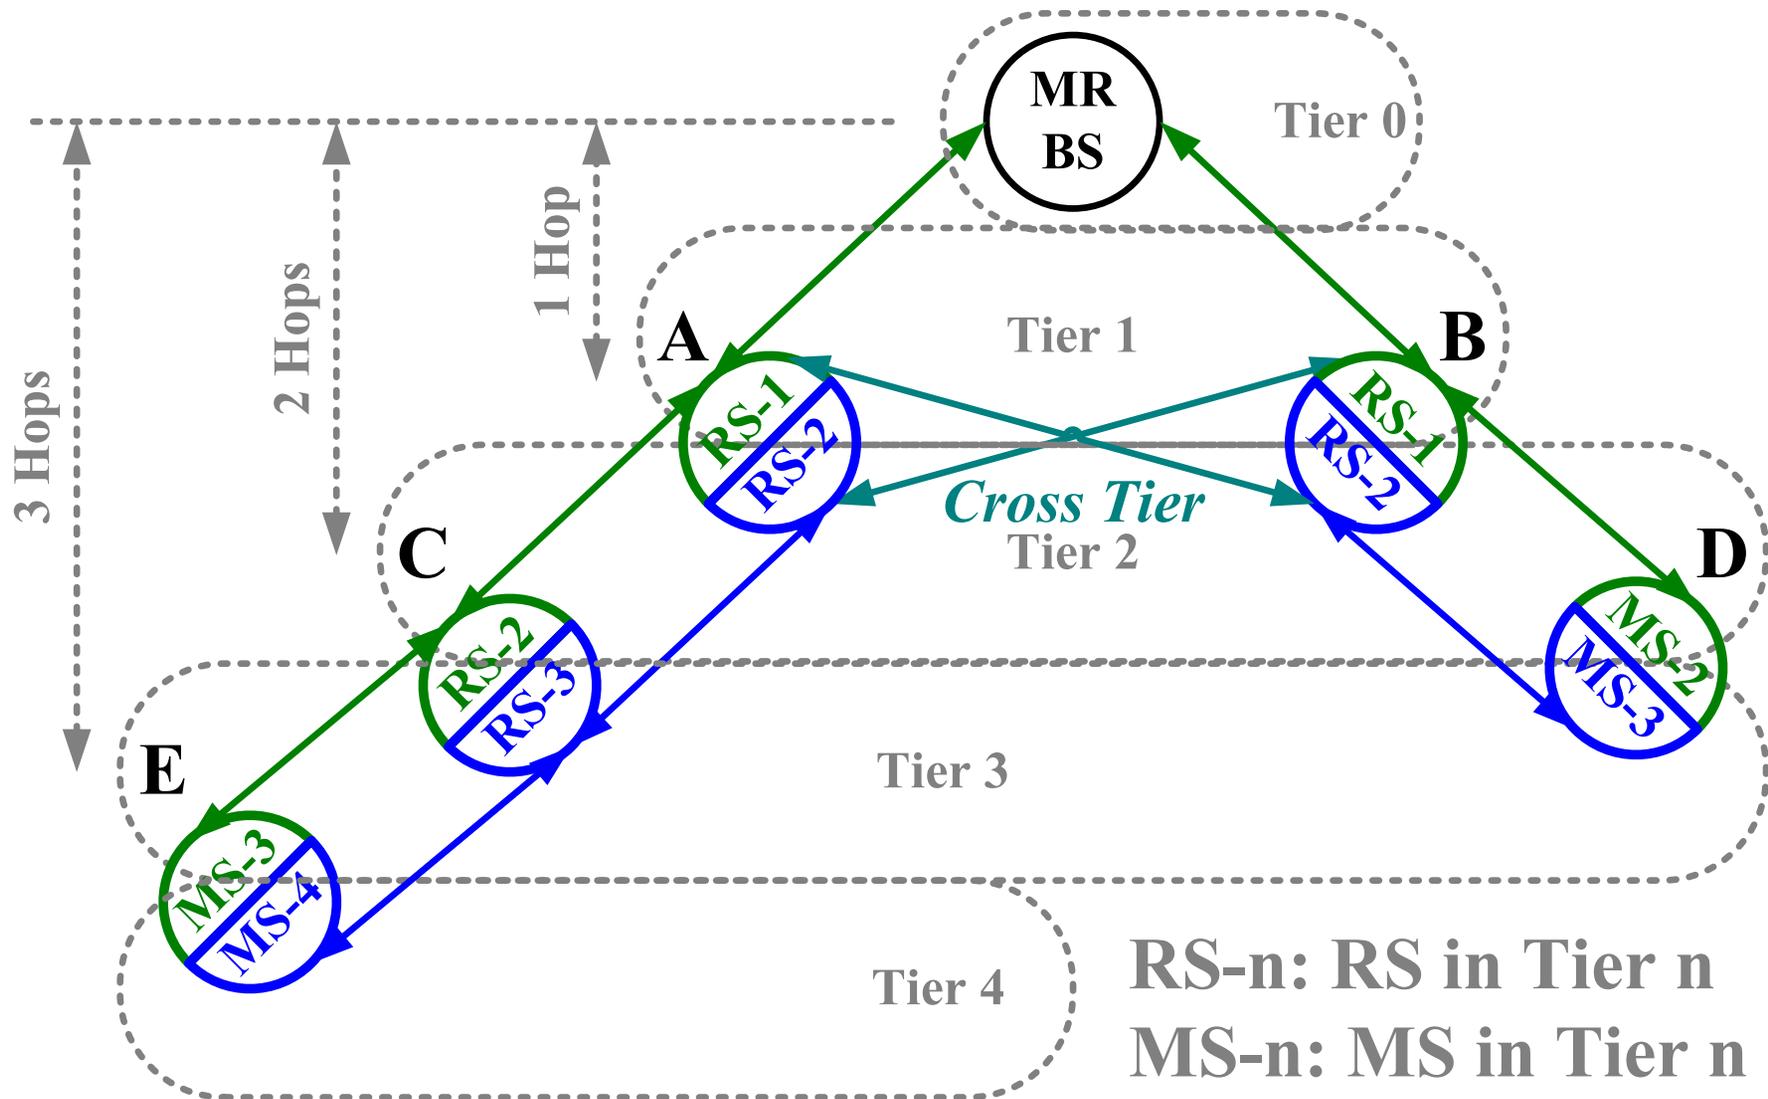


Deployment Example of RS Modes

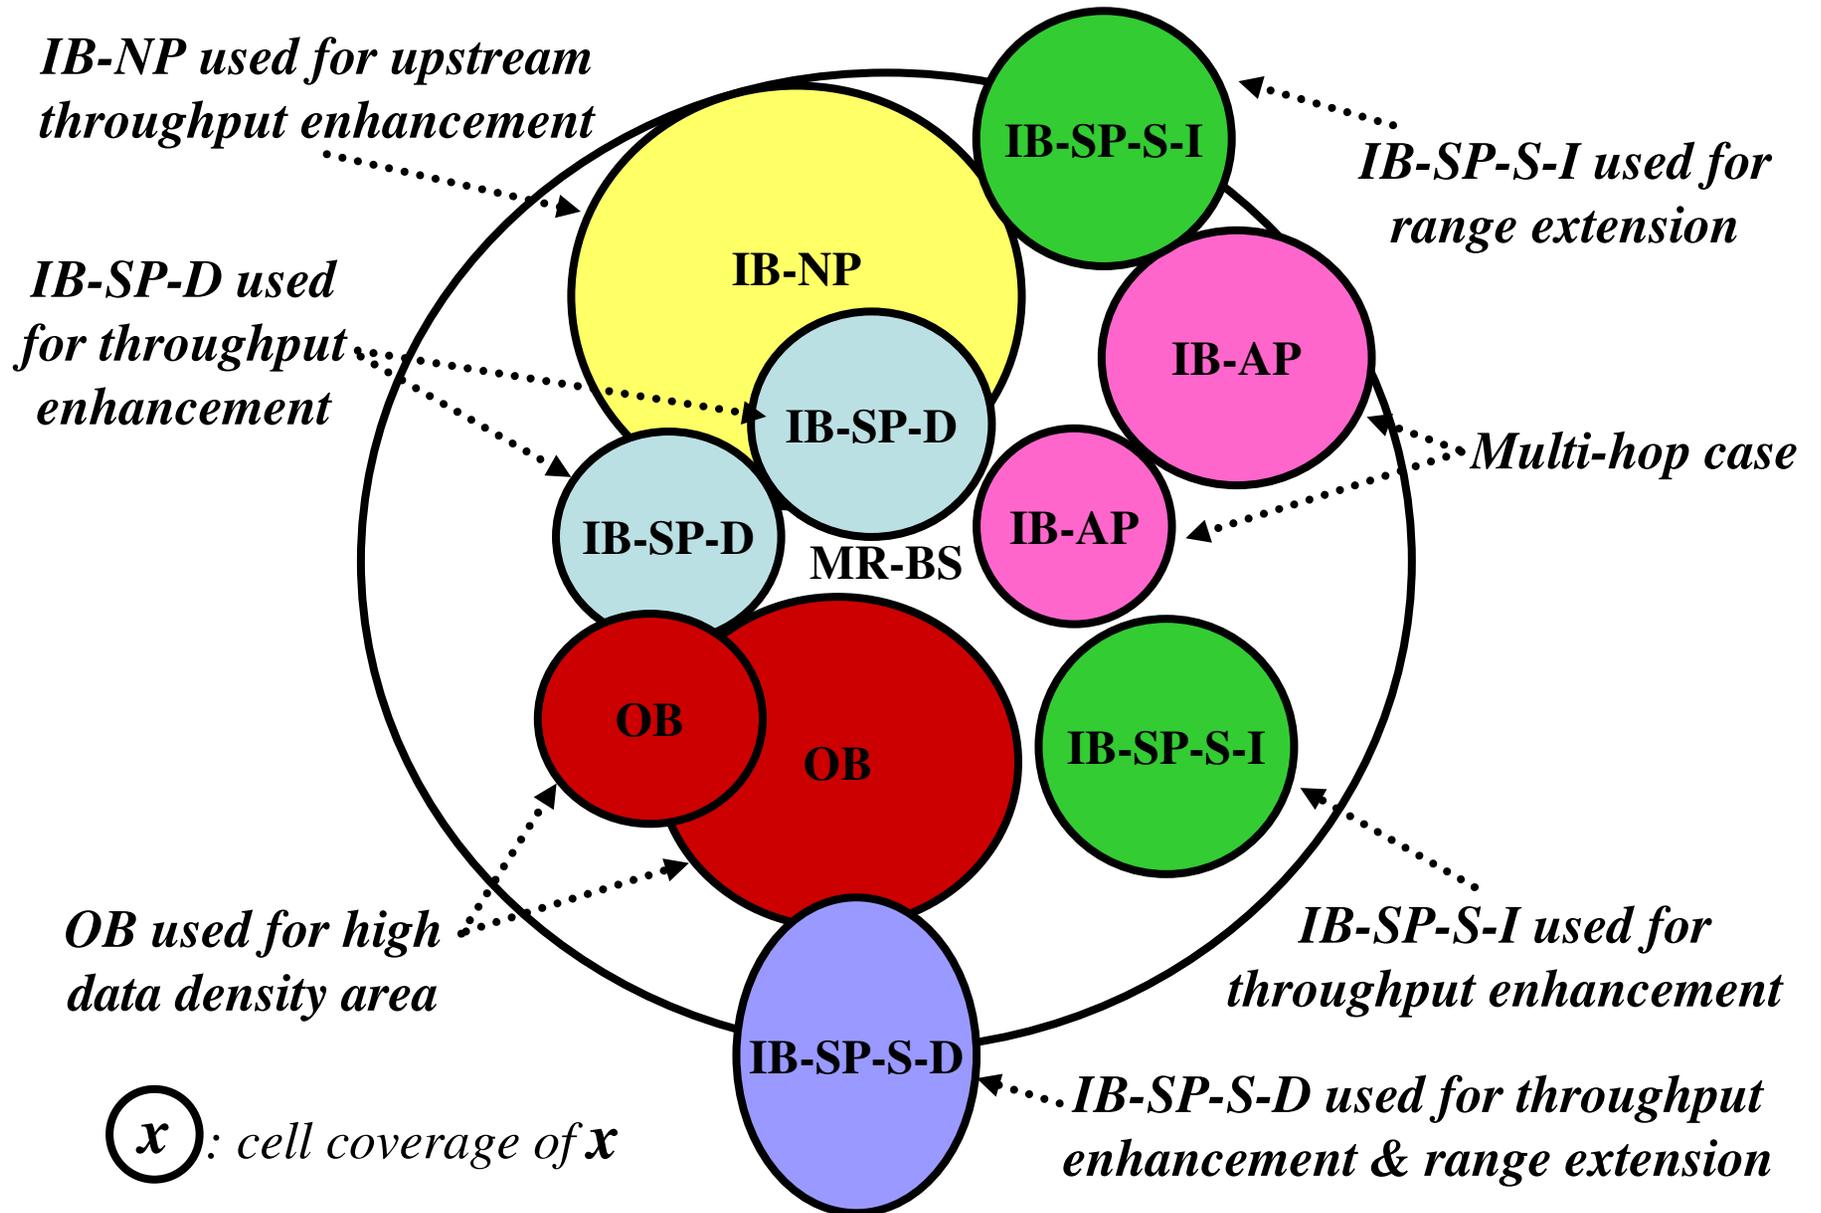

Deployment Example

Using Channel Segmentation for Multiple Tiers

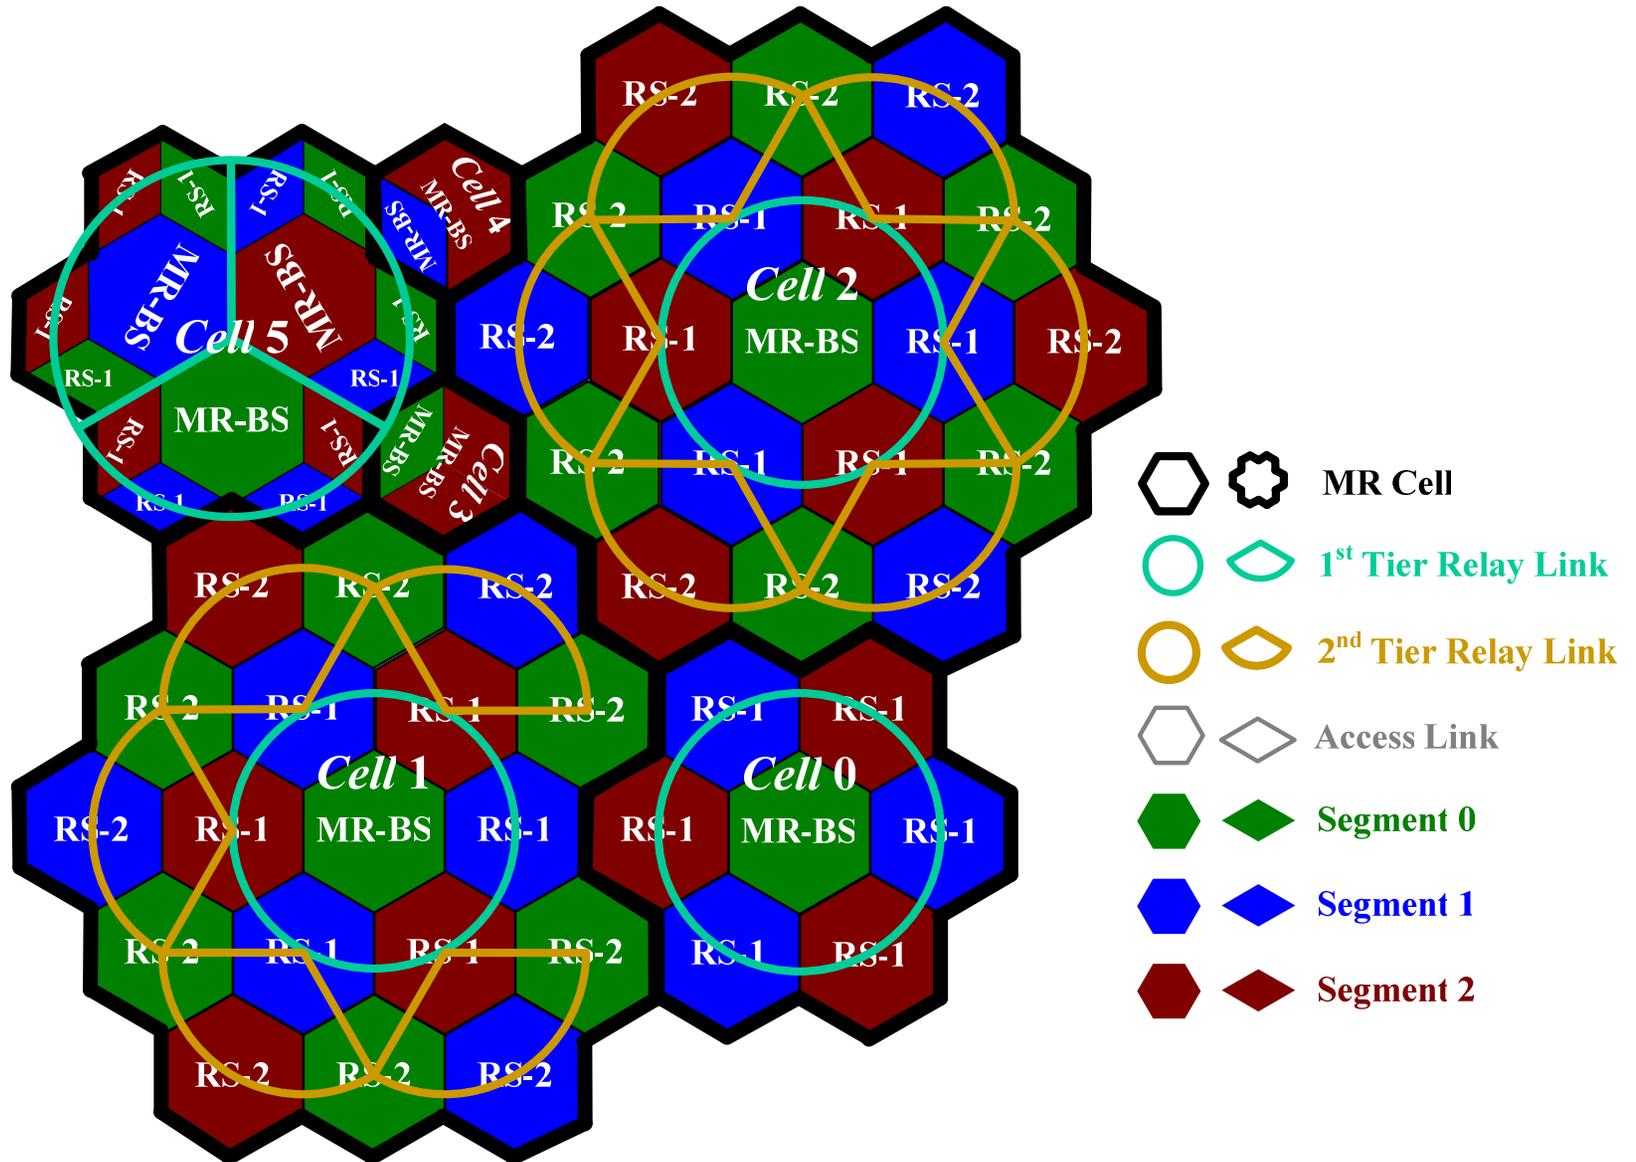

Relay Usage Models

- **Pure Throughput Enhancement Usage Model**
 - MS inside an RS coverage can correctly decode the FCH sent from serving MR-BS
- **Pure Ranging Extension Usage Model**
 - MS inside an RS coverage cannot correctly decode the FCH sent from serving MR-BS
- **Mixed Operation Usage Model**
 - Some MSs inside an RS coverage can correctly decode FCH from serving MR-BS while others MSs cannot

Comparison of Different RS Modes

- *OB, IB-AP, IB-SP-D, IB-SP-S-I* and *IB-SP-S-D* work in all usage models
- *IB-NP* works only when the MS inside the IB-NP RS coverage can correctly decode the FCH sent from serving MR-BS or another RS

Summaries

1. Various modes of RSs could co-exist in a Multihop Relay system
2. Design objectives of relaying frame structure
 - a) should accommodate different modes of RS
 - b) should support Mobile RS
 - c) should be flexible to support RS of more than 2-hop
 - d) should support scenarios of complex topology
 - e) should minimize transmission overheads and relaying path delay based on implementation considerations
 - f) should maximize concurrent transmissions among MR-BS, RS and MS

Annex

Preamble Usage Definition

frame-start DL Preamble										5	
DL-MAP		FCH	DL-MAP		FCH	DL-MAP		FCH			4
Burst #2	DL burst #1 (carrying the UL-MAP)		Burst #2	DL burst #1 (carrying the UL-MAP)		Burst #2	DL burst #1 (carrying the UL-MAP)		Burst #3	A+1	
	Burst #3			Burst #4			Burst #3			Burst #2	
FUSC Zone										A+5	
AAS (P)		AAS (P)		AAS (P)		AAS (P)		AAS (P)		AAS (P)	
AAS Burst #1		AAS Burst #2		AAS Burst #1		AAS Burst #2		AAS Burst #3		AAS Burst #4	
AAS-DLFP		AAS-DLFP		AAS-DLFP		AAS-DLFP		AAS-DLFP		AAS-DLFP	
AAS Burst #1		AAS Burst #2		AAS Burst #3		AAS Burst #4		AAS Burst #5		AAS Burst #1	
AAS (P)		AAS (P)		AAS (P)		AAS (P)		AAS (P)		AAS (P)	
AAS Burst #1		AAS Burst #2		AAS Burst #3		AAS Burst #4		AAS Burst #5		AAS Burst #1	
AAS-DLFP		AAS-DLFP		AAS-DLFP		AAS-DLFP		AAS-DLFP		AAS-DLFP	
MIMO Midamble		MIMO Midamble		MIMO Midamble		MIMO Midamble		MIMO Midamble		MIMO Midamble	
MIMO PUSC Zone		MIMO PUSC Zone		MIMO PUSC Zone		MIMO PUSC Zone		MIMO PUSC Zone		MIMO PUSC Zone	
MIMO Midamble										MIMO Midamble	
MIMO FUSC Zone										MIMO FUSC Zone	

Frame-start DL Preamble is defined in page 552, 802.16-2004 and in page 513, 802.16-2005

AAS Preamble is defined in 802.16e-2005 page 367

MIMO Midamble is defined in 802.16e-2005 page 599

MS Operational Effectiveness in Presence of RS

Effectiveness to BS		RS Category			
		IB-NP	IB-SP-S-I	IB-SP-S-D	OB/IB-AP /IB-SP-D
BS cell search & BS frame boundary detection @ MS		Same	Conditional* ²	Conditional* ³	Same
BS cell ID & BS segment identification @ MS		Same	Same	Same	Same
DL frequency/timing offset compensation @ MS		Same	Conditional* ²	Conditional* ³	Same
DL channel estimation @ MS	Only by pilots in its burst	Same	Same	Same	Same
	Also by preamble and/or pilots in other bursts	Possibly Negative* ¹	Possibly Negative* ⁴	Possibly Negative* ⁴	Same
Channel quality measurement @MS (CINR accuracy of BS preamble)		Same	Possibly Negative* ²	Conditional* ³	Same

Same: No change w.r.t. MS operational effectiveness

Conditional: Could be positive, same or negative depending on the operating environment, e.g., whether it is in range extension model or throughput enhancement model, whether the RS signal received by the MS is much stronger than the BS signal, whether the RNG-RSP (ranging response) message can be used effectively, etc

***1:** depend on sources of bursts included in the channel estimation algorithm

***2:** MS may receive multi-path interference signals from BS & RS

***3:** MS may receive co-channel interference signals from BS & RS

***4:** due to channel estimation algorithm

MS Operational Effectiveness in Presence of RS

Effectiveness to RS		RS Category			
		IB-NP	IB-SP-S-I	IB-SP-S-D	OB/IB-AP /IB-SP-D
RS cell search & RS frame boundary detection @ MS		N/A	Conditional* ²	Conditional* ³	Same
RS cell ID & RS segment identification @ MS		N/A	N/A	Same	Same
DL frequency/timing offset compensation @ MS		Conditional* ¹	Conditional* ²	Conditional* ³	Same
DL channel estimation @ MS	Only by pilots in its burst	Same	Same	Same	Same
	Also by preamble and/or pilots in other bursts	Possibly Negative* ⁴	Possibly Negative* ⁴	Possibly Negative* ⁴	Same
Channel quality measurement @MS (CINR accuracy of BS preamble)		N/A	Possibly Negative* ²	Conditional* ³	Same

Same: No change w.r.t. MS operational effectiveness

Conditional: Could be positive, same or negative depending on the operating environment, e.g., whether it is in range extension model or throughput enhancement model, whether the RS signal received by the MS is much stronger than the BS signal, whether the RNG-RSP (ranging response) message can be used effectively, etc

***1: time synchronization problem between BS & RS, Doppler shift**

***2: MS may receive multi-path interference signals from BS & RS**

***3: MS may receive co-channel interference signals from BS & RS**

***4: due to channel estimation algorithm**