

---

# **802.3bp Baseline Optional Link segment**

**Chris DiMinico**  
**MC Communications/Panduit**  
**[cdiminico@ieee.org](mailto:cdiminico@ieee.org)**


**802.3bp (RTPGE)**

# Purpose

---

- Baseline for the 802.3bp optional Link Segment (ScTP/Shielded)
- Fill-in optional link segment TBD's in 802.3bp D0.30 Clause 98.

# 802.3bp Link Segment (optional)

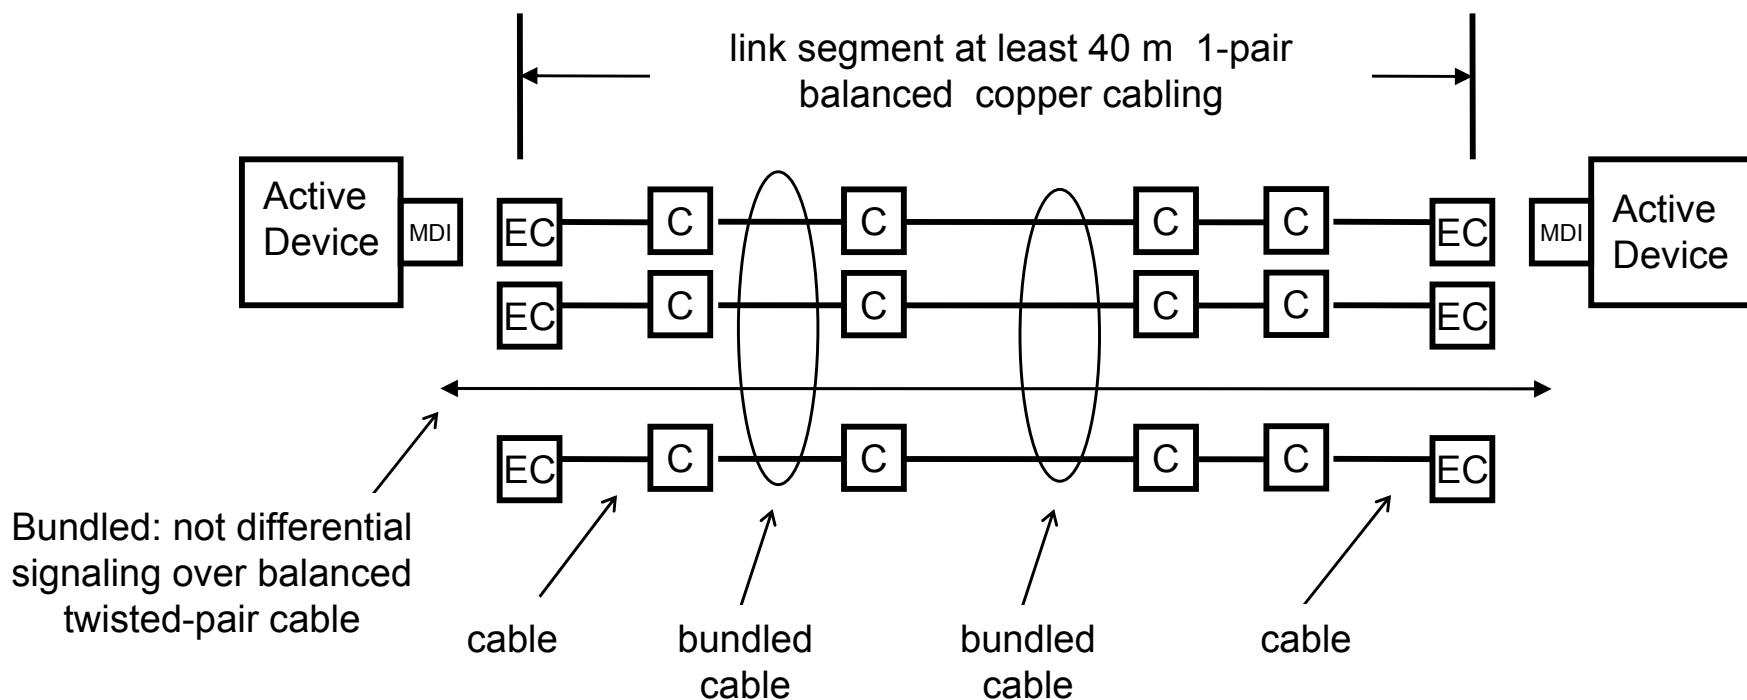

The IEEE 802.3 nomenclature is bracketed to identify relationship to the IEEE 802.3 definitions.

Length objective [EC] to [EC] at least 40 m  
Number of inline connectors [C] = 4

- [C] = inline connector
- [EC] = connection to equipment
- [MDI] = Active electronics connector  
[Medium dependent interface (MDI)]

# 10GBASE-T Link Segments IL

## 98.4.4.2.1 Insertion loss

The insertion loss of each type B link segment shall meet the values determined using Equation (98-4).

$$\text{InsertionLoss}(f) \leq \text{TBD} \text{ dB} \quad (98-4)$$

where

$f$  is the frequency in MHz;  $1 \leq f \leq 600$

This function `InsertionLoss(f)` accounts for the insertion loss of the balanced cabling pair and four inline connectors within each link segment.

# Link segment transmission parameters (ScTP/Shielded)

Link segment transmission and coupling parameters (ScTP/Shielded)


- Insertion loss - 22 AWG solid copper at 70 degrees C (0.2% deg C)
- Return loss (UTP proposal)
- Alien Crosstalk
  - PSANEXT (Category 8), PSAACRF (Category 8)
- Coupling attenuation - ANSI/TIA-1005-A-2012 Telecommunications Infrastructure Standard for Industrial Premises. Electromagnetic environmental classifications specified in ANSI/TIA-568-C.0.
- Insertion loss

$$InsertionLoss(f) \leq \left| 0.7131\sqrt{f} + 0.0048 \cdot f + \frac{0.1320}{\sqrt{f}} \right| + 0.08\sqrt{f} + 0.018\sqrt{f}$$

*20.14 dB @500 MHz      40 meters cable      four connectors      ILD*

# 10GBASE-T1 Link Segments IL

## RTPGE Link Segments IL

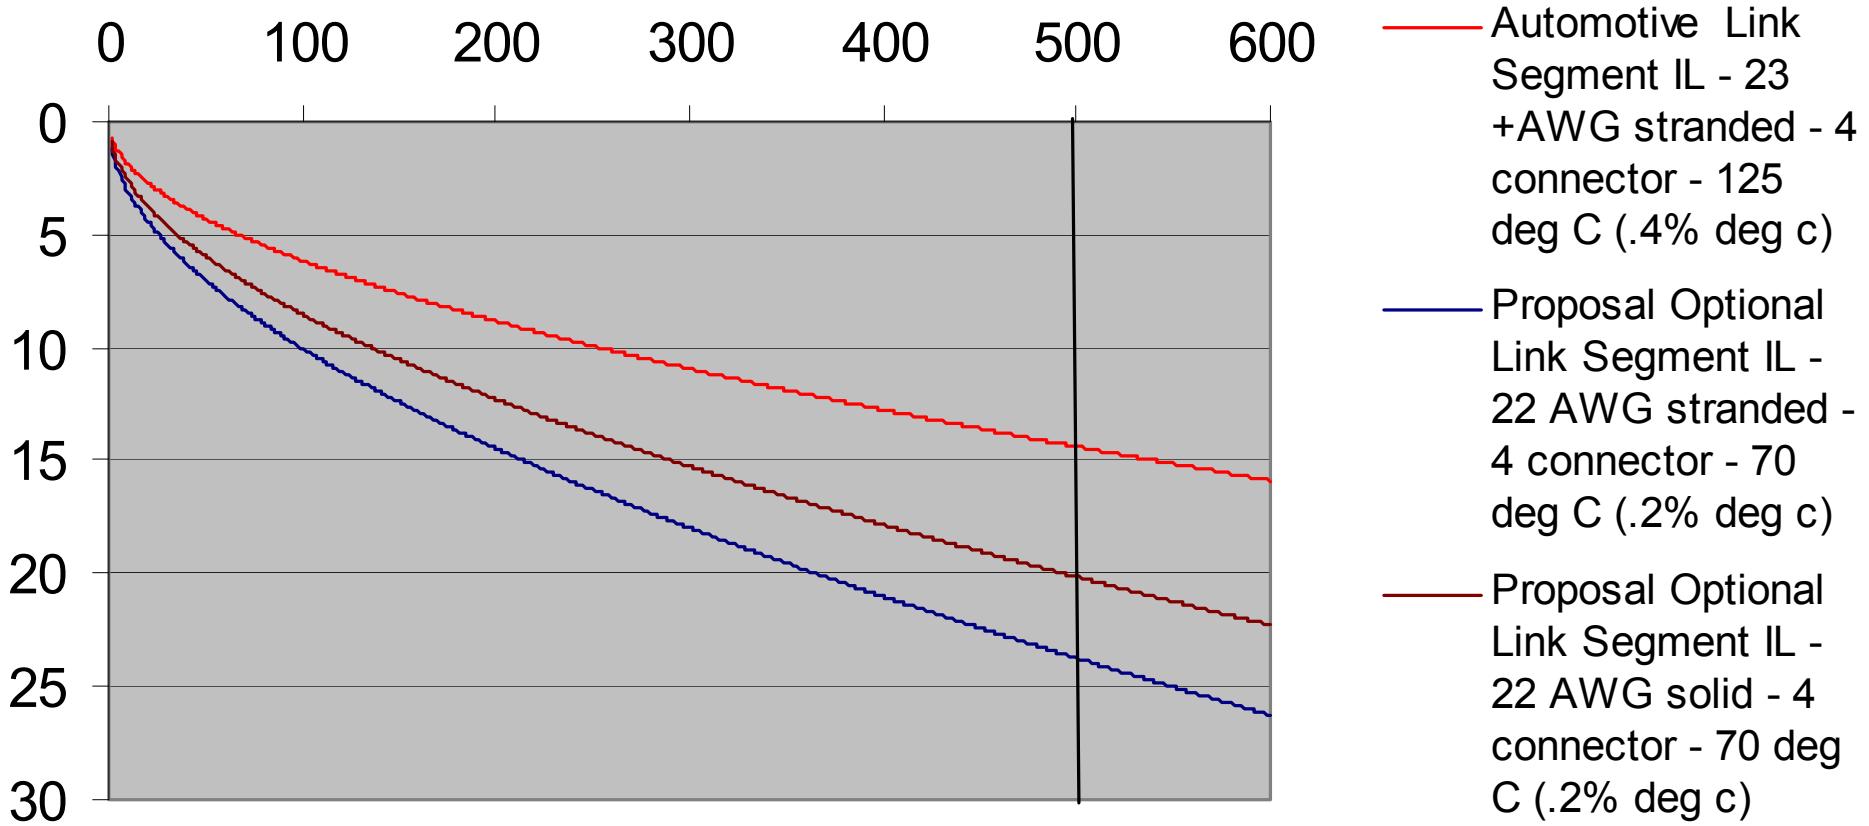

802.3bp (RTPGE)

# 10GBASE-T Link Segment RL

## 98.4.4.2.3 Return loss


In order to limit the noise at the receiver due to impedance mismatches each type B link segment shall meet the values determined using Equation (98-5) at all frequencies from 1 MHz to 600 MHz. The reference impedance for the return loss specification is  $100 \Omega$ .

$$\text{ReturnLoss}(f) \leq \text{TBD} \text{ dB} \quad (98-5)$$

where

$f$  is the frequency in MHz.

# Automotive and Optional Link Segment Return Loss

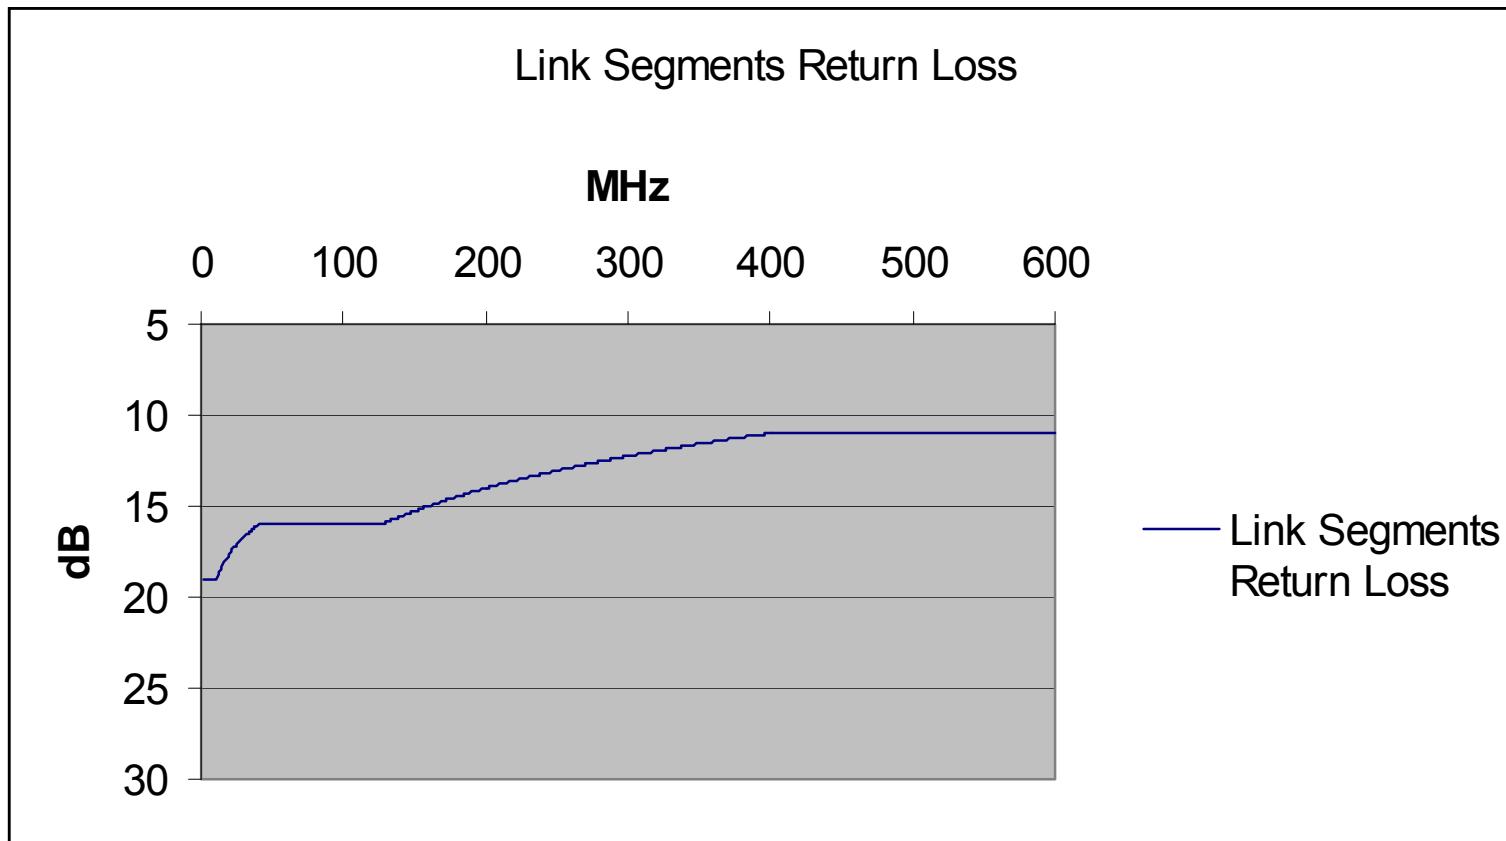

Frequency range	Requirement
1-10 MHz	19 dB
10-40 MHz	$24 - 5\log(f)$ dB
40-130 MHz	16 dB
130-400 MHz	$37 - 10\log(f)$ dB
400-600 MHz	11 dB

802.3bp (RTPGE)

# Alien Crosstalk

## 98.4.4.4.2 Multiple disturber power sum alien near-end crosstalk (PSANEXT) loss

PSANEXT loss is determined by summing the power of the individual pair-to-pair differential alien NEXT loss values over the frequency range 1 MHz to 600 MHz as follows in Equation (98–10).

$$\text{PSANEXT}_N(f) \geq -10\log \sum_{j=1}^m \frac{-\text{AN}(f)_{j,N}}{10} \text{ dB} \quad (98-10)$$

where the function  $\text{AN}(f)_{j,N}$  represents the magnitude (expressed in dB) of the alien NEXT loss at frequency  $f$  of the disturbing type B link segment  $j$  (1 to  $m$ ) for the disturbed type B link segment  $N$ .

The power sum ANEXT loss between a disturbed type B link segment and the disturbing type B link segment shall meet the values determined using Equation (98–11).


$$\text{PSANEXT}(f) \geq \text{TBD dB} \quad (98-11)$$

where

$f$  is the frequency in MHz

# Alien Crosstalk

- Alien crosstalk between shielded cables containing multiple link segments

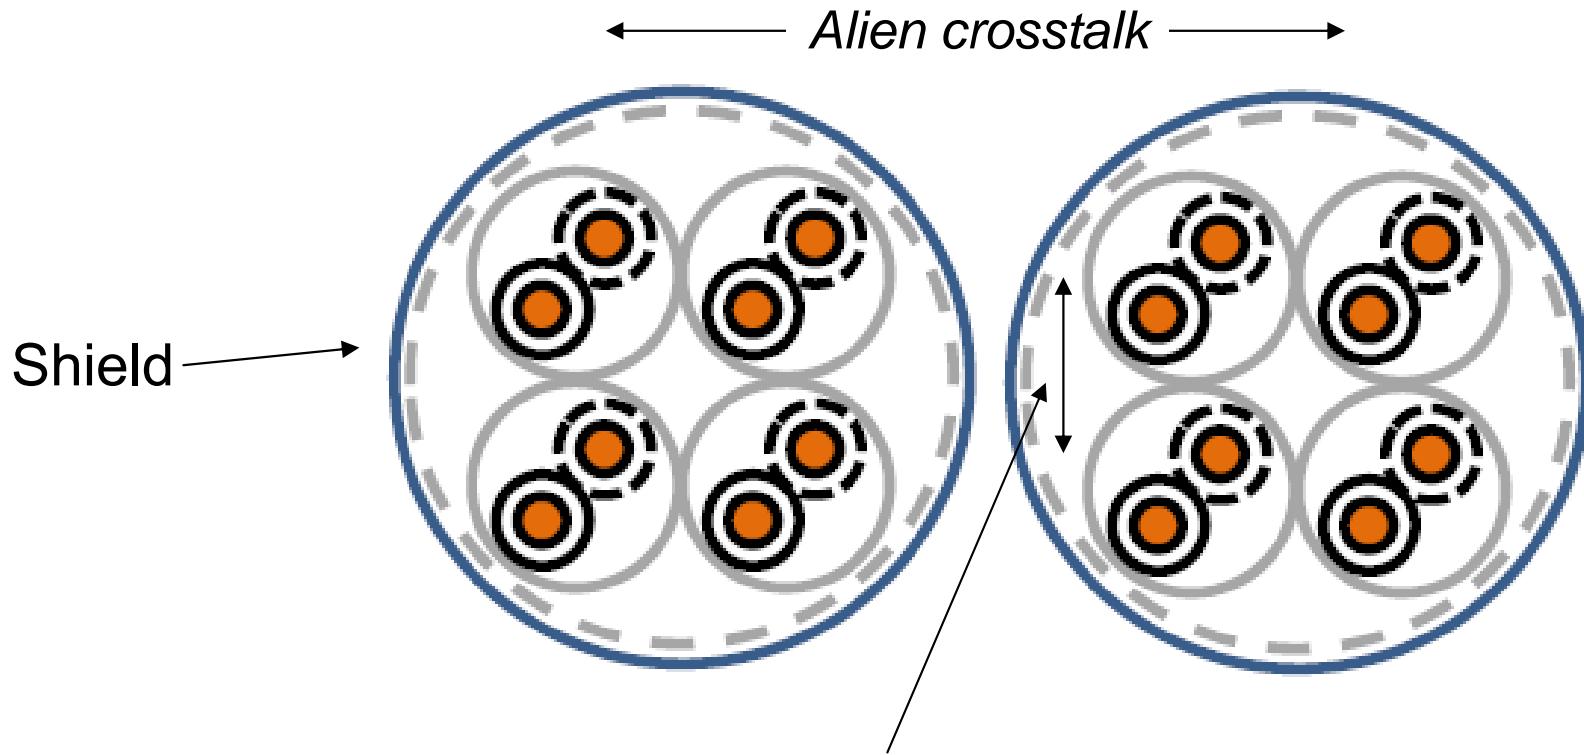

- Alien crosstalk between multiple link segments within shielded cable

802.3bp (RTPGE)

# Alien crosstalk between multiple link segments within shielded cable

- Alien Crosstalk

- PSANEXT

Calculations that result in PSANEXT loss values greater than 75 dB (TBD) shall revert to a requirement of 75 dB minimum (TBD).

Frequency (MHz)	PSANEXT (dB)
$1 \leq f < 100$	$\geq 85 - 10\log(f/100)$
$100 \leq f \leq 600$	$\geq 85 - 15\log(f/100)$

- PSAACRF

Calculations that result in PSAACRF loss values greater than 75 dB (TBD) shall revert to a requirement of 75 dB minimum (TBD). PSAACRF values are for information only when PSANEXT loss is greater than either  $72 - 15\log(f/100)$  dB or 67 dB (TBD).

Frequency (MHz)	PSAACRF (dB)
$1 \leq f \leq 600$	$\geq 61 - 20\log(f/100)$

# Alien crosstalk between shielded cables containing multiple link segments

- Use same as automotive link segment with cable PSAACRF scaled to 40 m

PSAACRF

$$\text{PSAACRF} := -20 \cdot \log_{10} \left( \frac{-10 \cdot \log\left(\frac{40}{100}\right) + 38.2 - 20 \cdot \log\left(\frac{f}{100}\right)}{-20} + 4 \cdot 10^{\frac{67 - 20 \cdot \log\left(\frac{f}{100}\right)}{-20}} \right)$$

where

f := frequency\_in\_MHz

PSANEXT

$$54 - 10 \log\left(\frac{f}{100}\right) \quad [1 \text{ to } 100 \text{ MHz}]$$

$$54 - 15 \log\left(\frac{f}{100}\right) - 6 * \left(\frac{f-100}{400}\right) \quad [100 \text{ to } 600 \text{ MHz}]$$

# Link segment transmission parameters (ScTP/Shielded)

- Coupling attenuation - Consistent with Category 6A specified in ANSI/TIA-1005-A-2012 Telecommunications Infrastructure Standard for Industrial Premises. The coupling attenuation requirements (E1, E2, E3) depend on the electromagnetic environmental classifications specified in ANSI/TIA-568-C.0.
- Coupling attenuation

Frequency (MHz)	Minimum (dB)		
	E1	E2	E3
$30 \leq f \leq 600$	80-20Log(f) (Max 60 dB)	90-20Log(f) (Max 60 dB)	100-20Log(f) (Max 60 dB)

- Environmental classification

Electromagnetic	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>
Radiated RF - AM	3 V/m at (80 to 1 000 MHz) 3 V/m at (1 400 to 2 000 MHz) 1 V/m at (2 000 to 2 700 MHz)	3 V/m at (80 to 1 000 MHz) 3 V/m at (1 400 to 2 000 MHz) 1 V/m at (2 000 to 2 700 MHz)	10 V/m at (80 to 1 000 MHz) 3 V/m at (1 400 to 2 000 MHz) 1 V/m at (2 000 to 2 700 MHz)
Conducted RF	3 V at 150 kHz to 80 MHz	3 V at 150 kHz to 80 MHz	3 V at 150 kHz to 80 MHz

# Backup

802.3bp (RTPGE)

# Link segment transmission parameters (ScTP/Shielded)

## Link segment transmission and coupling parameters (ScTP/Shielded)

- Insertion loss - 22 AWG stranded copper at 70 degrees C (0.2% deg C)
- Return loss (UTP proposal)
- Alien Crosstalk
  - PSANEXT (Category 8), PSAACRF (Category 8)
- Coupling attenuation - ANSI/TIA-1005-A-2012 Telecommunications Infrastructure Standard for Industrial Premises. Electromagnetic environmental classifications specified in ANSI/TIA-568-C.0.
- Insertion loss

$$InsertionLoss(f) \leq \left| 0.8558\sqrt{f} + 0.0048 \cdot f + \frac{0.1320}{\sqrt{f}} \right| + 0.08\sqrt{f} + 0.018\sqrt{f}$$

23.73 dB @500 MHz      40 meters cable      four connectors      ILD

802.3bp (RTPGE)

# Link segment transmission parameters (UTP)

## Link segment transmission and coupling parameters (UTP)

- Insertion loss
- Return loss
- Alien Crosstalk
  - PSANEXT, PSAACRF
- Common to differential conversion loss (SDC12/SDC21)

### • Insertion loss

- Amended Motion #2 - Move that The IEEE P802.3bp Task Force affirms the proposed
- Baseline IL Channel Performance for link segment insertion to establish the absolute
- value across the frequency range through 600MHz. (herman\_3bp\_01\_0913.pdf)
- Technical 75%
- Vote
- Y: 25 N: 0 A: 4
- MOTION: Passes

$$IL = .4927\sqrt{f} + 0.0023f + (0.0639 / \sqrt{f}) + 0.08\sqrt{f} + 0.018\sqrt{f}$$

where

f := frequency\_in\_MHz

# Link segment transmission parameters (UTP)

## •Alien Crosstalk -PSANEXT

Motion 4: Move that 802.3bp adopt the “Proposed baseline” Alien NEXT specification on slide 8 of mueller\_01a\_3bp\_0314.pdf

M: Thomas Müller S: Chris Mash

Y: 29 N:0 A: 9

### Existing baseline

$$60 - 10 \log\left(\frac{f}{100}\right) \quad [1 \text{ to } 100 \text{ MHz}]$$

$$60 - 15 \log\left(\frac{f}{100}\right) - 6 * \left(\frac{f-100}{400}\right) \quad [100 \text{ to } 600 \text{ MHz}]$$

### Proposed baseline

$$54 - 10 \log\left(\frac{f}{100}\right) \quad [1 \text{ to } 100 \text{ MHz}]$$

$$54 - 15 \log\left(\frac{f}{100}\right) - 6 * \left(\frac{f-100}{400}\right) \quad [100 \text{ to } 600 \text{ MHz}]$$

# Link segment transmission parameters (UTP)

## •Alien Crosstalk -PSAACRF

Motion #8 - Move that The IEEE P802.3bp Task Force affirms the proposed Baseline PSANEXT (in slide 11 in herman\_3bp\_01\_0913.pdf ) and PSAACRF (in slide 13 in herman\_3bp\_01\_0913.pdf) for link segment specification over frequency range 1MHz - 600MHz. (alien crosstalk configuration in

[http://www.ieee802.org/3/bp/public/jul13/moffitt\\_3bp\\_01\\_0713.pdf](http://www.ieee802.org/3/bp/public/jul13/moffitt_3bp_01_0713.pdf))

M: Todd Herman S: Xiaofeng Wang

Technical 75%

Vote

Y: 18 N: 1 A: 10

MOTION: Passes

PSAACRF

$$\text{PSAACRF} := -20 \cdot \log_{10} \left( \frac{\frac{-10 \cdot \log\left(\frac{15}{100}\right) + 38.2 - 20 \cdot \log\left(\frac{f}{100}\right)}{-20} + 4 \cdot 10}{\frac{67 - 20 \cdot \log\left(\frac{f}{100}\right)}{-20}} \right)$$

where

$f := \text{frequency\_in\_MHz}$

# Link segment transmission parameters (UTP)

- Return Loss

Frequency range	Requirement
1-10 MHz	19 dB
10-40 MHz	$24 - 5\log(f)$ dB
40-130 MHz	16 dB
130-400 MHz	$37 - 10\log(f)$ dB
400-600 MHz	11 dB

Motion #2: Move that the IEEE P802.3bp Task Force affirms that proposed RL specifications for the automotive link segment in herman\_3bp\_01\_1113.pdf for inclusion in the 802.3bp baseline specification.

Moved by: Xiaofeng Wang

Seconded by: Mehmet Tazebay

Technical 75%

# Link segment transmission parameters (UTP)

- Mode conversion

Frequency, MHz	
-50 dB	$10 < f_{\text{MHz}} < 80$
$[5 \log_{10}(f_{\text{MHz}}) - 72]_{\text{dB}}$	$80 < f_{\text{MHz}} < 600$

Motion #3: Move that The IEEE P802.3bp Task Force affirms the proposed Mode Conversion limit line for the automotive link segment in Slide # 13 of tazebay\_3bp\_01a\_0913.pdf for inclusion in 802.3bp baseline specification.

Moved by: Mehmet Tazebay

Seconded by: Gary Yurko

Technical 75%

Y: 33 N: 0 A: 5

MOTION: Passes