

## RTPGE

# Return Loss Proposal for 1-Pair Ethernet

CommScope

October 23, 2013

Channel Ad Hoc Meeting

Wayne Larsen

Richard Mei

Bryan Moffitt


Todd Herman

Frequency range	Requirement
1-10 MHz	19 dB
10-40 MHz	$24-5\log(f)$ dB
40-130 MHz	16 dB
130-400 MHz	$37-10\log(f)$ dB
400-600 MHz	11 dB

- A cascaded S-parameter model was constructed based on a 5 m channel constructed with four connectors, each cable segment being 1 m.
- This was selected as a reasonable worst case model based on synthesized cable and connectors.
- Return loss measurements were made on a physical channel.
- The return loss of this channel model was graphed along with the measured data.
- Additionally, another model was made of a 4-connector channel per Buntz, topology 0.2-0.2-2-0.2-0.2.
- This model was also plotted against the proposed specification.


# 5m Channel Results

return loss model and measurements 5 m channel 1-1-1-1

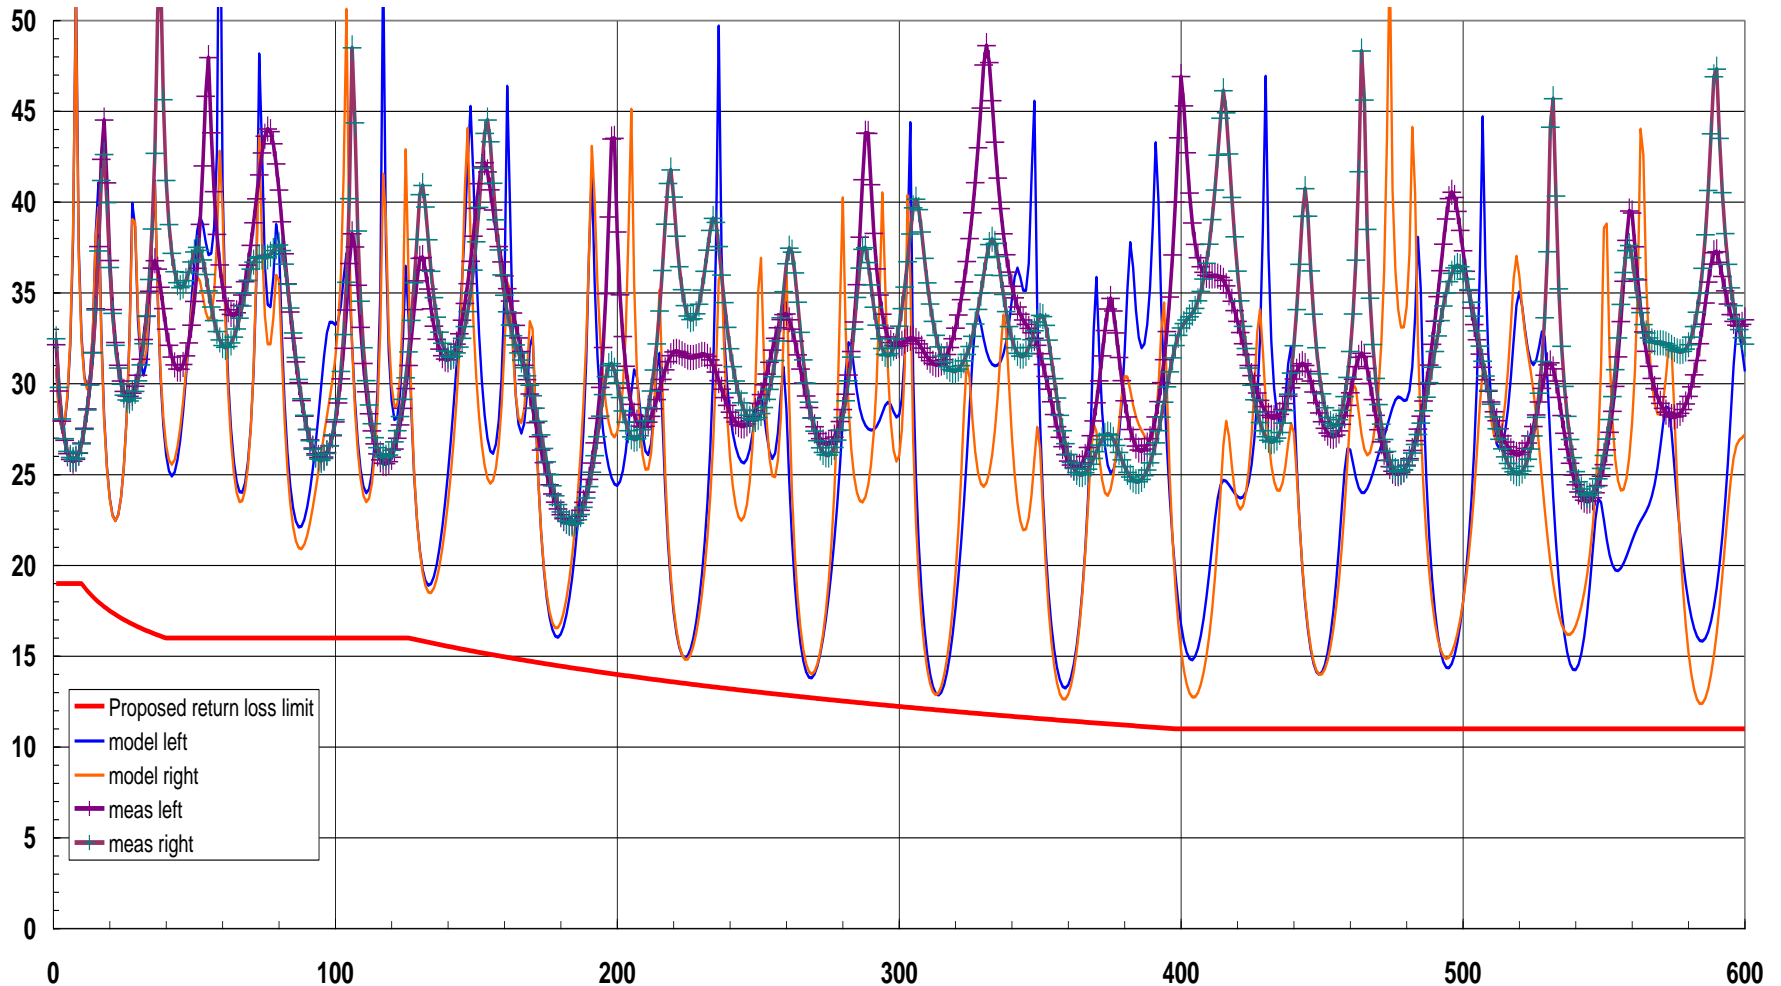


# 2.8m Channel Modeling Results

return loss model and measurements Butntz channel 0.2-0.2-2-0.2-0.2 34-20log(f/100), 24 min connector

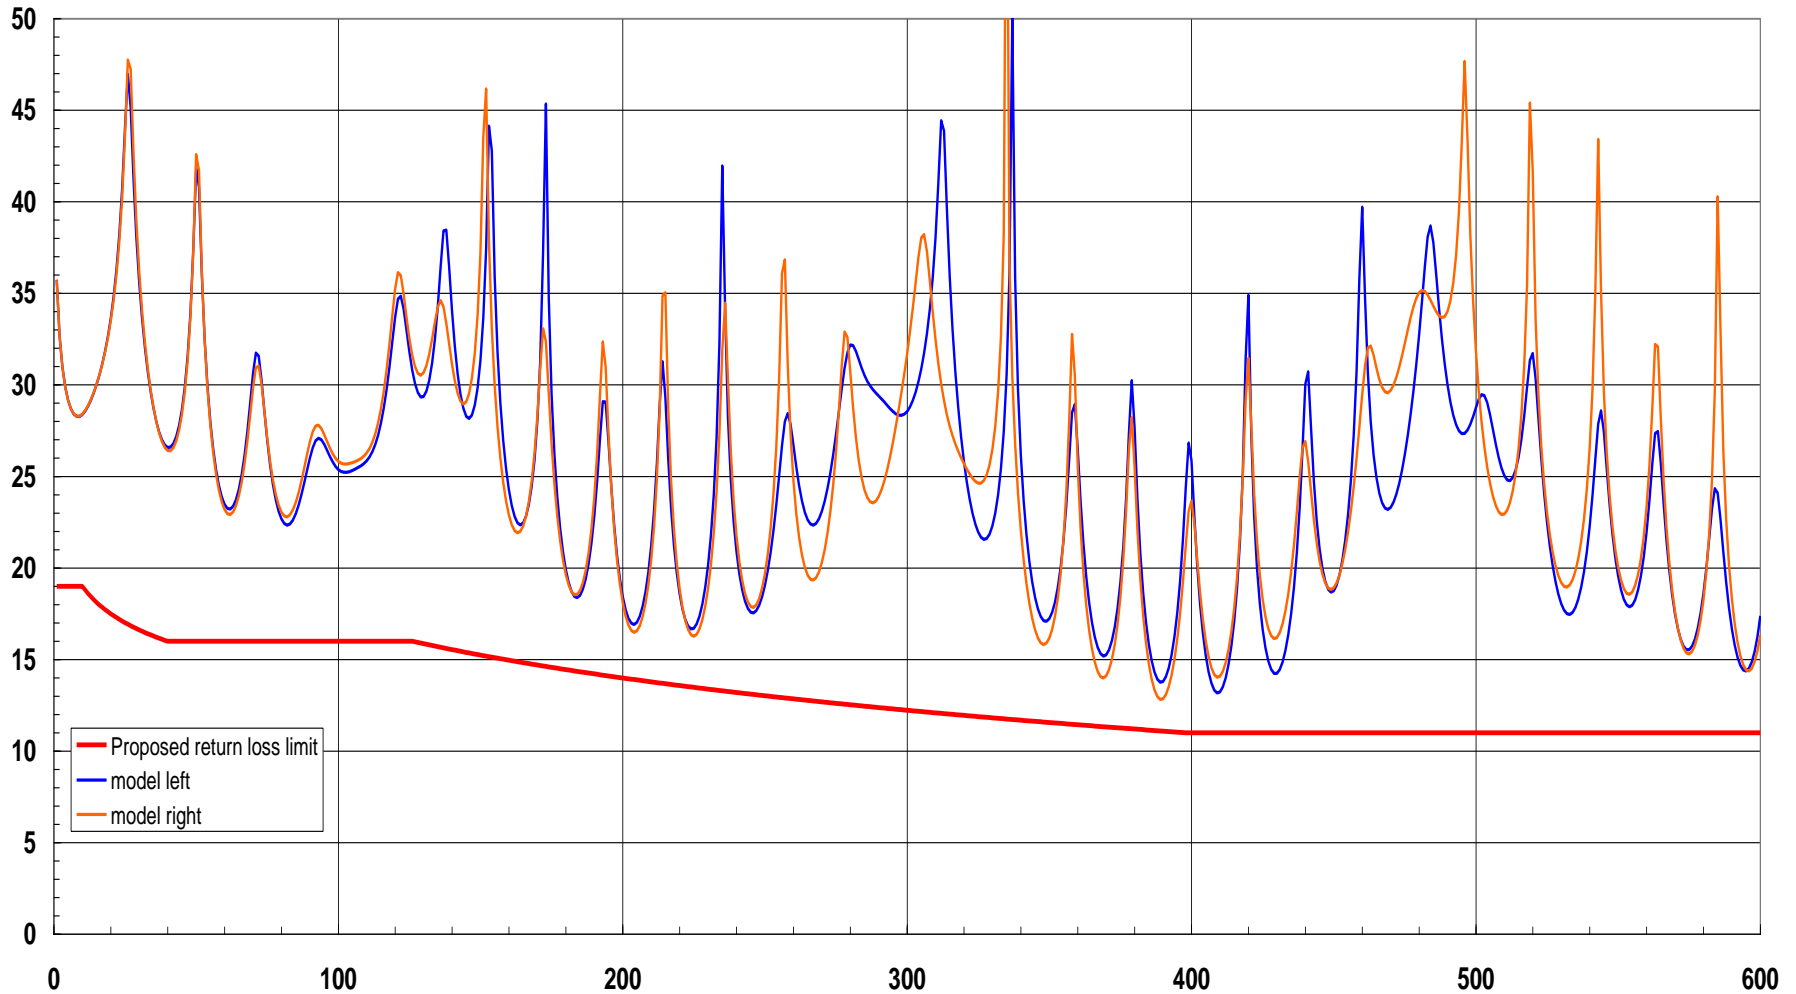

# Cat6A Return Loss Reference

## Proposed RL Limits vs. Cat6A

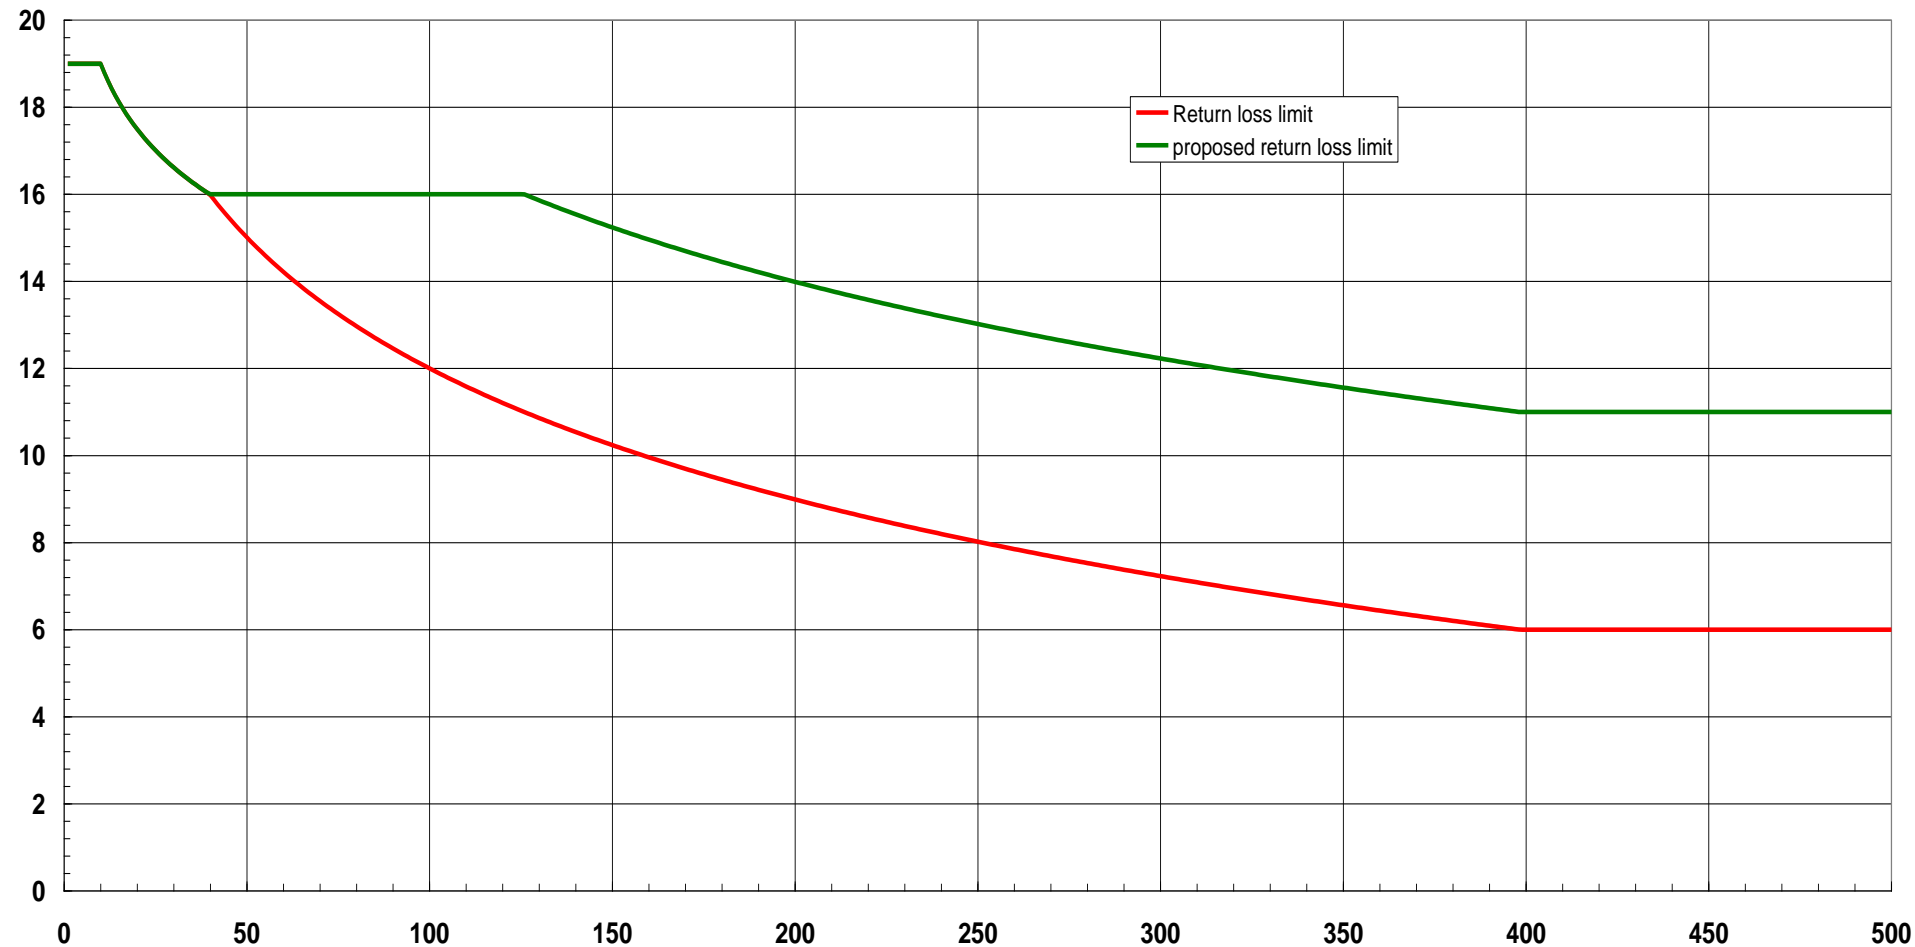

- The limit proposed limits are based on the channel topologies provided.
  - Supported by theoretical modeling.
    - 1-1-1-1-1 channel topology
    - 0.2-0.2-2-0.2-0.2 channel topology
  - Supported by measurements.
    - 1-1-1-1-1 channel topology
- The concerns voiced in the York Interm Meeting have been reviewed and accounted for with the short channel configurations.
- The specification should be tighter than Cat6A for the RTPGE cable and connector construction.
- The proposed Return Loss specification should be adapted for baseline proposal.

Thank You

COMMSCOPE®