

Enhancements to Gigabit Ethernet Link Budget Spreadsheet

Piers Dawe

Agilent Technologies

Fiber Optic Communications Division

White House Road

Ipswich, England IP1 5PB

+ 44 (0)1473 465654

piers_dawe@agilent.com



Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000

Motivation

- Striving for accuracy and correctness
 - New fibre types
 - Tough decisions at 10G: can't over- or under-engineer

- Extending GbE spreadsheet to cover scrambled as well as block codes

Side Benefit

- More consistent treatment of interactions between power penalties



Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 2

New features

- New boxes for baseline wander (BLW)
- Attenuation output at wavelength
- New "Pcross" column
- "Back-to-back" row in spreadsheet
- Graphing of penalties
- Marker to show target length, readout of margin at target
- New pages for new high bandwidth MMF, and 1550 nm on SMF



Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 3

What's not changed

- The methodology
- The layout and symbols
- Nearly all equations
- The results - hardly (at 1.25 GBd)



Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 4

Issues outstanding

- Needs more experimental verification
- Attenuation formula at 1550 nm not very accurate (but you see what you are using)

Issues not covered or not changed

- Duty Cycle Distortion (DCD)
- Mode partition noise
- Optical Modulation Amplitude specification
- Jitter
- Multilevel coding
- Chirp



Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 5

Methodology 1

As before,

min. transmitted power - max. receiver
sensitivity = power budget

budget - (worst losses & impairments)
= margin

Spreadsheet is a tool to aid specification of link
length and optical interfaces facing the link,
not primarily for transceiver design




Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 6

Baseline Wander (BLW)

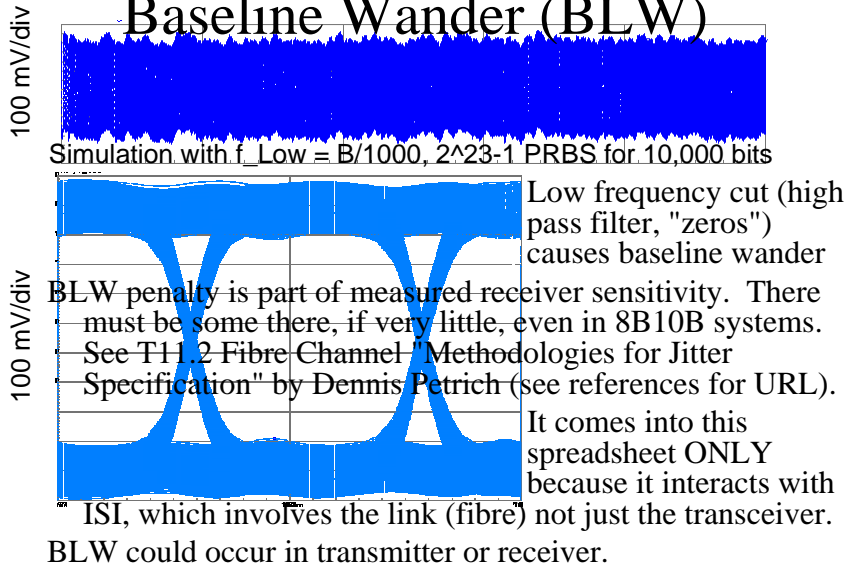

Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 7

Interacting Impairments

GbE spreadsheet has eight losses and impairments (penalties).
Of these, I believe five or six interact (within the methodology of the spreadsheet)

	ISI	TP4	RIN	MPN	BLW	MN
ISI		No?	Already Yes included	? *	Yes	? #
TP4			No?	? *	?	? #
RIN				Yes	Yes	? #
MPN					Yes	? #
BLW						? #

* Petar Pepeljugin and Dave Dolfi looking at this

any interaction not addressed here

Analogy (if it helps): a sparse matrix with diagonal terms present and few off-diagonal terms



Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 8

Methodology 2 (Going deeper...)

1. Calculate BLW penalty in absence of ISI but with TP4 eye closure. This effect is already included in the receiver sensitivity, hence in the power budget. Fill entries in spreadsheet header.
2. Work out each loss and impairment separately, for each length, fill entries in spreadsheet table.
3. Work out total impairment of interacting things, subtract relevant separate impairments including any (BLW) hidden in the receiver. Result goes in box "Pcross".
4. Add across table to get total penalties.
5. Graph out each penalty and total penalties against length, record margin at target reach.



Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 9

BLW Equations

For scrambled binary (PAM-2) codes, BLW is gaussian and can be treated as noise:

$$\sigma_{BLW} = \sqrt{\pi \cdot f_{Low} / B}$$

where

B = line rate = Baud rate,


f_{Low} = high pass filter frequency if single zero,

σ_{BLW} = (one standard deviation of BLW)
(half eye height before ISI)

So it's like a signal-to-noise ratio.

(Extreme case) if $\sigma_{BLW} > 1/Q_{min} = 1/7.04$
= 0.142, penalty for BER = 10⁻¹² is infinite.

For $\sigma_{BLW} = 0.025$ (i.e. 1.25% of whole eye),
f_{Low}/B = 0.0002 (for B = 10Gbit/s that's 2 MHz)

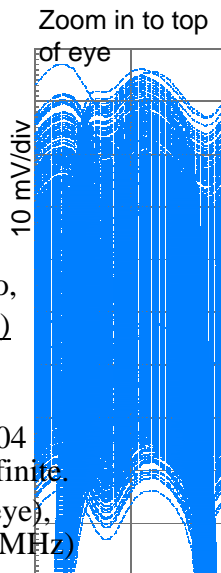

Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 10

Equations continued

σ_{BLW} does NOT decrease in line with the eye in the face of ISI (while RIN does) - but the eye closes anyway.

Hence penalty

$$P_{BLW} = -5 \log_{10} [1 - (Q_{min} * \sigma_{BLW} / H_{ISI})^2] \text{ dB}$$

where H_{ISI} is the ratio of the eye height after and before ISI

e.g. for $\sigma_{BLW} = 0.025$, no ISI, $P_{BLW} = 0.07$ dB

for $\sigma_{BLW} = 0.025$, 3 dB ISI, $P_{BLW} = 0.29$ dB

Compare this with the RIN penalty,

$$P_{RIN} = -5 \log_{10} [1 - (Q_{min} * \sigma_{RIN})^2] \text{ dB}$$

And mode partition noise penalty,

$$P_{MPN} = -5 \log_{10} [1 - (Q_{min} * \sigma_{MPN})^2] \text{ dB}$$



Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 11

Combined penalty 1

$$P = -5 \log_{10} [1 - \{ (Q_{min} * \sigma_{BLW} / H_{ISI})^2 + (Q_{min} * \sigma_{RIN})^2 + (Q_{min} * \sigma_{MPN})^2 \}] \text{ dB}$$

which is not quite the same as

$$P_{BLW} + P_{RIN} + P_{MPN} .$$

The difference is tiny in most healthy systems.

Eye closure caused by TP4 timing error/uncertainty is treated like bandwidth-induced ISI - actual equations are in the spreadsheet.




Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 12

Combined penalty 2

How bad ISI exacerbates BLW penalty (or vice versa, or RIN and MPN penalties, or...)

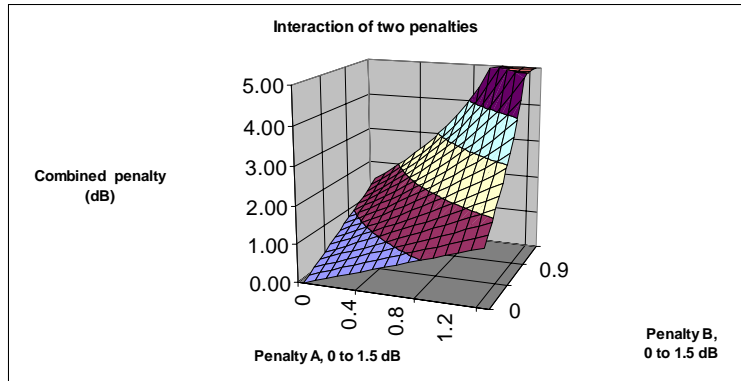


Enhancements to Gigabit Ethernet Link Budget Spreadsheet

IEEE 802.3ae Albuquerque 6-10 March 2000 slide 13

Example 1

This is the greatest effect to any sheet of the current Gigabit Ethernet spreadsheet (1250 Mbit/s)

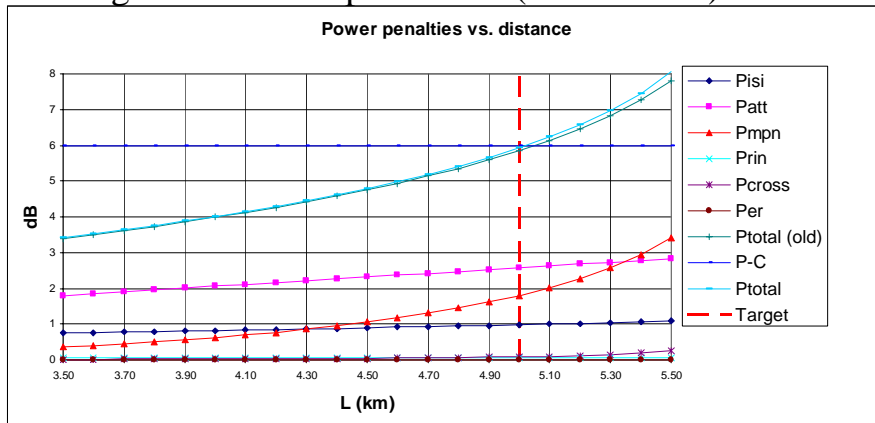

Difference is 0.08 dB at worst case.




Enhancements to Gigabit Ethernet Link Budget Spreadsheet

IEEE 802.3ae Albuquerque 6-10 March 2000 slide 14

Example 2 (fictitious)

Almost no ISI, three equal terms (RIN, MPN, BLW) ~0.75 dB at 2 km that are tied to signal strength.

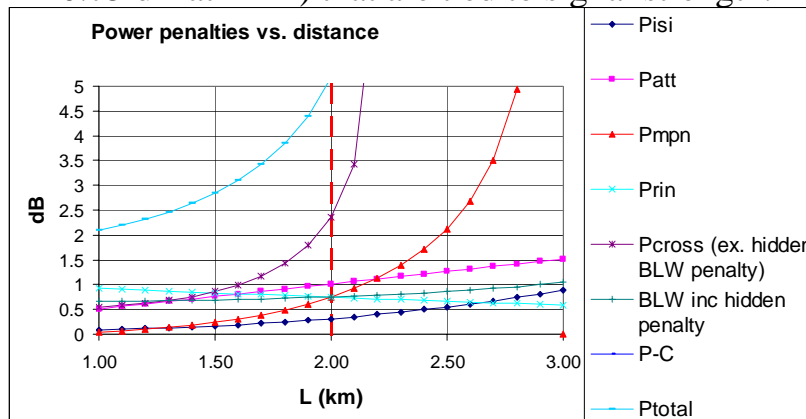

Interaction of noise terms costs an extra ~2 dB at 2km



Agilent Technologies
Innovating the HP Way

Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 15

More detail on Baseline Wander

We think that if there are multiple low-pass filters:

In the non-limited case (small signal theory), the appropriate f_{Low} is roughly the -3dB point that you measure

If there is BLW before and after a clipping (limiting) function, much of the BLW from before may be clipped out *** Warning; we haven't proved this statement, either by simulation or experiment.

Spreadsheet not designed as a transceiver design tool, but if you have a receiver and consider changing the BLW (by changing a coupling capacitor, say), if you change box E9 (Budget) from e.g. "8" to "=8-T11" (T11 being P_BLW) I think you will see the effect explicitly.



Agilent Technologies
Innovating the HP Way


Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 16

Baseline Wander and line code

Graph shows power penalty for LF cut:

8B10B case, data from Petrich, Fibre Channel document
Scrambled case, calculated using formulae shown

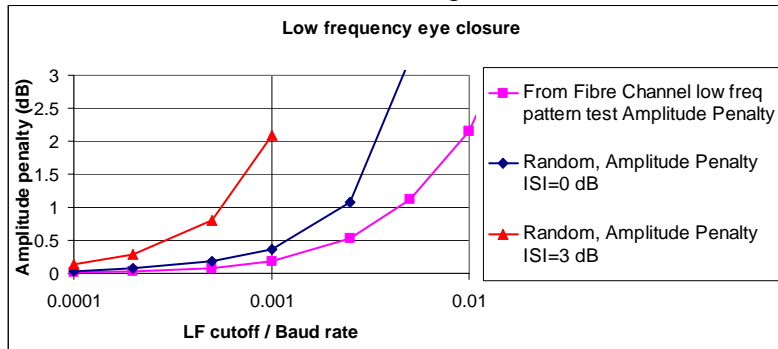

Apparently, need 2x lower LF cut in scrambled to get same penalty as for 8B10B, if no ISI, 10x with 3 dB ISI



Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 17

Conclusions

- Modified spreadsheet does more, no harder to use
- Needs experimental verification
- Baseline Wander is a manageable item
- Keep LF cut low or your stressed eye will suffer!
- Be wary of any signal-borne noise



Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 18

Acknowledgements

- Russ Patterson for identifying and quantifying the interaction
- Rick Walker, Charles Moore for the mathematics of baseline wander
- Del Hanson, David Cunningham for a great start point
- Dave Dolfi, Mike Dudek, Petar Pepeljugoski for valuable discussions



Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 19

References

(http: unless indicated)

Hanson and Cunningham,

[//grouper.ieee.org/groups/802/3/10G_study/public/email_attach/All_1250.xls](http://grouper.ieee.org/groups/802/3/10G_study/public/email_attach/All_1250.xls)

Petrich, "Methodologies for Jitter Specification" Rev 10.0,

[ftp://ftp.t11.org/t11/pub/fc/jitter_meth/99-151v2.pdf](http://ftp.t11.org/t11/pub/fc/jitter_meth/99-151v2.pdf)

Hanson, Cunningham, Dawe,

[//grouper.ieee.org/groups/802/3/10G_study/public/email_attach/All_1250v2.xls](http://grouper.ieee.org/groups/802/3/10G_study/public/email_attach/All_1250v2.xls)

Cunningham and Lane, "Gigabit Ethernet Networking", Macmillan Technical Publishing,
ISBN 1-57870-062-0

[//grouper.ieee.org/groups/802/3/10G_study/public/march00/pepeljugoski_1_0300.pdf](http://grouper.ieee.org/groups/802/3/10G_study/public/march00/pepeljugoski_1_0300.pdf) ?

This presentation is

[//grouper.ieee.org/groups/802/3/10G_study/public/march00/dawe_1_0300.pdf](http://grouper.ieee.org/groups/802/3/10G_study/public/march00/dawe_1_0300.pdf)

More references listed at

[//grouper.ieee.org/groups/802/3/10G_study/email/msg01127.html](http://grouper.ieee.org/groups/802/3/10G_study/email/msg01127.html)



Enhancements to Gigabit Ethernet Link
Budget Spreadsheet

IEEE 802.3ae Albuquerque
6-10 March 2000 slide 20