


33.2.3.5 State diagrams

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55

Note:
1) pse_reset and power_on are to be replaced by a single variable
2) mr_pse_enable and mr_pse_force_power are to be a single enumerated variable

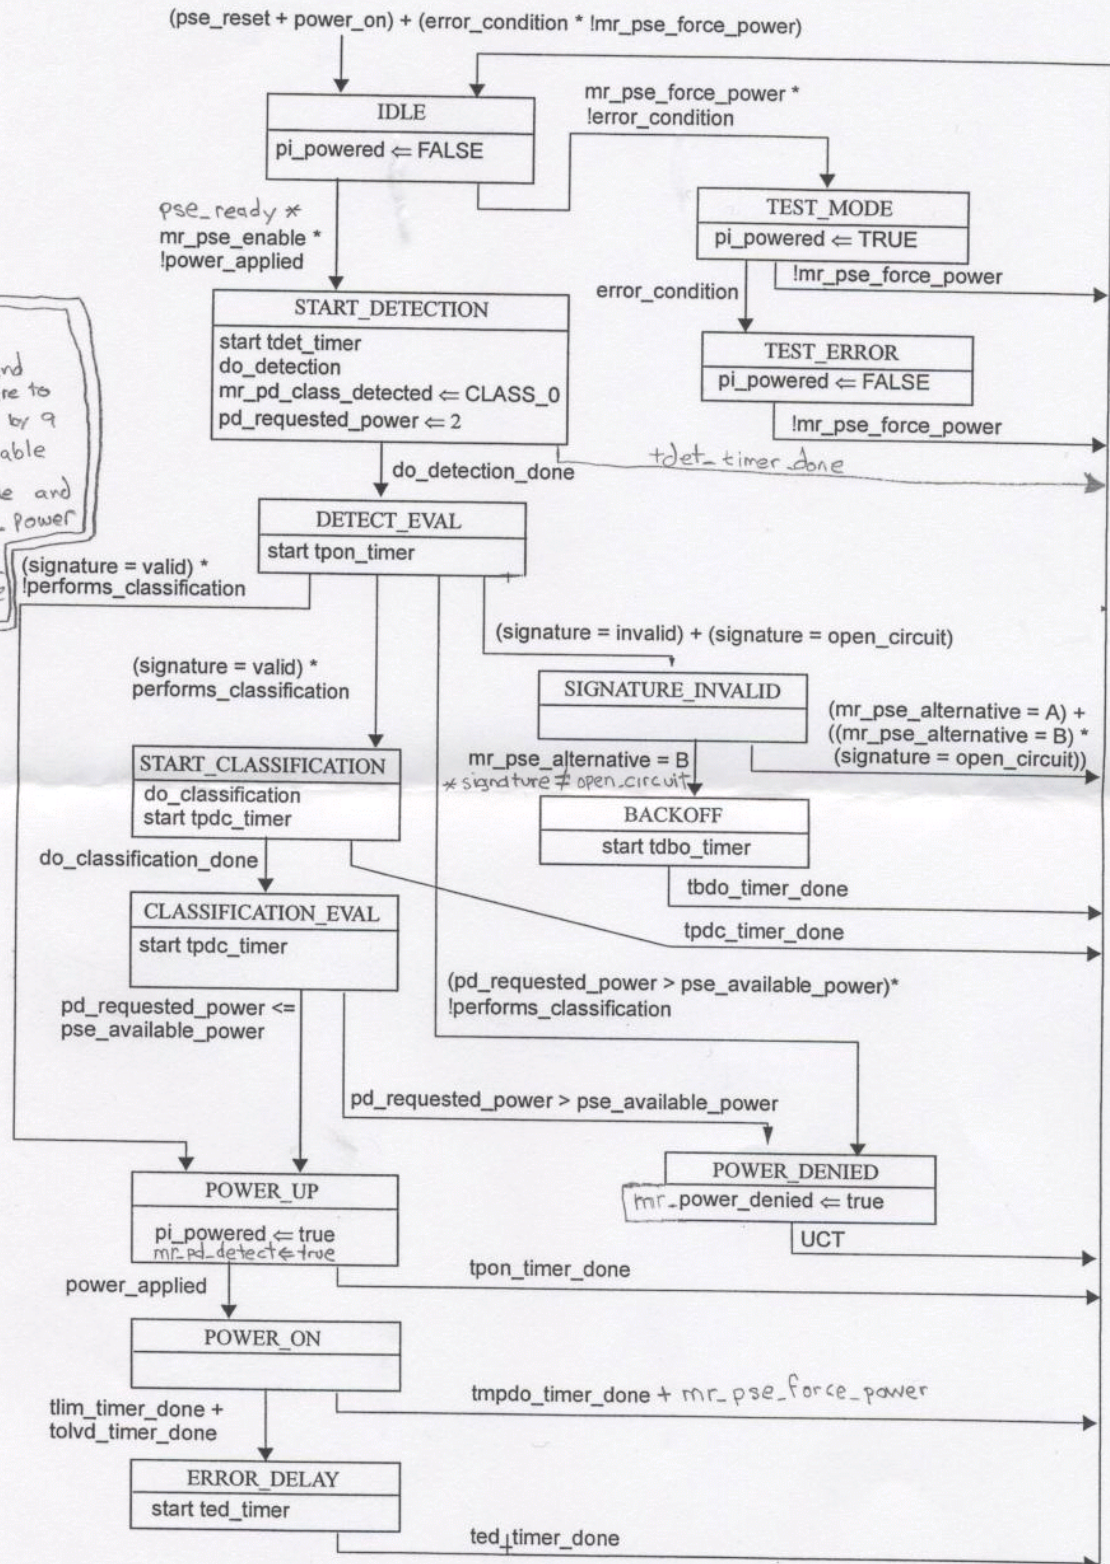

!mr_detection_test
mr_detection_test

Figure 33-5—PSE state diagram