


Welcome
to the
July 2000
Plenary Meeting
of the
802.3af DTE Power
via
MDI Task Force
La Jolla, CA
Steve Carlson, Chair

July 11 - 12, 2000

DTE Power via MDI TF




Agenda

- Welcome and Introductions
- Select Recording Secretary
- Review / Approve Agenda
- Document Distribution
- E-mail Reflector, Web Site, and Miscellaneous Information
- Objectives for This Week
 - Refine proposals
 - Consensus!
- Call for Patents

July 11 - 12, 2000

DTE Power via MDI TF




Agenda

- Presentations related to Objectives
- Motions related to Objectives
- Other Presentations
 - SC25/WG3
 - IEC/ISO
 - Proposed wording for standard
- Long Term Timeline
- New Business
- Plans for September Interim Meeting
- Approve Minutes of Ottawa Meeting
- Review New Action Items
- Adjourn

DTE Power via MDI TF

July 11 - 12, 2000




Task Force Status

- PAR approved by NesCom (1/30/2000)

P802.3af (C/LM) Standard for Information Technology - Telecommunications and Information Exchange Between Systems - Local & Metropolitan Area Networks - Specific Requirements - Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications - Data Terminal Equipment (DTE) Power via Media Dependent Interface (MDI)

July 11 - 12, 2000

DTE Power via MDI TF



E-mail Reflector

The IEEE has set up a reflector for this study group:

stds-802-3-pwrviamdi@mail.ieee.org

The reflector can be used for announcements, comments, discussions, or dissemination of information related to the work of this study group

The reflector should not be used for recruiting, advertising, soliciting, flaming, whining, subscribing, or unsubscribing

To be added to the reflector, send an E- mail containing the following line:

[subscribe stds-802-3-pwrviamdi <your email address>](#)

to

[majordomo@ mail.ieee.org](mailto:majordomo@mail.ieee.org)

To send a message to the DTE Power reflector use the email address:


[stds-802-3-pwrviamdi @ieee.org](mailto:stds-802-3-pwrviamdi@ieee.org)

Subscriptions are on an individual basis only

No proxy requests or reflectors will be subscribed

DTE Power via MDI TF

July 11 - 12, 2000



IEEE Web Site

Typical Plenary Meeting Plan (DTE Power via MDI
will meet during “Task Force” slots):

<http://grouper.ieee.org/groups/802/3/plenary.html>

802.3af 5 Criteria:

http://grouper.ieee.org/groups/802/3/power_study/public/nov99/802.3af_5criteria.pdf

802.3af PAR:


http://grouper.ieee.org/groups/802/3/power_study/public/nov99/802.3af_PAR.pdf

802.3 Voting Rules

<http://grouper.ieee.org/groups/802/3/rules/member.html>

802.3 Patent Policy

<http://grouper.ieee.org/groups/802/3/patent.html>



IEEE 802.3 Requirements for Working Group Voting Membership

If you wish to vote on 802.3 standards at the Working Group Ballot stage you need to become a Voting Member of Working Group 802.3.

Membership is by individual, not company.

To become a voter:

Attend and sign the attendance book at least 75% of the sessions of two Working Group 802.3 Plenary meetings (within the last four).

Full attendance at a two day or more duly constituted Working Group 802.3 Interim Meeting can be substituted for attendance at one plenary.

Have complete and current contact information recorded in the Working Group 802.3 database.


Request to become a voter during a Working Group 802.3 Opening or Closing plenary meeting when additions to the voter list are solicited by the Chair from the "Potential Voter" list.

To remain a voter you must:

Maintain current contact information in the Working Group 802.3 database.

Have 75% attendance during at least two of the last four plenaries (Attendance at an interim can substitute for attendance at no more than 1 plenary).

Participate in Working Group ballots. You can be dropped for not returning or abstaining in two of the last three ballots.



The Attendance Books

SIGN “THE BOOK” EVERY DAY

KEEP IT MOVING

IF YOU ARE NEW, SIGN THE NEW-BEES BOOK

Put business card in back or fill out address...


Sign this book every day; no forward signing

DO NOT REMOVE THE BOOK FROM THE ROOM;

DO NOT COPY THE BOOK

July 11 - 12, 2000

DTE Power via MDI TF



Future Meetings

Interim Meeting - September 2000 - Boston, MA


Plenary Meeting - November 6 -10, Hyatt Regency, Tampa, FL

Other plenary meetings can be found in:

<http://grouper.ieee.org/groups/802/meeting/future.pdf>


July 11 - 12, 2000

DTE Power via MDI TF




Objectives for this Meeting

- Reduce discovery methods to two
- Analyze data on mid-span, create issues list
- Analyze data on power on signal pairs, create issues list
- Examine 1st. Draft
- Re-visit voltage and current in light of new information from ISO/IEC

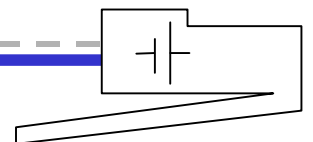

Presentation Guidelines

- Requests for presentation time should be scheduled with the chair two weeks prior to the meeting
- Presentations should be supplied via e-mail as a PDF file on week before the meeting
- Avoid fussy backgrounds or other decorative graphics
- No animations, video clips, etc.
- Goal: to keep the PDF small enough to fit on a single floppy disk




Short-Term Schedule

- March Plenary, Albuquerque
 - First official meeting of the Task Force
- May Interim, Ottawa
 - Last new proposal accepted
- July Plenary
 - 1st. Draft
- September Interim
 - Last new feature

July 11 - 12, 2000

DTE Power via MDI TF



DTE Power Objectives

November 10, 1999 as approved by DTE Power via MDI SG.

(1) Economically provide power over a twisted- pair link segment to a single Ethernet device. To be included:

10BASE- T,

100BASE- TX.

To be considered:

1000BASE- T.

(2) Select one power distribution technique for world- wide use

(3) Not cause damage and interoperate with compliant RJ- 45 MDI Ethernet devices including:


a. Switch- to- switch connections (both supplying power)

b. Cross- over cables

c. Common mode termination implementations


d. Shorted conductors, pairs or loop- back plug

(4) Define a capability detection function that works with a powered and an unpowered device




DTE Power Objectives

- (5) Select the voltage, minimum and maximum current and wattage to be supplied
- (6) Add appropriate management objects for power capability and status
- (7) Support current standard, 4- pair, horizontal cabling infrastructure for installed Cat 3 and Cat 5 cabling
- (8) Preserve the signal transmission and isolation characteristics of existing equipment and cabling
- (9) Maintain normal functionality of Link Integrity Test function in legacy and new devices
- (10) Consider mid- span power insertion, powering over the signal pairs, and interaction with other RJ- 45 interfaces: Token Ring, ATM, FDDI TP- PMD, 1000BASE- T, ISDN, networking test equipment, PBX, IEEE 1394, devices listed in ISO/ IEC 11801 : 1995 Annex G



Decision List

- Maximum Voltage (Objective 5)
- Maximum and minimum current (Objective 5)
- Are classifications required, and (if so) how many (Objective 6)
- Detection to be made on same pair as power
- Which pair(s)? (Objective 7)
- What level of support for 2-pair legacy systems (Objective 7)
- Level of support for 1000BASE-T (Objectives 1 & 9)
- Determine fault behavior




Decision List

- Determine type of discovery mechanism
- Single or multi-tiered discovery mechanism
- Of the known RJ-45 devices can we determine which can we live with?
- Level of support for mid-span insertion
- AC or DC
- Should we define a standard means to provide optional visual indications of the ability to supply power from a connector and/or is it currently providing power?
- Maximum voltage not to exceed SELV IEC 950


DTE Power via MDI TF

July 11 - 12, 2000




802.3af Requirements

- Without specifying the two and only two pairs to be utilized for DTE power, DTE power shall utilize two pair powering where each wire in the pair is at the same nominal potential and the power supply potential is between the two pairs selected. - January 2000 Interim
- Regardless of the detection scheme adopted and the power feed scheme adopted, the power detection and power feed shall operate on the same set of pairs. - January 2000 Interim




802.3af Requirements

- Regardless of the final voltage selected, the DTE power max voltage shall not exceed the limits of SELV per IEC 950. - January 2000 Interim
- In order to progress we accept that there are two isolation requirements of 802.3, environment A and B per 802.3 section 27.5.3 et al, and that for the purposes of this committee we will treat as a priority for consideration environment B without precluding environment A. - March 2000 Plenary




802.3af Requirements

- For DC systems the minimum output voltage of the source equipment power supply shall be at least 40VDC. - March 2000 Plenary
- For DC systems, the source device shall be capable of supplying a minimum current of at least 300mA per port. - March 2000 Plenary
- The solution for DTE Powering shall support mid-span insertion of the power source. - March 2000 Plenary



802.3af Requirements

- 802.3af systems shall distribute DC Power - May 2000 Interim
- If both pair sets may be used for powering, midspan shall supply power on 45,78 - Supplying power on pins 12,36 from the midspan is for a later revision of the standard. - May 2000 Interim
- 802.3af proceed with the development of a low frequency, low energy common mode detection method. - May 2000 Interim
- That it be an objective of the 802.3af task force to determine the optimal method to apply power at the "mid-span" and "DCE end" to minimize data-path impairments at a reasonable cost. -May 2000 Interim
- We accept the powering of the DTE via either sets of wire pairs (1-2, 3-6 and 4-5, 7-8), in anticipation the detailed technical and economic feasibility of each having been shown prior to the Working Group Ballot. - May 2000 Interim




Presentations

- “Safety Considerations - Power Fault Protection”, Lisa Leo, Raychem
- “Coupled Diode Discovery Protocols and Prototypes,” Rick Brooks, Nortel
- “DTE Power via MDI Discovery Process,” G. Vergnaud, R. Gass, R. Jaeger, Alcatel


July 11 - 12, 2000

DTE Power via MDI TF




Presentations

- “Power on the 802.3 Connection”, John Austerman, CMS Technologies
- “IEEE 802.3 DTE Power via MDI Resistive Detection and Signature Protocol Follow-Up,” Robert Leonowich, et. al, Lucent
- “PowerDsine Follow-On,” Amir Lehr, PowerDsine
- “Mid-Span Insertion and Generic Cabling Standards,” Bob Love, LAN Connect Consultants
- “ Power DTE Mid-Span Cabling Implementation,” Michel Bohbot, Nordx/CDT, Roger Karam, Cisco
Moty Goldis, Lucent



Presentations

- “Power over Signal Pairs - Why is Cisco Pursuing?,” Chris Cullen, Cisco
- “Economic Feasibility of Power Over the Signal Pairs,” Karl Nakamura, Cisco
- “Technical Feasibility of Providing Power Over the Signal Pairs,” Roger Karam, Cisco
- “DTE Power for 1000BASE-T,” Kevin Brown, Broadcom
- “Transformer Characteristics when Used in Mid-Span Applications”, Henry Heinrichs, Pulse
- “Hard Choices for Voltage,” Mike McCormack, 3Com




Presentations


- “Discovery Method Evaluations,” Karl Nakamura, Cisco
- “Powered Device Limits,” Arlan Anderson, Nortel
- “Signal Pair Analysis: What Needs to be Done,” Dan Dove, H-P

July 11 - 12, 2000

DTE Power via MDI TF




Long Term Schedule

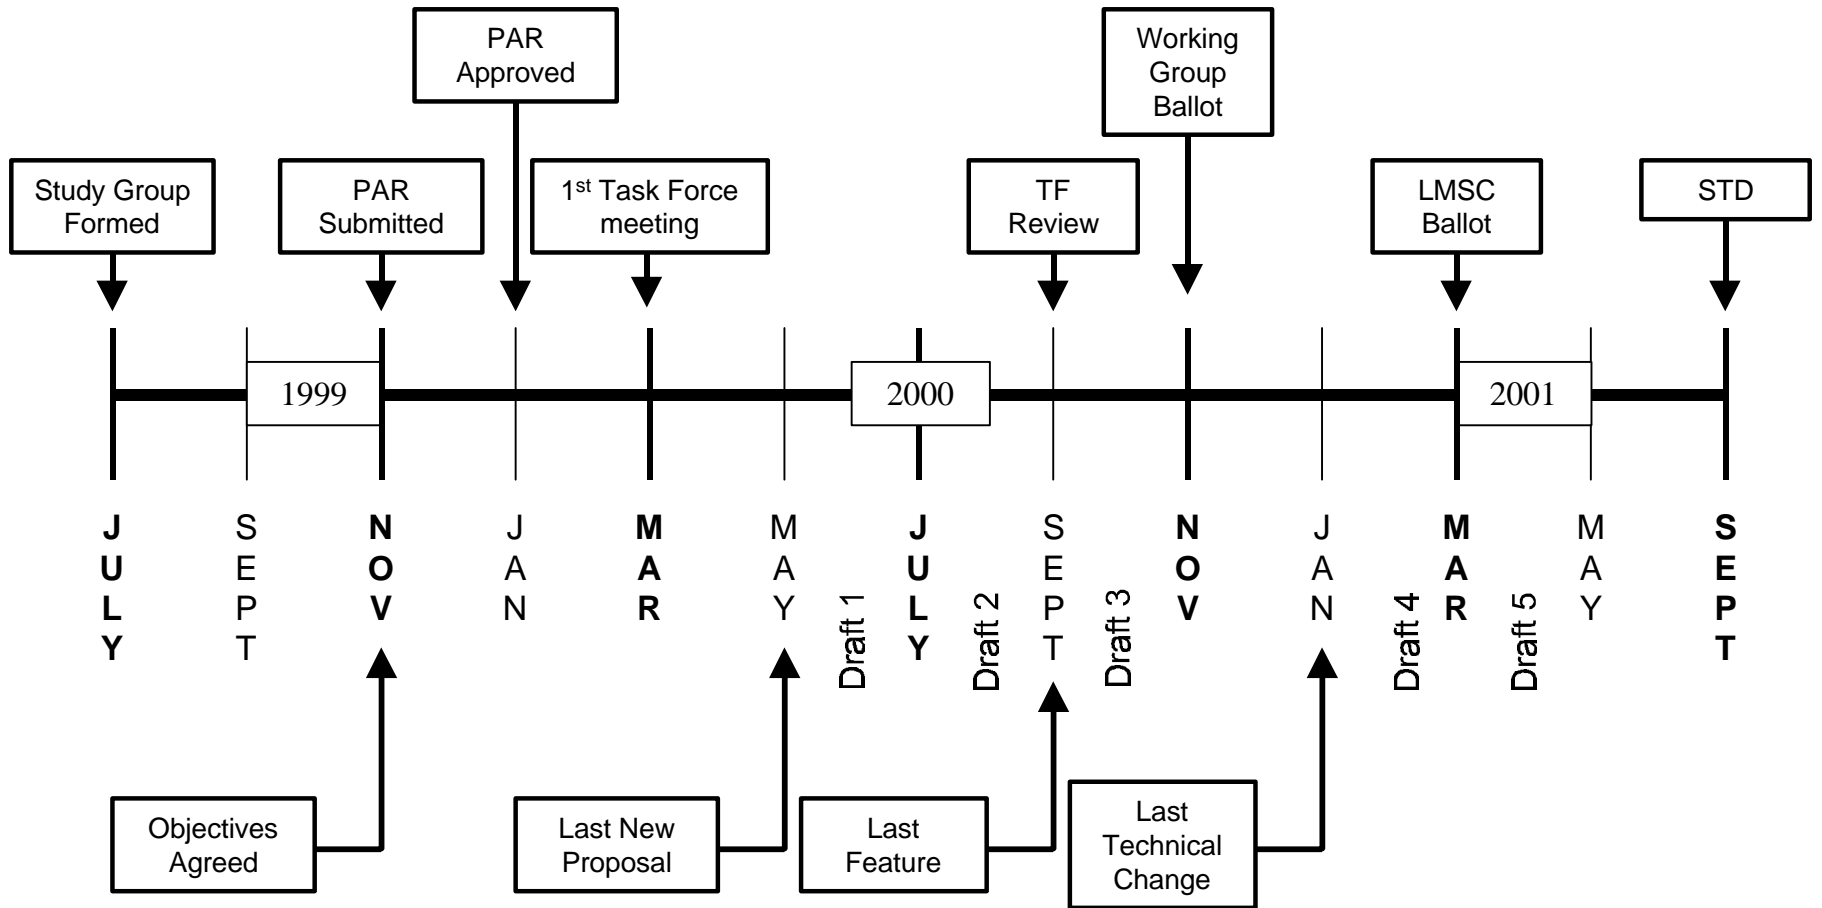

DTE Power via MDI TF

July 11 - 12, 2000



Other Business

- New Business
- Plans for September Interim
- Approve Minutes of May Meeting
- Review New Action Items
- Adjourn

July 11 - 12, 2000

DTE Power via MDI TF

