



# 1000BASE-T Low-Power Idle

**Presented by Adam Healey**

**Contributors: Noel Butler, Niall Fitzgerald, Brian Murray,  
Oisín O’Cuanachain, Jacobo Riesco**



**Energy  
Efficient  
Ethernet**

**IEEE P802.3az Task Force  
Munich, Germany  
May 13, 2008**

# Supporters

- To be updated

## Scope and purpose

- Illustrate changes to IEEE 802.3 Clause 40 required to implement concepts described in healey\_01\_0308
- Provide detailed timing diagrams illustrating the operation of the proposed state diagrams
- Estimate the worst-case time to wake up from low-power idle

# GMII signaling: Transmit

- Table 35-1

TX_EN	TX_ER	TXD[7:0]	Description	PLS_DATA.request parameter
0	0	00 through FF	Normal inter-frame	TRANSMIT_COMPLETE
0	1	00	Reserved	—
0	1	01	EEE low power idle	LP_IDLE
0	1	02 through 0E	Reserved	—
0	1	0F	Carrier extend	EXTEND (eight bits)
...	...	...	...	...

## GMII signaling: Receive

- Table 35-2

RX_DV	RX_ER	RXD[7:0]	Description	PLS_DATA.indication parameter
0	0	00 through FF	Normal inter-frame	No applicable parameter
0	1	00	Normal inter-frame	No applicable parameter
<b>0</b>	<b>1</b>	<b>01</b>	<b>EEE low power idle</b>	<b>LP_IDLE</b>
0	1	02 through 0D	Reserved	—
0	1	0E	False carrier indication	No applicable parameter
...	...	...	...	...

## PCS encoding of LP\_IDLE

- **40.3.1.3.4 Generation of bits  $Sd_n[8:0]$**

The bit  $Sd_n[3]$  is used to scramble the GMII data bit  $TXD_n[3]$  during data mode and to encode `loc_lpi_req` otherwise. It is defined as

$$Sd_n[3] = \begin{cases} Sc_n[3] \wedge TXD_n[3], & \text{if } (tx\_enable_{n-2} = 1) \\ Sc_n[3] \wedge 1, & \text{else if } (loc\_lpi\_req = TRUE) \\ Sc_n[3], & \text{else} \end{cases}$$


## New variables

- lpi\_mode
  - Set to ON when the PHY is in low-power idle mode and set to OFF otherwise.
- loc\_lpi\_req
  - Set to TRUE when the transmit MAC indicates it is going to sleep, and requesting low-power idle mode, via the GMII, and set to FALSE otherwise.
- rem\_lpi\_req
  - This is the link partner's version of loc\_lpi\_req.
- pma\_rx\_indicate
  - Indicate that transmission from the link partner has been received at the MDI. This signal will be set to FALSE when the PHY detects that the link partner is sending zero (the link partner tx\_mode = SEND\_Z) and will be set to TRUE otherwise.


## New timers

- lpi\_timer
  - Generic timer function used for the various durations  $t_s$ ,  $t_q$ ,  $t_w$ , and  $t_u$ .
- lpi\_wt\_timer
  - Time the PHY transmits before it transitions to the WAKE\_SILENT state following initiation of wake.
- lpi\_wz\_timer
  - Time the MASTER PHY remains in the WAKE\_SILENT state (transmitting ZERO) before transitioning to the WAKE\_TRAINING state.
- lpi\_min\_timer
  - Minimum time,  $t_m$ , the PHY waits in the WAKE\_TRAINING state before going back into ACTIVE mode.


# PCS Transmit state diagram, Figure 40–9

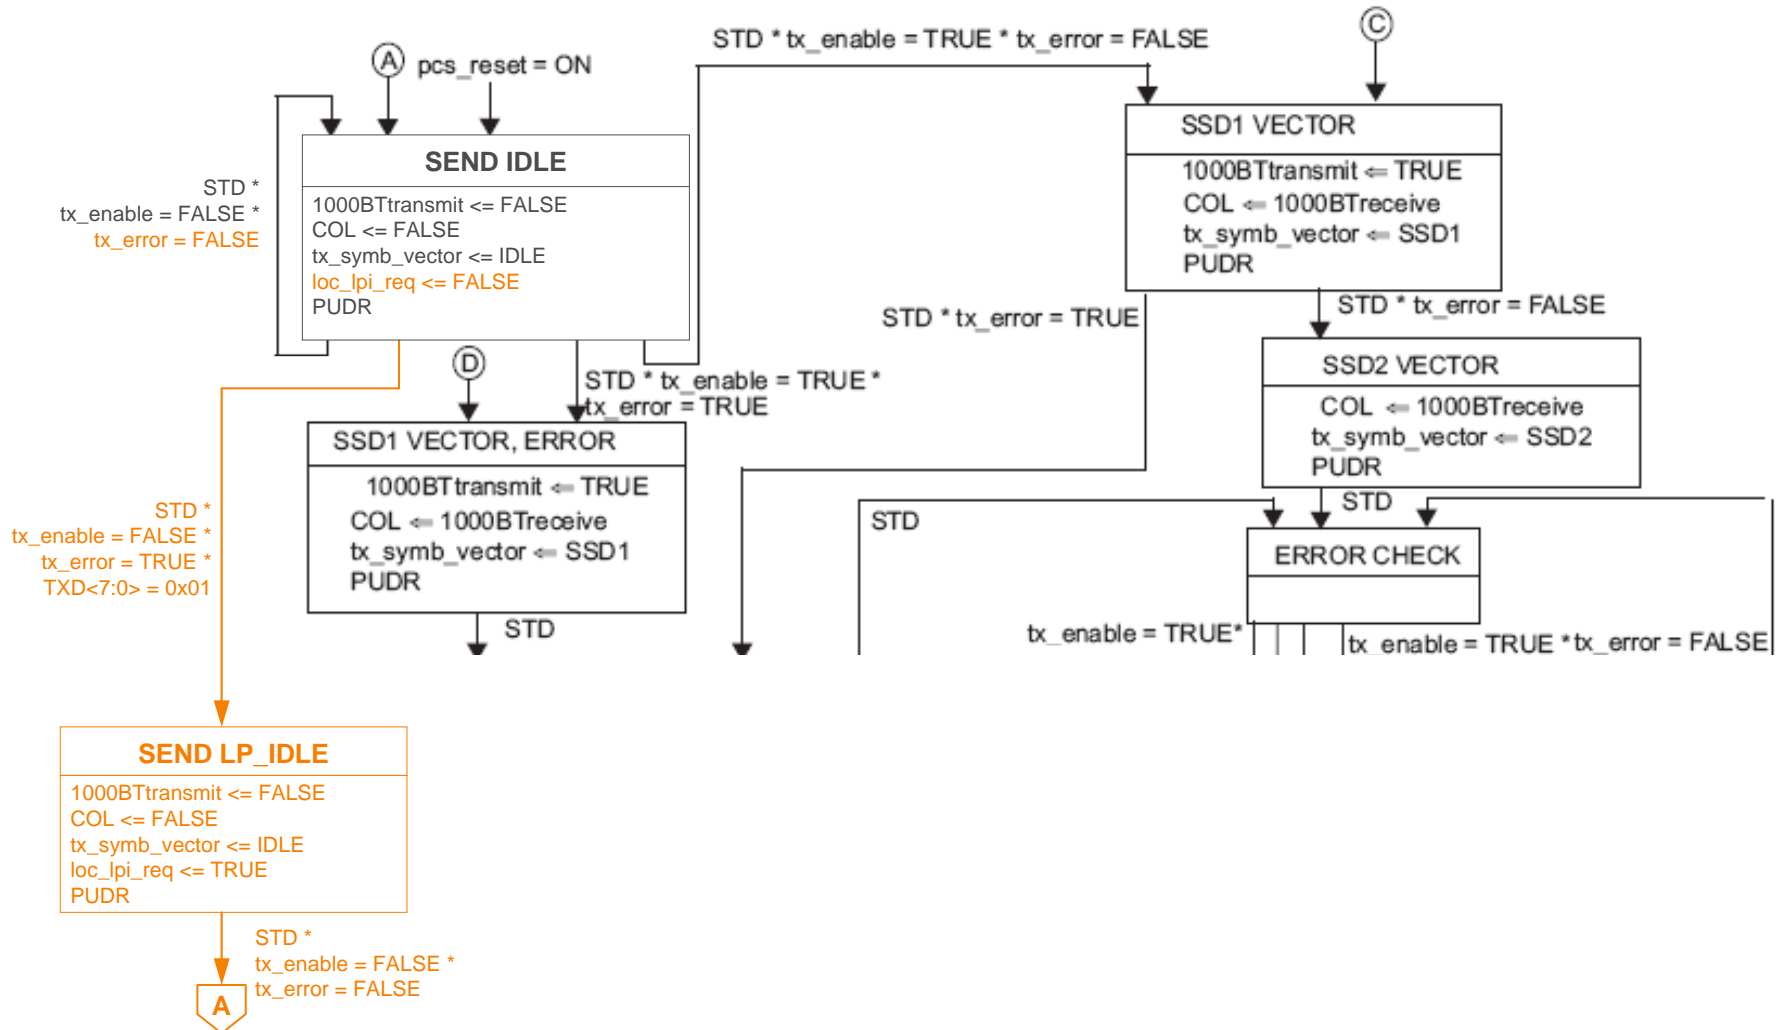


# PCS Receive state diagram part a, Figure 40–10a

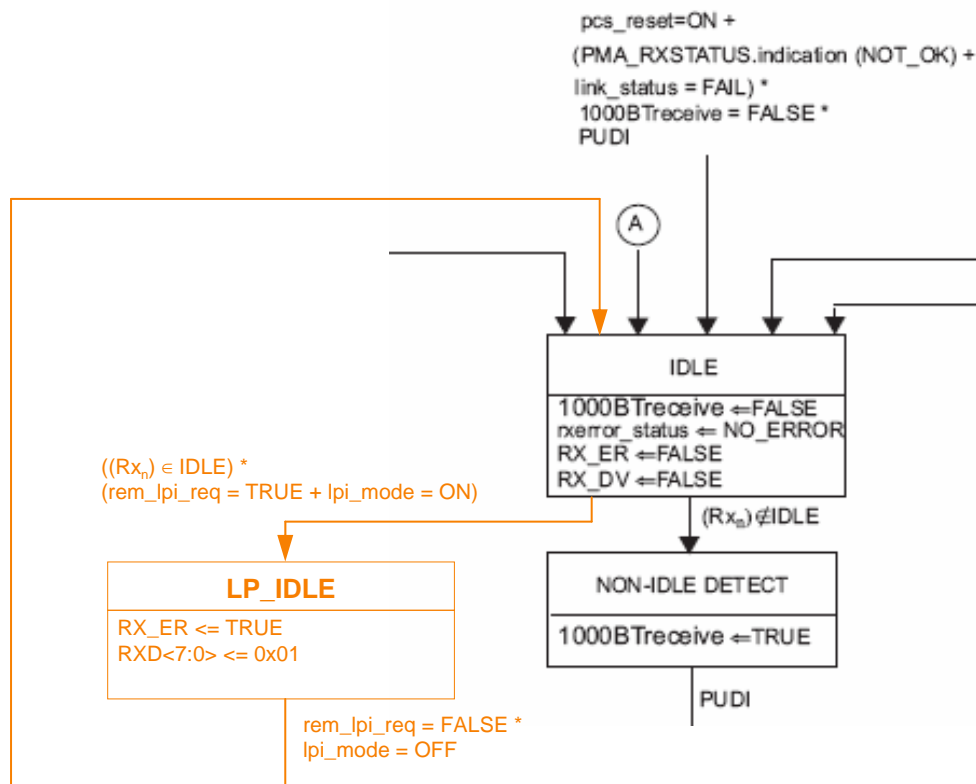



# PHY Control state diagram, Figure 40–15

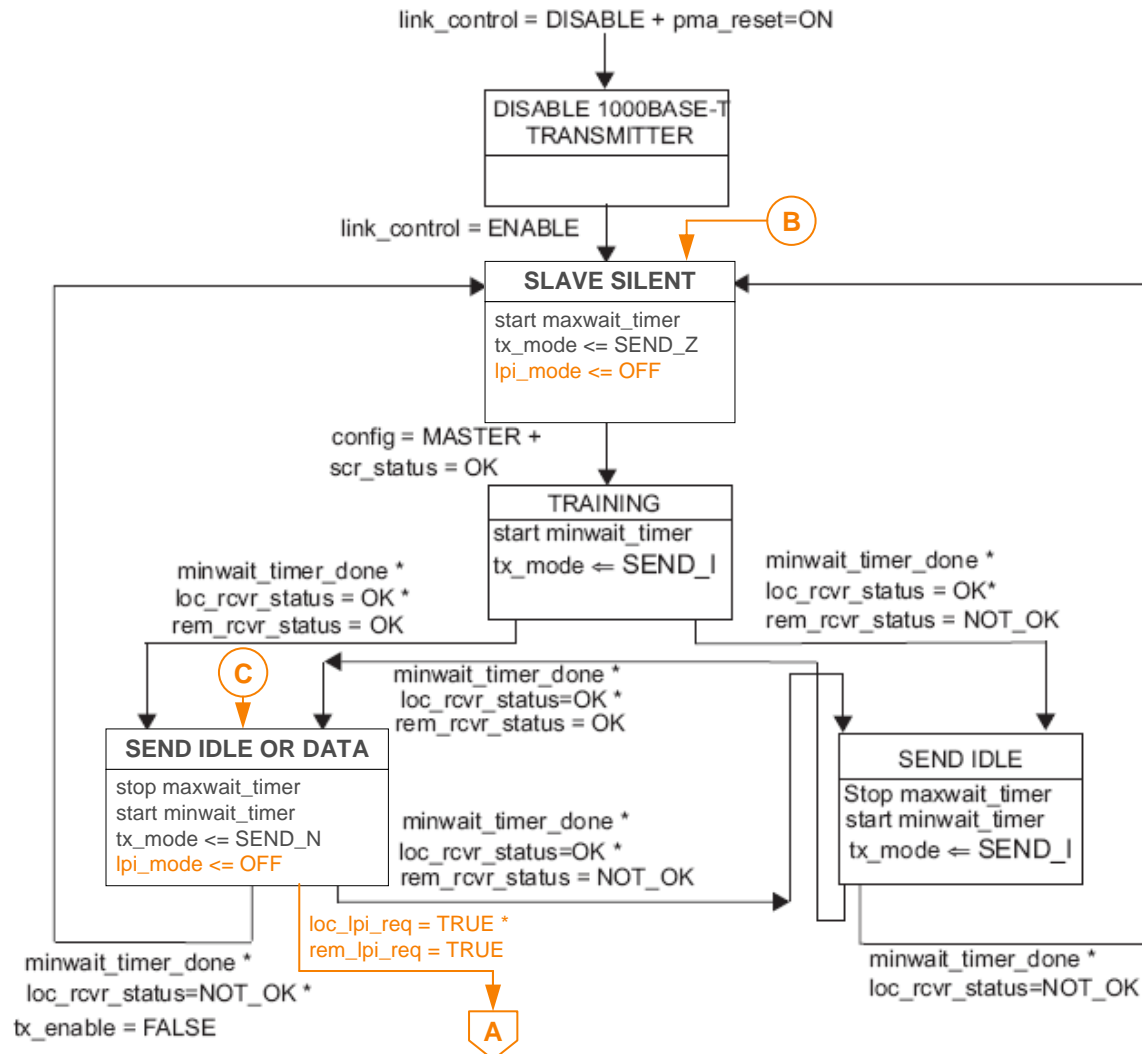


# Low-power idle state diagram (PHY Control extension)

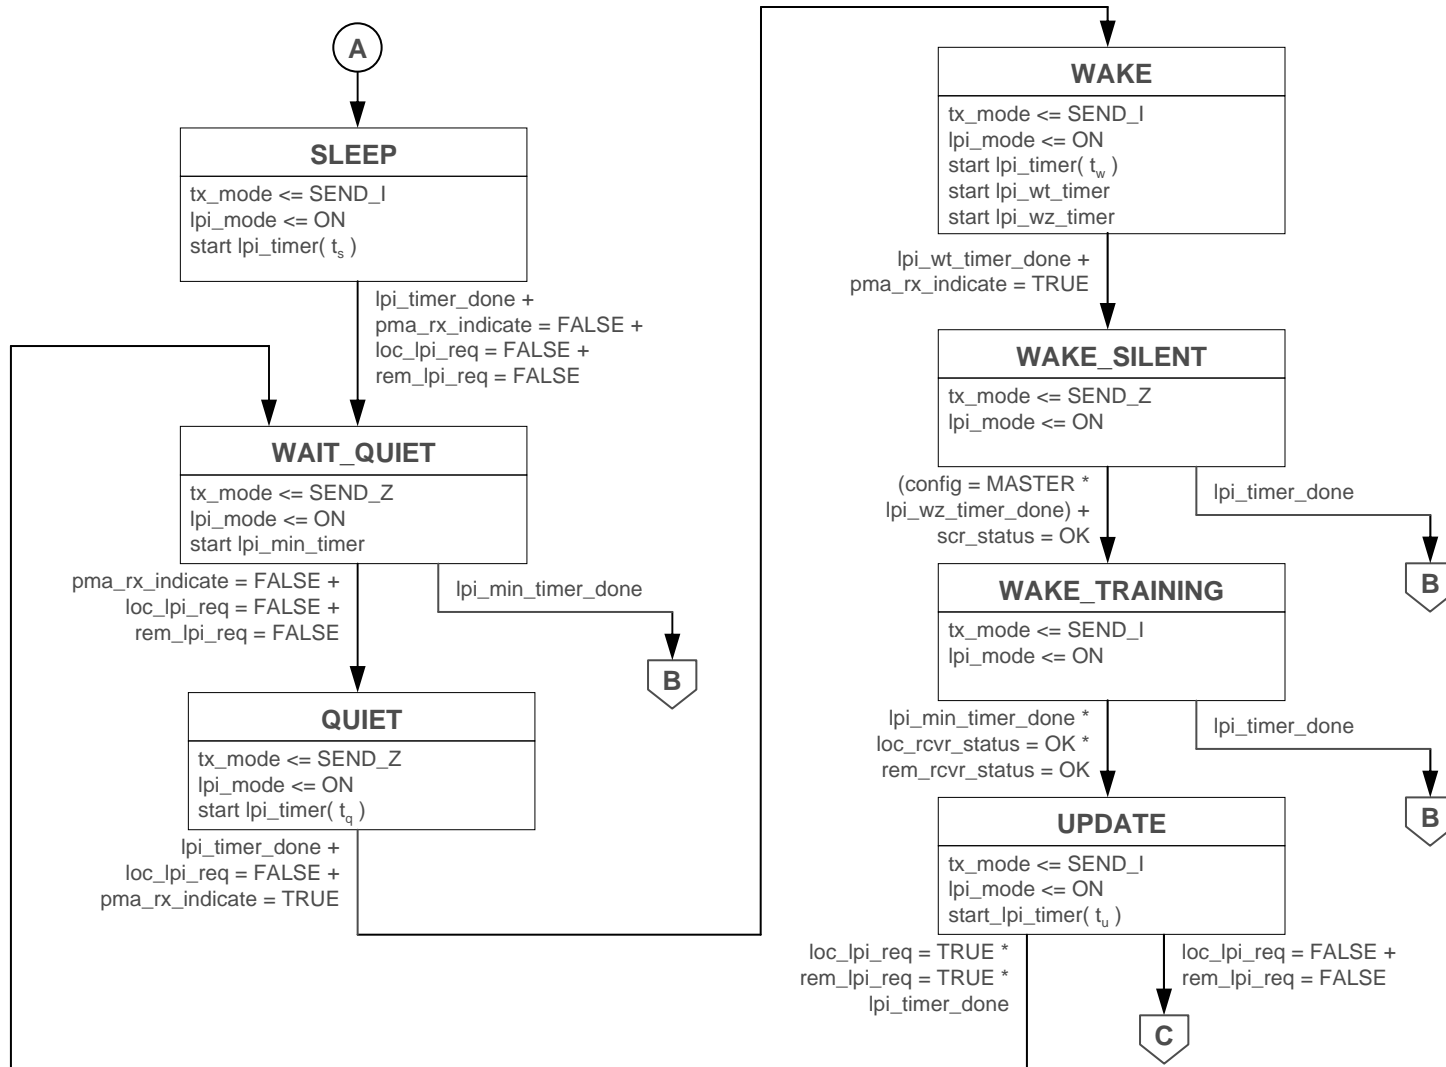


# Timing diagram: Only Master or Slave sleeps

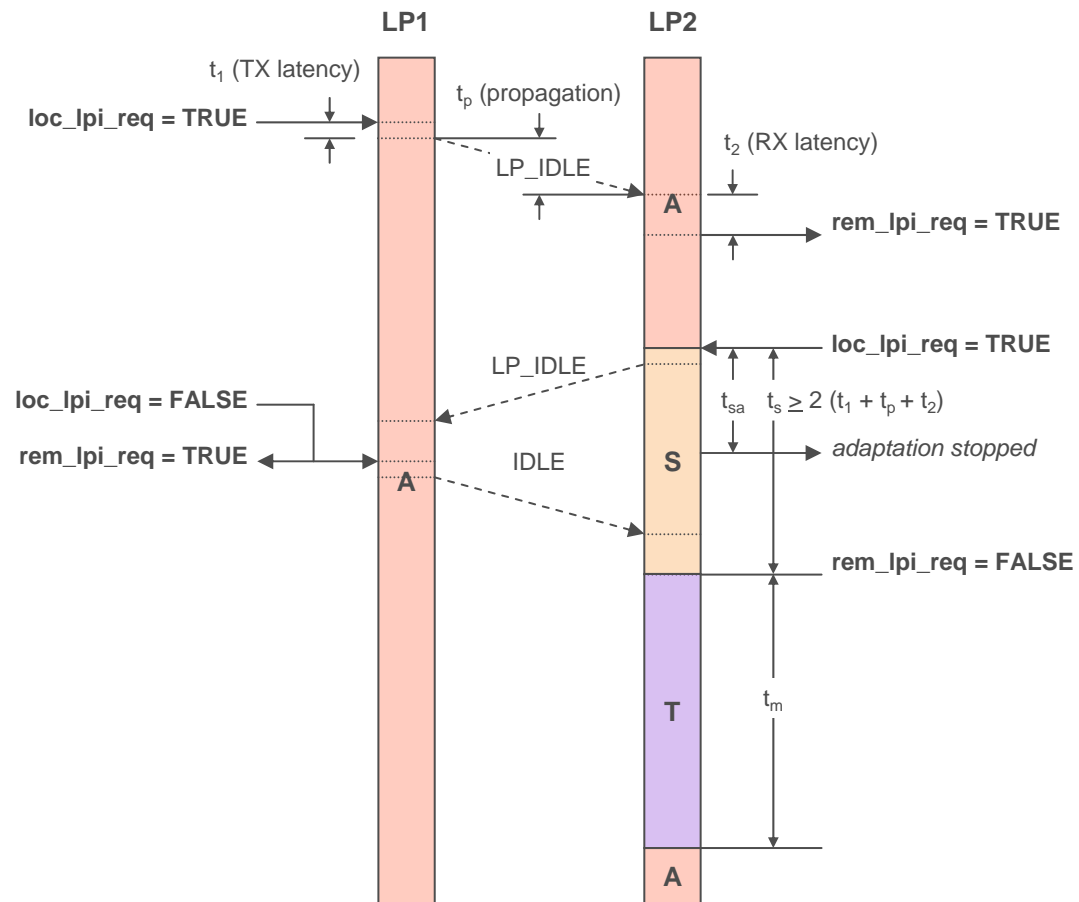

# Timing diagram: Enter low-power idle

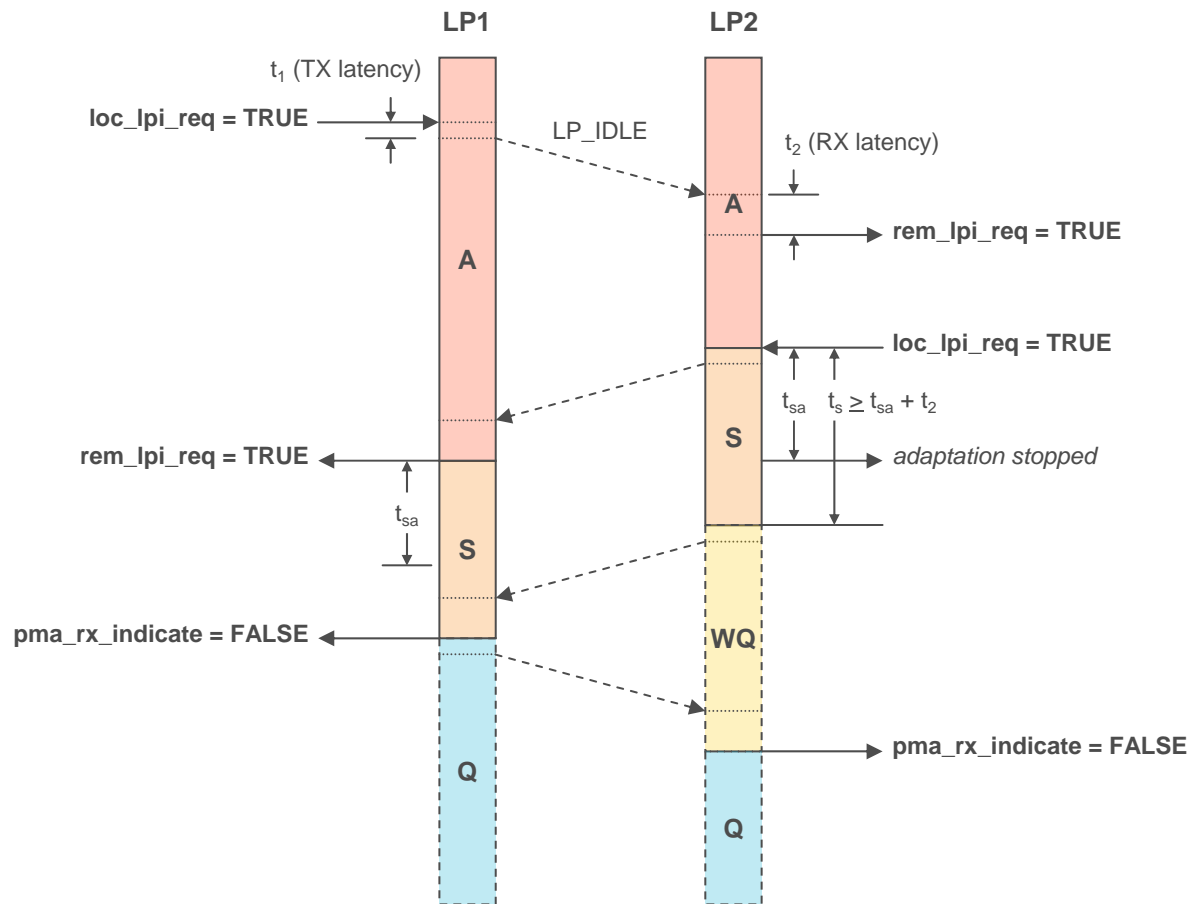

# Timing diagram: Master wakes up first

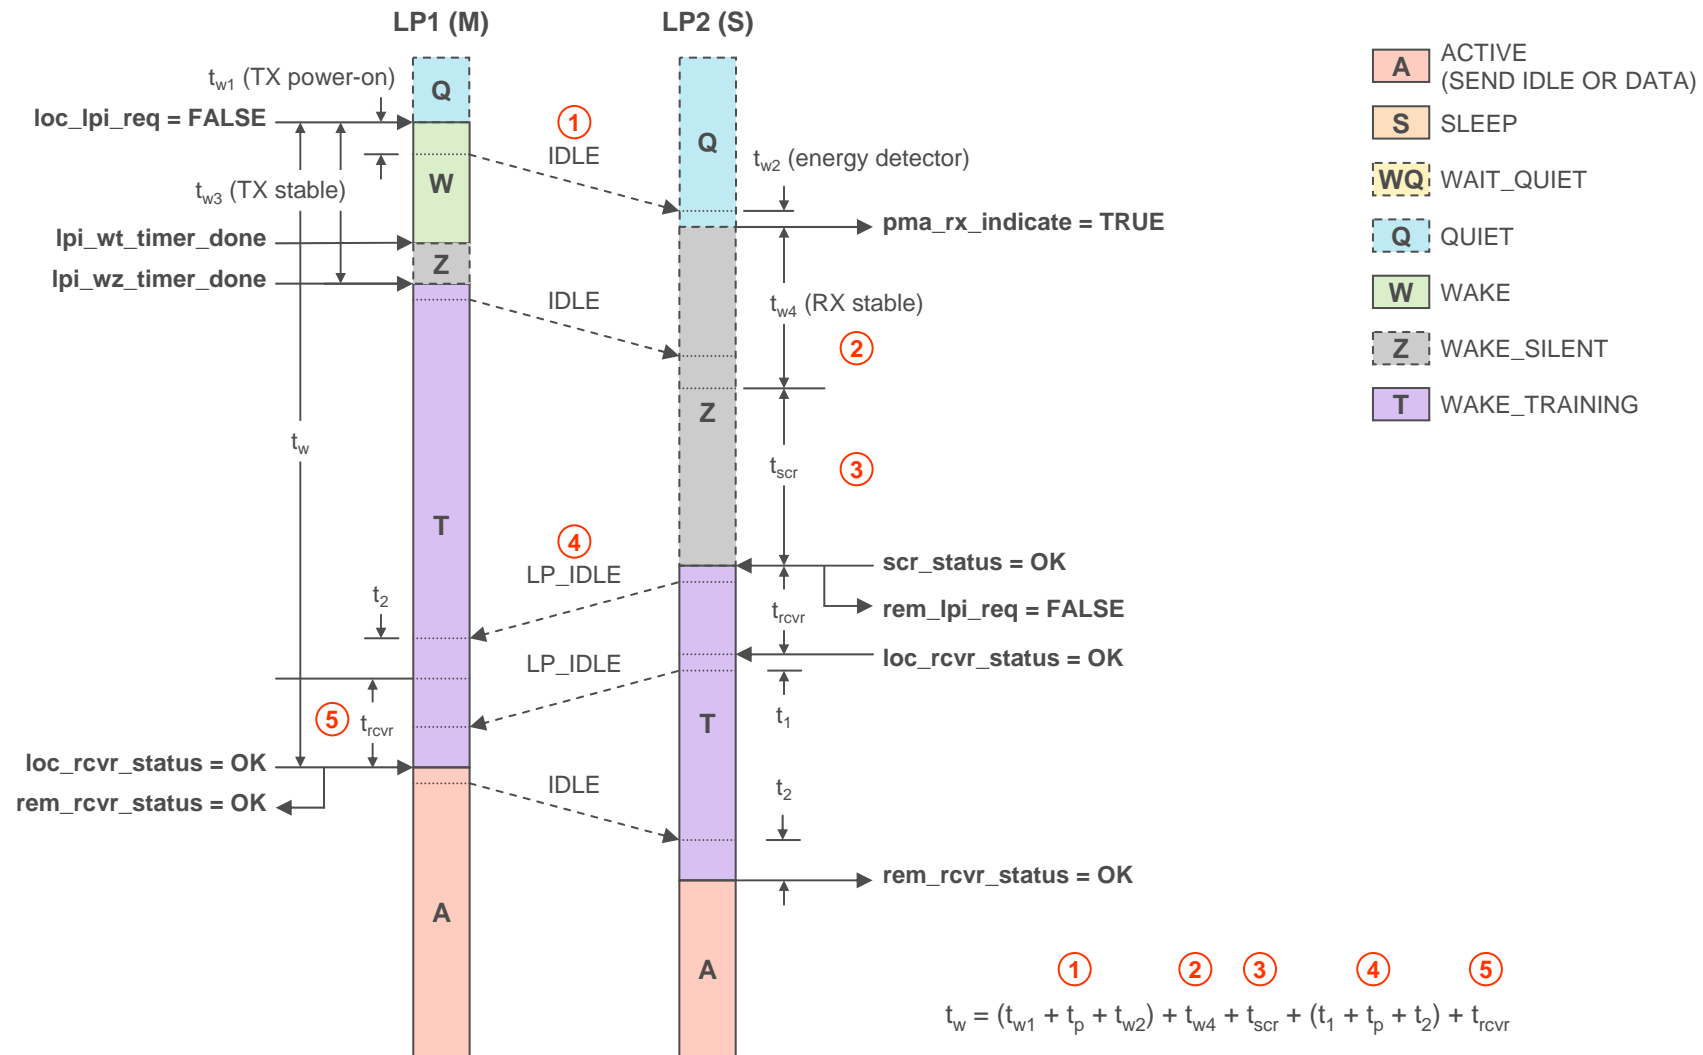


## Wake-up time analysis: Master wakes up first

$$t_w = (\overset{\textcircled{1}}{t_{w1}} + \overset{\textcircled{2}}{t_p} + \overset{\textcircled{3}}{t_{w2}}) + \overset{\textcircled{4}}{t_{w4}} + \overset{\textcircled{5}}{t_{scr}} + (t_1 + t_p + t_2) + t_{rcvr}$$

Label	Max.	Units
<b>①</b>	1,650	BT
<b>②</b>	5,000	BT
<b>③</b>	3,000	BT
<b>④</b>	878	BT
<b>⑤</b>	1,000	BT
<b><math>t_w</math></b>	<b>11,528</b>	<b>BT</b>

- Times chosen to allow very low power during quiescent mode
- The wake up time includes two cable propagation delays
- Maximum envelope frame size, with preamble and minimum inter-frame gap, is 16,160 BT

# Timing diagram: Slave wakes up first

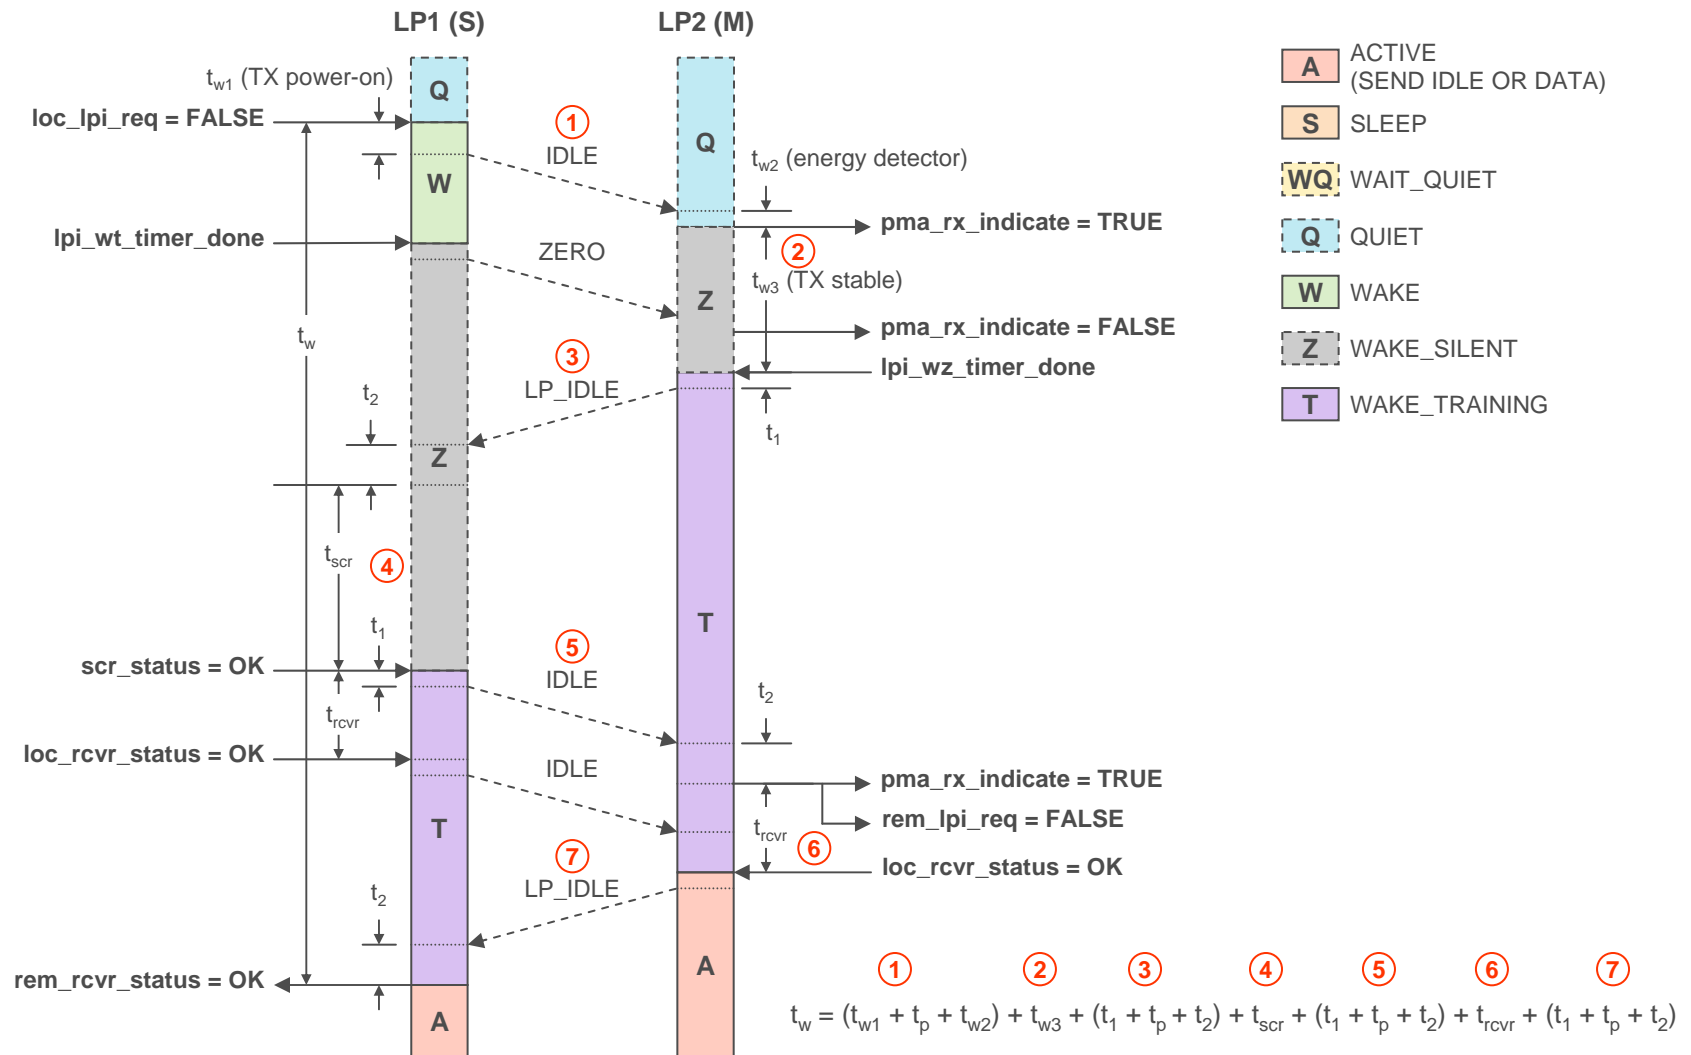


## Wake-up time analysis: Slave wakes up first

$$t_w = \overset{\textcircled{1}}{(t_{w1} + t_p + t_{w2})} + \overset{\textcircled{2}}{t_{w3}} + \overset{\textcircled{3}}{(t_1 + t_p + t_2)} + \overset{\textcircled{4}}{t_{scr}} + \overset{\textcircled{5}}{(t_1 + t_p + t_2)} + \overset{\textcircled{6}}{t_{rcvr}} + \overset{\textcircled{7}}{(t_1 + t_p + t_2)}$$


Label	Max.	Units
<b>①</b>	1,650	BT
<b>②</b>	5,000	BT
<b>③</b>	878	BT
<b>④</b>	3,000	BT
<b>⑤</b>	878	BT
<b>⑥</b>	1,000	BT
<b>⑦</b>	878	BT
<b><math>t_w</math></b>	<b>13,284</b>	<b>BT</b>

- Times chosen to allow very low power during quiescent mode
- The wake up time includes four cable propagation delays
- Maximum envelope frame size, with preamble and minimum inter-frame gap, is 16,160 BT

# Timing diagram: Refresh

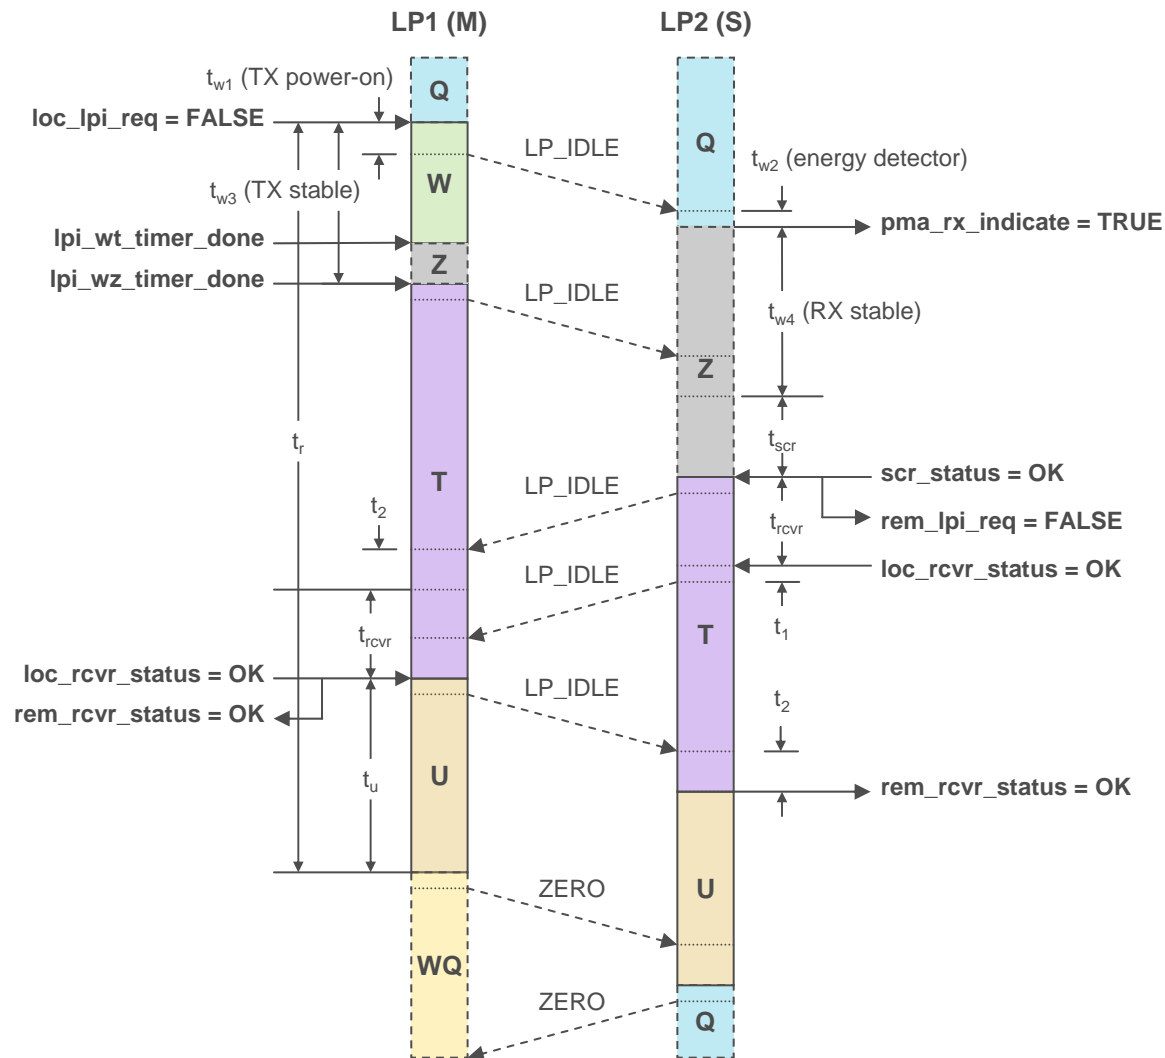

# Timing recovery simulation results

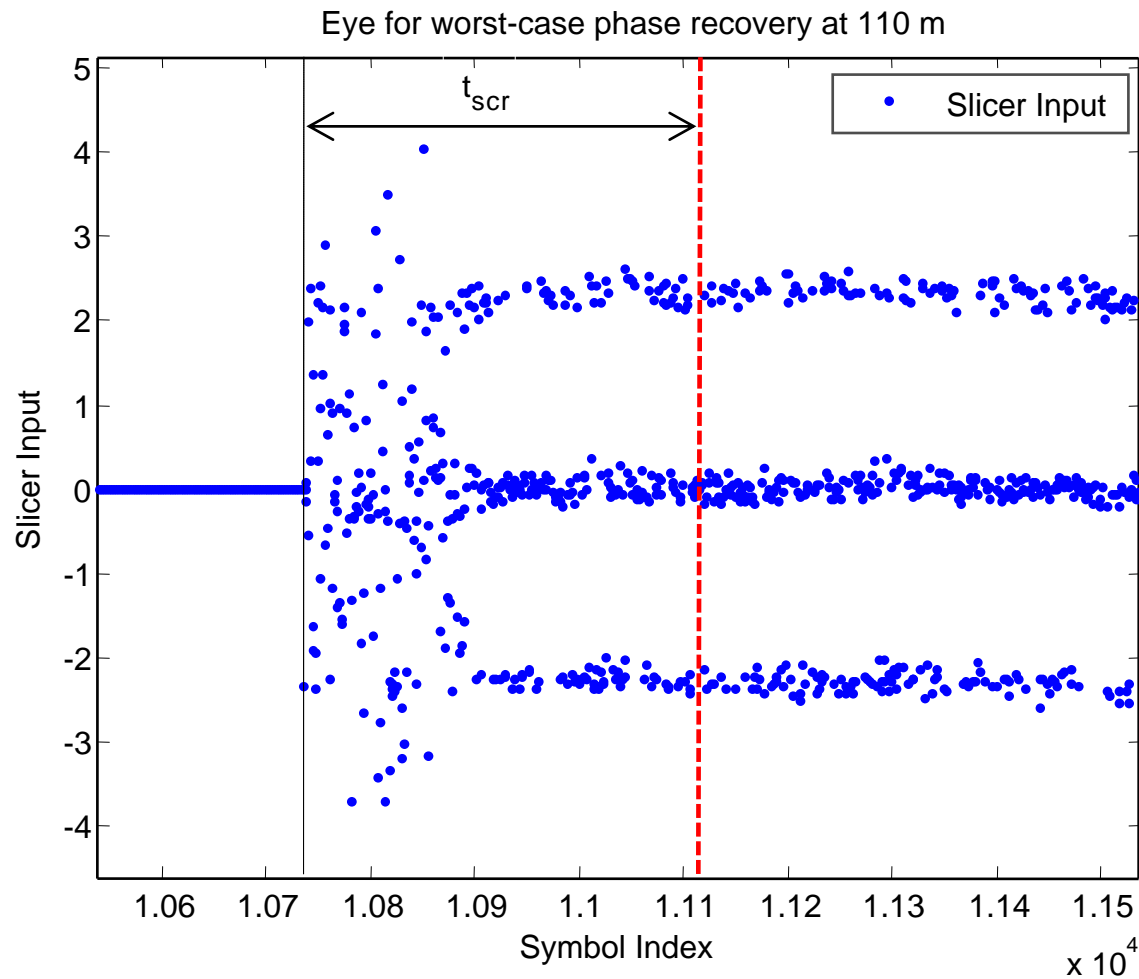

## 1000BASE-T timing parameters (current view)

Label	Parameter	Min.	Typ.	Max.	Units
$t_s$	Minimum time PHY transmits before going quiet	TBD			ms
$t_m$	Minimum time PHY waits in the WAKE_TRAINING state before returning to normal operation	1.8			$\mu$ s
$t_q$	Time PHY remains quiet before sending refresh		100		ms
$t_u$	Time PHY transmits during refresh to enable timing and coefficient update		1		ms
$t_{wt}$	Time PHY transmits to initiate wake-up in the link partner		TBD		ms
$t_{w3}$	Transmitter stabilization time			5.0	$\mu$ s
$t_w$	Maximum time to transition from low-power idle to normal operation			13.3	$\mu$ s

## Summary

- 1000BASE-T low-power idle may be implemented with modest modifications of the existing Clause 40 state diagrams and a new state diagram defining behavior in the low-power mode
- The worst-case time to wake up from low-power idle is estimated to be less than the time to transmit a maximum length envelope frame
- Auto-negotiation of Energy Efficient Ethernet capability, and timing parameters still need to be described
  - Identify which parameters should be negotiated, and which should be fixed
  - Define the range, resolution, and encoding of timing parameters