

100G Parallel SMF Skew

John Petrilla: Avago Technologies

May 2013

Contributors

Contributors

Pete Anslow

Ciena

Fibre Characteristics Tool

Paul Kolesar

CommScope

Skew Calculator Tool

100G Parallel SMF Skew

Presentation Objectives:

- Provide results from an analysis of lane skew expected for 500 m of parallel SMF

Conclusion:

- A 500 m parallel SMF implementations fits within the skew constraints of 802.3ba and 802.3bj


References

Fibre_characteristics_V_4_0_draft_2.xls (Pete Anslow author)

Kolesar_02_0508.xls (Skew model, Paul Kolesar author)

802.3 clause 80

•Proposed position in 802.3 architecture

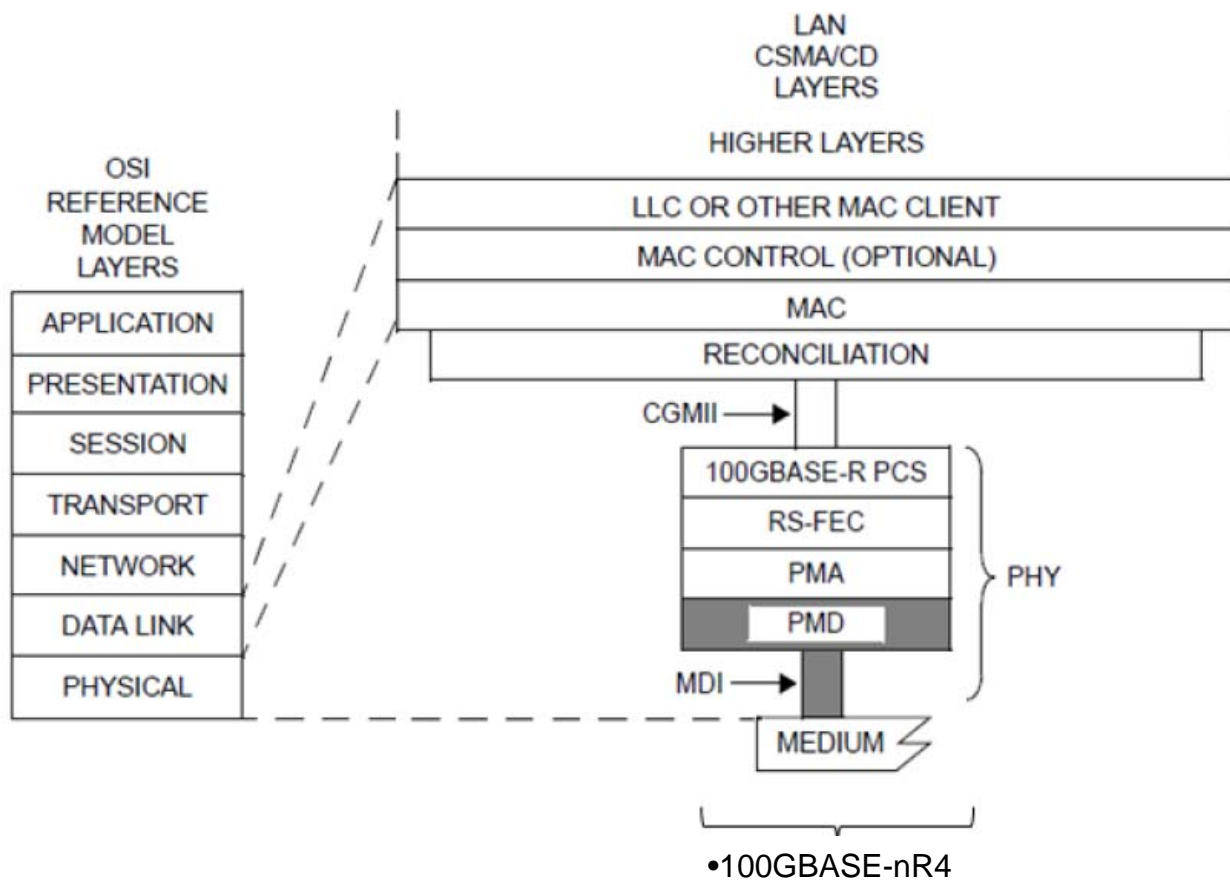

CGMII = 100 Gb/s MEDIA INDEPENDENT INTERFACE
 LLC = LOGICAL LINK CONTROL
 MAC = MEDIA ACCESS CONTROL
 MDI = MEDIUM DEPENDENT INTERFACE

PCS = PHYSICAL CODING SUBLAYER
 PHY = PHYSICAL LAYER DEVICE
 PMA = PHYSICAL MEDIUM ATTACHMENT
 PMD = PHYSICAL MEDIUM DEPENDENT
 RS-FEC = REED-SOLOMON FORWARD ERROR CORRECTION

Fiber Optic Links Interfaces

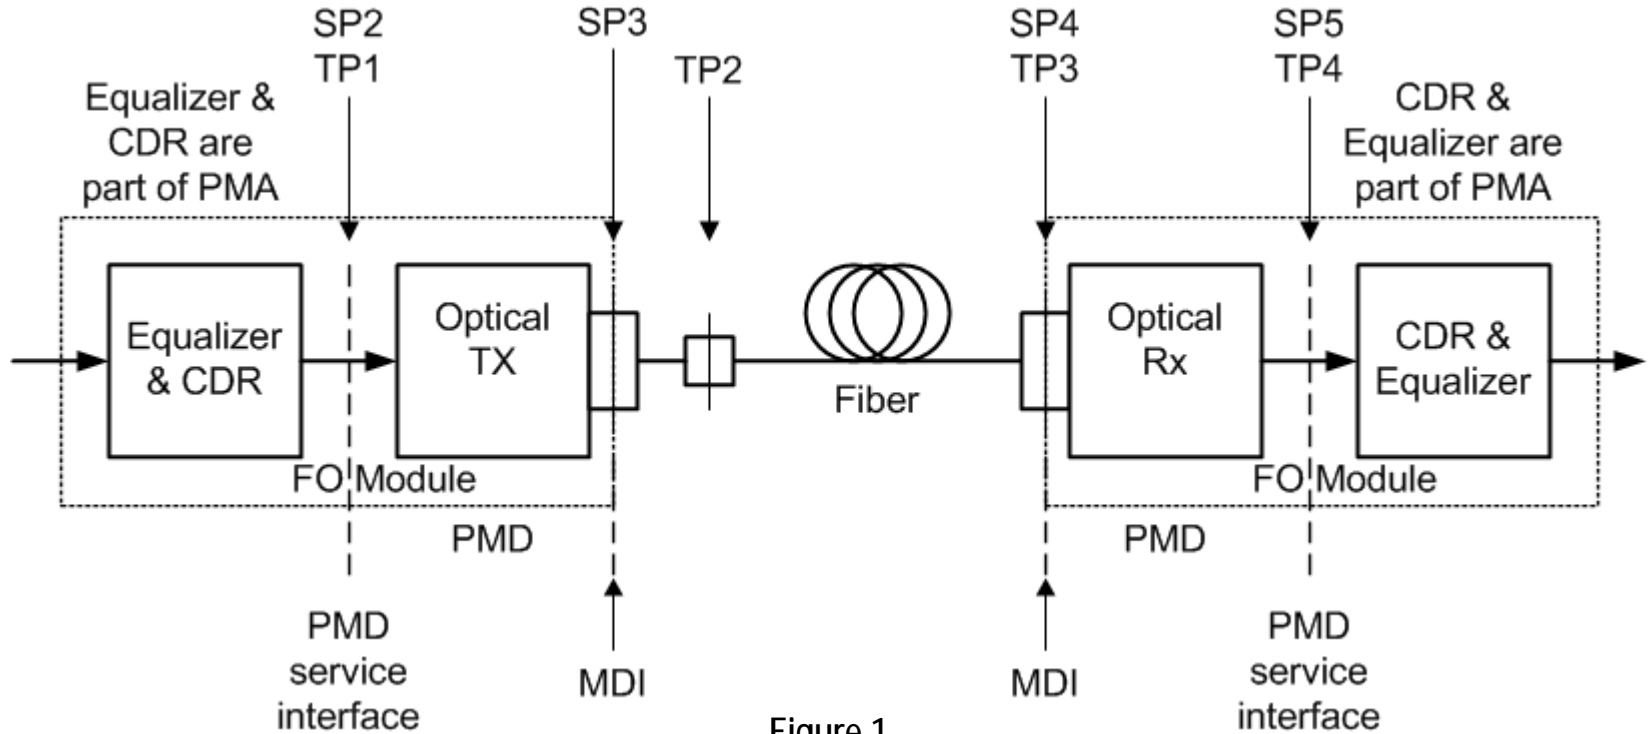


Figure 1

- Figure 1 identifies skew points, SP3 and SP4, relevant to optical interfaces.
- From 802.3 Cl 80.5, the skew at SP3 shall be less than 54 ns and the skew variation at SP3 shall be less than 600 ps.
- From 802.3 Cl 80.5, the skew at SP4 shall be less than 134 ns and the skew variation at SP4 shall be less than 3400 ps.
- The inclusion of RS-FEC (802.3bj Clause 91) does not change the maximum limits at SP3 and SP4 that were defined in 803.3ba Clause 80.5, Tables 80-4 and 80-5.
- Acceptable skew contributions from the optical cable are defined by the differences between SP4 and SP3 constraints.
- Optical cable lane skew must be less than 80 ns and lane skew variation must be less than 2800 ps.

From Fibre_characteristics_V_4_0_draft_2.xls

Parameter	Value	Unit
Aggregate bit rate after PCS coding	103.125	GBd
Link length	0.5	km
Fibre type (G.652.A&B (B1.1) or G.652.C&D (B1.3))	G.652.A&B	-
Minimum transmitter wavelength	1295	nm
Maximum transmitter wavelength	1325	nm
Maximum zero dispersion wavelength (λ_0 max)	1324	nm
Minimum zero dispersion wavelength (λ_0 min)	1300	nm
Maximum fibre dispersion slope	0.093	ps/(nm ² .km)
Maximum fiber loss for any wavelength	0.22	dB
Maximum dispersion for any wavelength	1.13	ps/nm
Minimum dispersion for any wavelength	-1.39	ps/nm
Maximum optical skew	20.0	ps
Maximum optical skew variation	40.0	ps

- Using a modified version of the fiber model tool found at http://www.ieee802.org/3/ba/public/tools/Fibre_characteristics_V_3_0.xls with entries relevant to a 500 m, 100G, parallel SMF application, due to the center wavelength range (1295 nm to 1325 nm), the max calculated skew is 20 ps (0.04 ps/m) and the max calculated skew variation is 40 ps (0.08 ps/m).
- Here the skew variation assumes that the fastest and slowest lanes in a parallel application can swap over. Hence the max skew variation can be twice the max skew.

From Kolesar_02_0508.xls

SMF cable skew factors				Skew (ps/m)
numerical aperture (NA) difference	NA, max 0.141	NA, min 0.139	cladding loR, nom 1.457	0.90
strand length difference	Differential length factor 0.0050	Propagation delay (ps/m) 5000		25.0
cabling stress difference	Stress, max (kpsi) 50	Stress, min (kpsi) 0	stress-refraction coef. 2.61E-05	4.4
total maximum skew at 1310 nm				30.28
total maximum skew variation				4.38

•Using kolesar_02_0508 found at http://www.ieee802.org/3/ba/public/may08/kolesar_02_0508.xls with entries relevant to a 500 m, 100G, parallel SMF application, it can be seen that skew is dominated by differential lane length.

- Skew due to DMD difference isn't applicable for SMF

- Skew due to relative group delay is redundant – addressed in Fibre_characteristics_V_4_0_draft_2.xls

- For 500 m of parallel SMF,

- max calculated skew is $20 \text{ ps} + 500 \text{ m} \times 29.83 \text{ ps/m} = 15.16 \text{ ns}$

- max calculated skew variation is $40 + 500 \text{ m} \times 4.38 \text{ ps/m} = 2230 \text{ ps}$

- Compared to clause 80 skew constraints**

- max calculated skew variation is 2230 ps (vs a max constraint of 2800 ps)

- max calculated skew is 14.92 ns (vs a max constraint of 80 ns)

- The delta between the max calculated skew and the max acceptable skew (80 -15.16) ns may permit an additional lane difference of approximately 13 m assuming a propagation delay of 5 ns/m.