




MPD (EAF) at TP2 specification refinement


Rubén Pérez-Aranda
(rubenpda@kdpof.com)

MPD per EAF at TP2 - 802.3bv D1.3

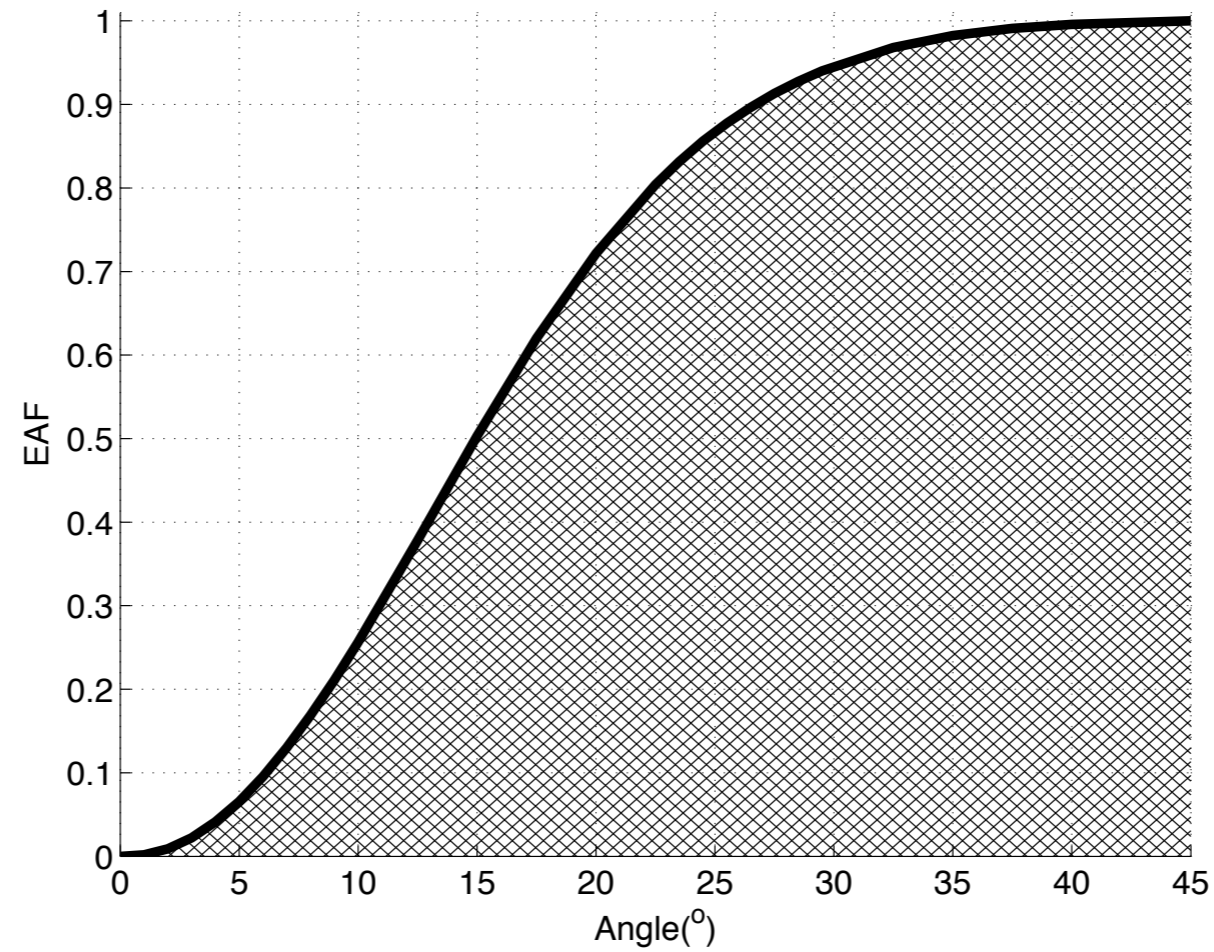

Angle (o)	EAF	Angle (o)	EAF	Angle (o)	EAF	Angle (o)	EAF
0.0	0.000	7.0	0.130	20.0	0.722	28.5	0.928
1.0	0.002	8.0	0.169	22.5	0.804	29.5	0.940
2.0	0.009	9.0	0.211	23.5	0.831	32.5	0.968
3.0	0.022	10.0	0.256	24.5	0.856	35.0	0.982
4.0	0.041	12.5	0.378	25.5	0.878	37.5	0.991
5.0	0.066	15.0	0.503	26.5	0.896	40.0	0.996
6.0	0.095	17.5	0.620	27.5	0.913	45.0	1.000

MPD per EAF at TP2 - refinement for D1.4

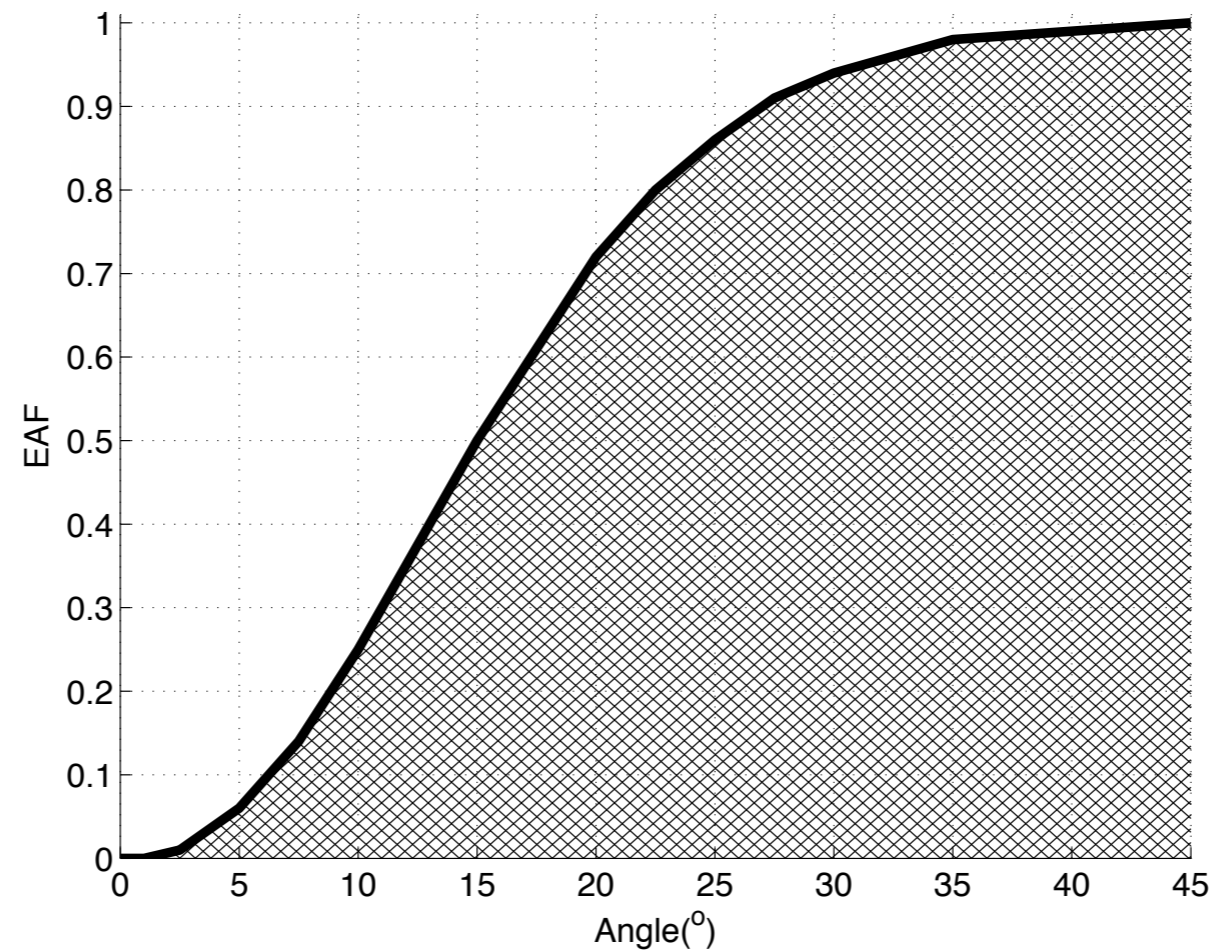

Angle (o)	EAF	Angle (o)	EAF	Angle (o)	EAF
0.0	0.00	10.0	0.25	27.5	0.91
1.0	0.00	15.0	0.50	30.0	0.94
2.5	0.01	20.0	0.72	35.0	0.98
5.0	0.06	22.5	0.80	40.0	0.99
7.5	0.14	25.0	0.86	45.0	1.00