

Call For Interest Bidirectional 10Gb/s and 25Gb/s optical access PHYs

Mar 2018

Supporters

- ▶ Akio Tajima, NEC
- ▶ Albert Rafel, British Telecom
- ▶ Barry Colella, Source Photonics
- ▶ Cao Li, Accelink
- ▶ Curtis Knittle, Cablelabs
- ▶ David Li, Hisense Broadband
- ▶ Duane Remein, Futurewei
- ▶ Frank Effenberger, Futurewei
- ▶ Franz J. Schaefer, Intel
- ▶ Glen Kramer, Broadcom
- ▶ Hal Roberts, Calix
- ▶ Jiang Yi, Accelink
- ▶ John Johnson, Broadcom
- ▶ Jun Shan Wey, ZTE
- ▶ Kazuki Tanaka, KDDI Research, Inc.
- ▶ Kent McCammon, AT&T
- ▶ Leo Lin, Finisar
- ▶ Maurizio Valvo, Telecom Italia
- ▶ Peter Dawes, Vodafone Group
- ▶ Viput Bhatt, Finisar
- ▶ Yong Guo, ZTE

Outline

- ▶ Background
- ▶ Basic requirements for optical access Ethernet
- ▶ Market considerations
- ▶ Potential solutions for BiDi PMDs

Background activities

- ▶ The origin of this work comes from network operators, who use bidirectional optics in their access networks, and want to standardize higher speeds
- ▶ There was an NEA session where the bidirectional higher speed idea was socialized
 - ▶ Generally well received, with no obvious major issues raised
- ▶ There was also a workshop between IEEE 802.3 and ITU-T SG15, where the optical access systems being standardized were discussed
 - ▶ One of the findings there was that the two groups should work to collaborate to specify bidirectional optics
- ▶ At the recent SG15 plenary, it was agreed to begin work on a new recommendation (G.9806) that would cover higher speed bidirectional fiber access links
 - ▶ This project is intended to work hand-in-hand with its counterpart in 802.3

Existing BiDi Ethernet Access

- ▶ Part of P802.3ah EFM (2004)
- ▶ 100BASE-X (CI 58, 66), 100 Mb/s, 10 km
 - ▶ 100BASE-LX10 - 2 fiber (1310 nm)
 - ▶ 100BASE-BX10 - 1 fiber (1550 nm DS, 1310 nm US)
 - ▶ Similar to ITU-T G.985
- ▶ 1000BASE-X (CI 59, 66), 1 Gb/s, 10 km
 - ▶ 1000BASE-LX10 - 2 fiber (1310 nm), SMF / MMF(550 m)
 - ▶ 1000BASE-BX10 - 1 fiber (1490 nm DS, 1310 nm US)
 - ▶ Similar to ITU-T G.986

Requirements for Access Ethernet


- ▶ Operate over single strand of single mode fiber (G.652)
- ▶ Reach of 20km typical; 40km if possible, 10km if much cheaper
- ▶ Loss budgets Class S = 0~15dB, Class A: 5~20dB
 - ▶ Maybe similar to G.985 / G.986 classes
- ▶ Silent start behavior (ONU only speaks when spoken to)
- ▶ Power saving behavior (EEE and link rate adaptation)
- ▶ OAM features, such as Port-ID
- ▶ Support for synchronization / ToD

Market considerations

- ▶ There are three main applications for P2P access Ethernet
 - ▶ FTTBusiness
 - ▶ FTTHome
 - ▶ Wireless fronthaul (and backhaul)

Use of P2P for FTTH

Figure 14 Point-multipoint network *Ethernet Active*

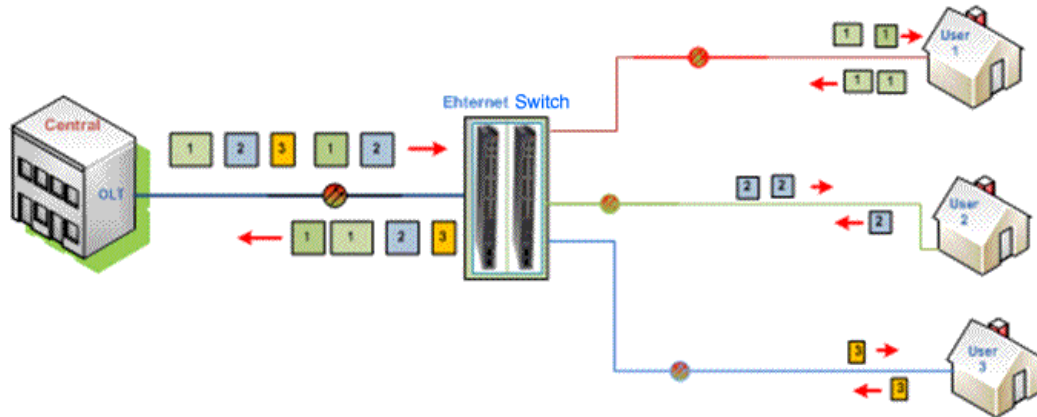

Source: ICP-ANACOM

FTTH market share by technology

- ▶ Worldwide FTTH market is quite large
 - That figure expected to remain steady over the next decade
 - Currently dominated by GPON and EPON
 - “Peak G-PON” happened in 2016
 - Expected to slowly shift to XGS-PON and 10GEPON
 - Crossover time ~2020
- ▶ P2P (aka Active Ethernet) responsible for a steady portion of FTTH revenue
 - Basically, 5% of the worldwide market

Independent Operator technology usage

- ▶ Independent telcos tend to use Active Ethernet
- ▶ A recent study showed that
 - ▶ 480 providers used G-PON
 - ▶ 193 providers use active Ethernet
 - ▶ ~30% of the independent operator market

FTTWireless

- ▶ CPRI and eCPRI look to be major applications of P2P PMDs
 - ▶ CPRI is very inefficient, easily justifying 10G or higher
 - ▶ eCPRI is thankfully more efficient, but 5G uses so much more, we still need 25G up to 100G links in the fronthaul
- ▶ Volume estimation
 - ▶ $3\text{B people} / (100 \text{ people} / \text{RU}) / 10 \text{ year rollout} = 3\text{M ports} / \text{year}$
- ▶ Per-port willingness to pay significantly higher than FTTH
 - ▶ Total revenue could surpass the existing market

Potential solutions

- ▶ The biggest issue regarding the PHY is the change to single fiber working (full duplex)
- ▶ Primarily, this is a wavelength question
 - ▶ Existing PHYs use the same wavelengths on both sides
 - ▶ This makes both sides identical, which is good for P2P (there isn't a low volume OLT and high volume ONU)
- ▶ We need to find two wavelengths, hopefully that already exist in the marketplace

Possible approach for 10Gb/s

- ▶ Start with 10GBase style optics
 - ▶ 10GBase-LR works at 1260-1355nm
 - ▶ 10GBase-ER works at 1530-1565nm
- ▶ P2P could use ER downstream, and LR upstream

Possible approach for 10Gb/s

- ▶ Start with 40GBase-_R4 style optics
 - ▶ 40GBase-LR4/ER4 use CWDM grid optics: 1271, 1291, 1311, 1331nm
- ▶ P2P could use 1331nm downstream, 1271nm upstream

Example from the marketplace

Optical Transceivers

10Gb/s Bidirectional 10km SFP+ Optical Transceiver

FTLX2071D3xx



<https://www.finisar.com/sites/default/files/styles/colorbox/public/product-images/FTLX2071D3xx%20SFP%2B%20Bi-Di.jpg?itok=eb850gQj>

Form Factor: SFP+

Finisar's FTLX2071D327/FTLX2071D333 10Gb/s Enhanced Small Form Factor Pluggable SFP+ transceivers are designed for use in 10-Gigabit Ethernet links up to 10km over a single-strand Single Mode fiber. This capability doubles the capacity of installed legacy single mode fiber links. They are compliant with SFF-8431 and IEEE 802.3ae 10GBASE-LR/LW, and 10G Fibre Channel 1200-SM-LL-L. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The FTLX2071D327/FTLX2071D333 is a "limiting module", i.e., it employs a limiting receiver. Host board designers using an EDC PHY IC should follow the IC manufacturer's recommended settings for interoperating the host-board EDC PHY with a limiting receiver SFP+ module. The optical transceiver is compliant per Directive 2011/65/EU. See Finisar Application Note AN-2038 for more details.

[Key Features](#)

[Applications](#)

[Downloads](#)

[Specifications](#)

Distance:	10 km
Data Rate (max):	10.5 Gb/s
Protocol:	10x Fibre Channel Compliant, 10 Gigabit Ethernet Compliant, Wireless CPRI Compliant
Low End Case Temperature (°C):	-40
High End Case Temperature (°C):	85
Diagnostics:	Digital
Transmitter:	DFB Laser
Receiver:	PIN
Voltage Supply:	3.3
Connector:	LC
Wavelength:	BiDi 1271/1331nm

Possible approach for 25G

- ▶ Start with 25GBase-ER style optics
 - ▶ 25GBase-ER works at 1295-1310nm
- ▶ Other wavelength could be borrowed from 802.3ca
 - ▶ One of the upstream choices is 1260-1280nm
- ▶ P2P could use 1295-1310nm downstream, 1260-1280nm upstream

Possible approach for 25 Gb/s

- ▶ Start with 100GBase-_R4 style optics
 - ▶ 100GBase-LR4/ER4 use 1295, 1300, 1305, 1310nm
- ▶ P2P could use 1310nm downstream, 1295nm upstream

Conclusions

- ▶ P2P optical access appears to be a viable use case for Ethernet technology
 - ▶ Certainly technically feasible, leveraging existing PHYs
 - ▶ Market opportunity is of reasonable size
- ▶ Why do this work in 802.3?
 - ▶ This is the rightful home of this technology
 - ▶ The special requirements (silent start) can reach a wider audience

Thank you

Questions? Comments?

Straw Poll #1

- ▶ Should a study group be formed to consider bidirectional 10Gb/s and 25Gb/s PHYs?
 - ▶ All in the room: Yes No Abs
 - ▶ 802.3 Voters: Yes No Abs

Straw Poll #2

- ▶ I would participate in the bidirectional study group, if formed?
 - ▶ Yes
 - ▶ No
 - ▶ Don't know