

# 60802 Time Sync Contribution Discussion

David McCall – Intel Corporation

Version 1

# References

- David McCall “60802 Update on Time Sync”  
<https://www.ieee802.org/1/files/public/docs2022/60802-McCall-Update-On-Time-Sync-Status-15-Nov-1122-v2.pdf>

# Agenda

- Discussion on what we need to decide.
- Normative Requirements
- Informative Text
- What Else?

# What do we need to decide?

During this meeting...so that we can write the required contribution...

# Schedule

- Intent is to have Time Sync contribution to Jordon Woods by Christmas
- Jordon will integrate the contribution into a pre-draft during first two weeks of 2023
- Pre-draft will be reviewed during 802.1 Interim (Baltimore, MA; 15<sup>th</sup>-20<sup>th</sup> January) to ensure it addresses all comments

# During this meeting...

- Decide (majority of) what the normative requirements will be and how they will be specified
- Decide (majority of) what will be in informative text
- Simulations to prove the details of some of the requirements are ongoing (some may be presented tomorrow) but should be possible to agree on normative / informative split and how normative requirements will be specified even if details (values) change
- Does the group agree?

# Normative Requirements





# Clock Requirements – 1

Topic	Value
Maximum fractional frequency offset relative to the TAI frequency for LocalClock (used for timeReceiver or Grandmaster) or Clock Target	$\pm 50$ ppm
Maximum absolute value of rate of change of fractional frequency offset for LocalClock (used for timeReceiver or Grandmaster)	-1.35 ppm/s to 2.12 ppm/s
Maximum absolute value of rate of change of fractional frequency offset for ClockTarget	$\pm 3$ ppm/s

- May split timeReceiver and Grandmaster ppm/s requirement – tighter requirement for Grandmaster.
- Is the LocalClock ppm/s requirement OK? (See next 3 slides.)
- Must be maintained over manufacturer's stated temperature and temperature ramp ranges...which 60802 does not specify.



# Clock Drift Example – Linear Temperature Ramp: $1^{\circ}\text{C}/\text{s} \updownarrow$ (125s $\updownarrow$ )

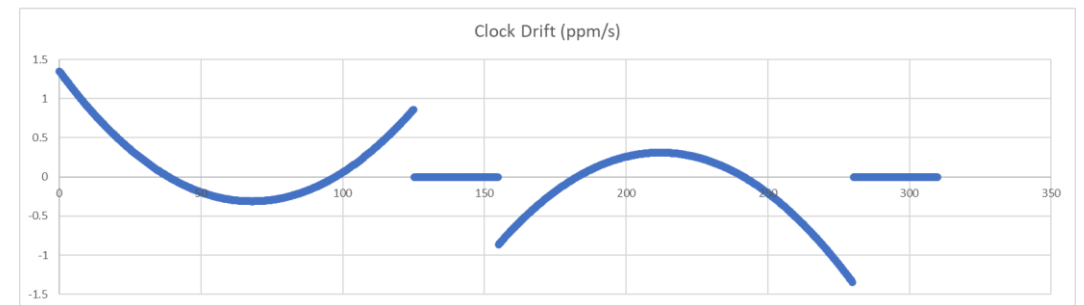
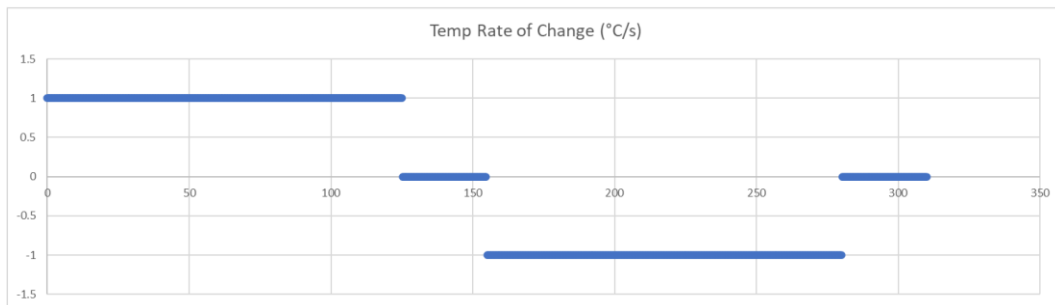
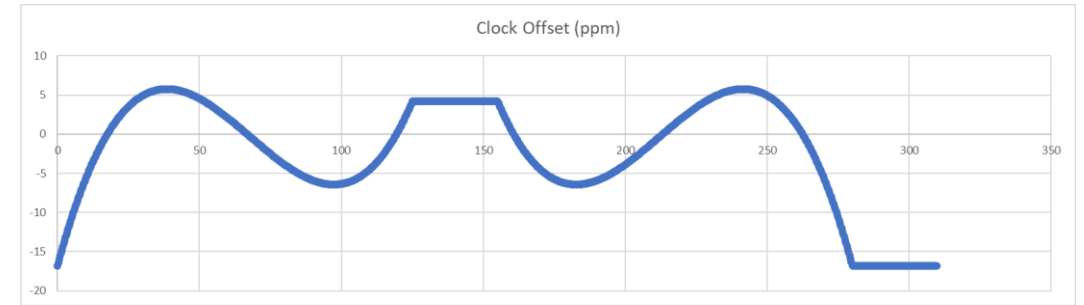
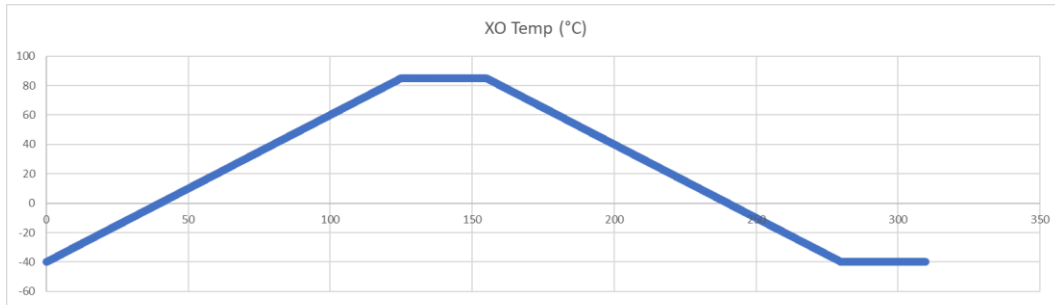


Inputs	
Temp Max	85°C
Temp Min	-40°C
Temp Ramp Rate	1°C/s
Temp Hold	30s

Temp Rate of Change	
MAX	1.00°C/s
MIN	-1.00°C/s

Clock Drift	
MAX	1.35ppm/s
MIN	-1.35ppm/s

# Clock Drift Example – Sinusoidal Temperature Ramp: 125s $\updownarrow$

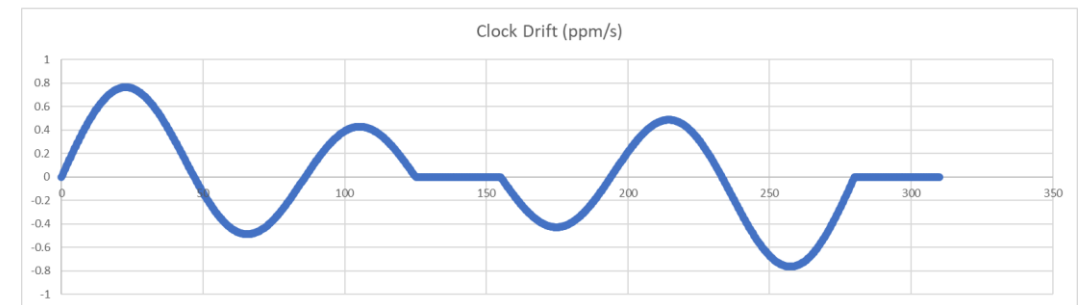
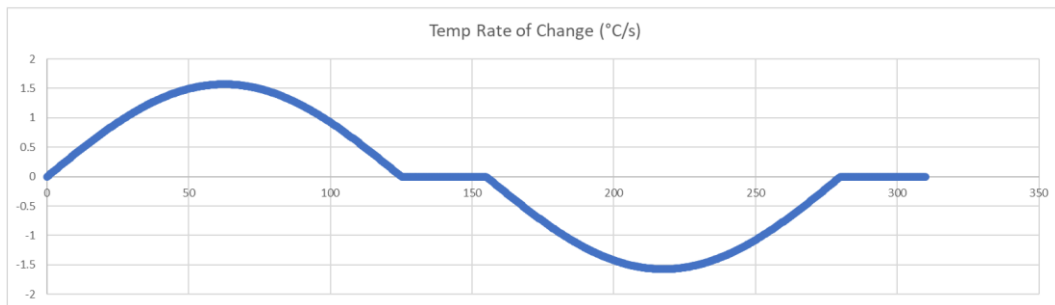
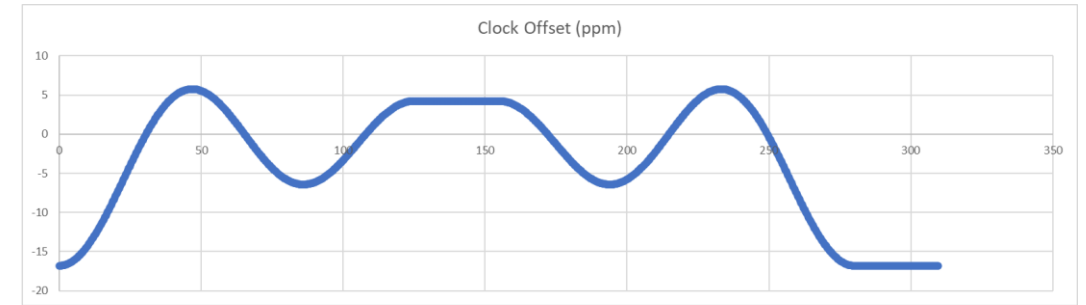
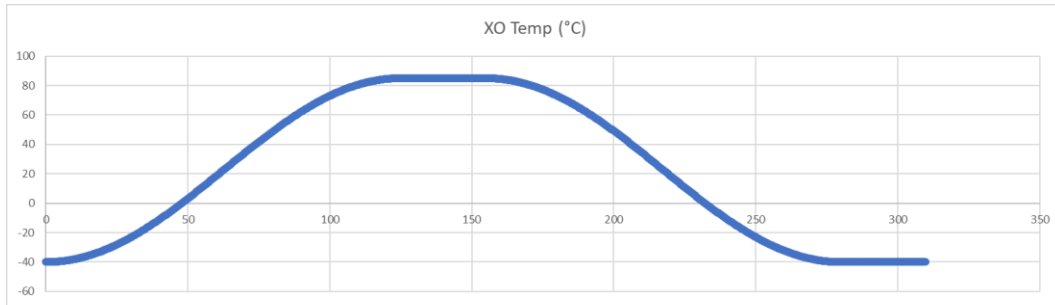


Inputs	
Temp Max	85°C
Temp Min	-40°C
Temp Ramp Period	125s
Temp Hold	30s

Temp Rate of Change	
MAX	1.57°C/s
MIN	-1.57°C/s

Clock Drift	
MAX	0.76ppm/s
MIN	-0.76ppm/s

# Clock Drift Example – Half-Sinusoidal Temperature Ramp: 125s $\updownarrow$

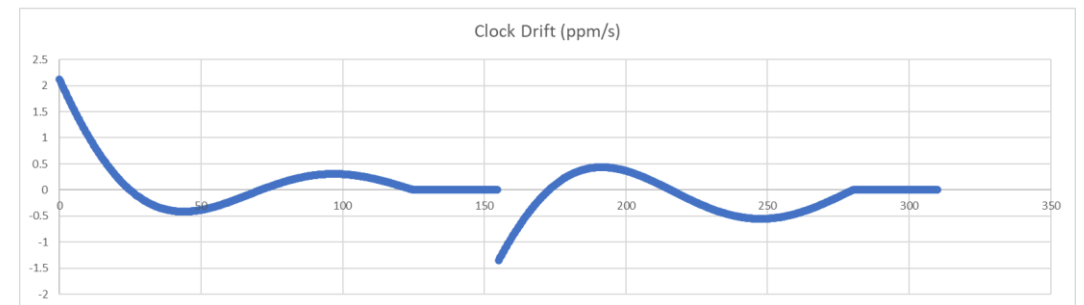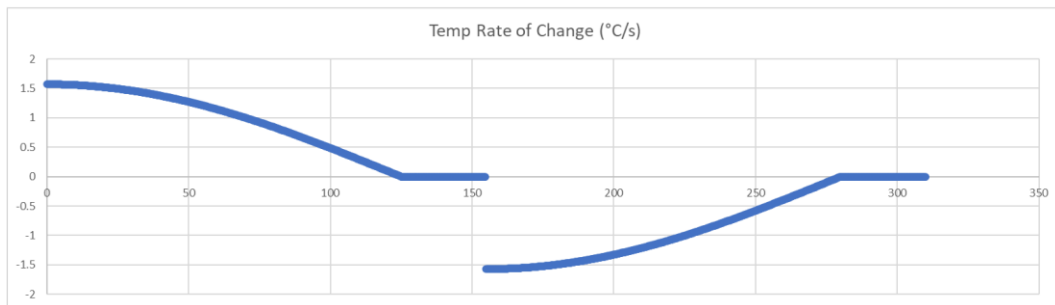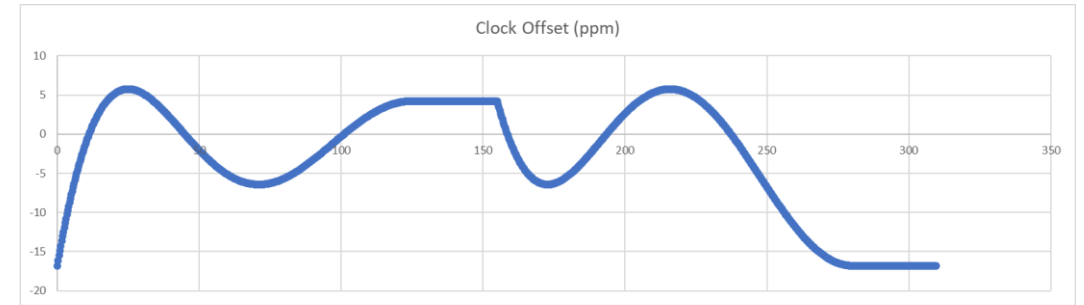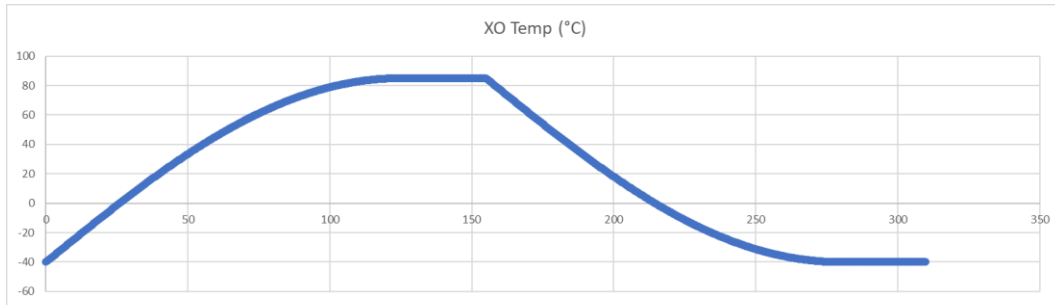

Inputs	
Temp Max	85°C
Temp Min	-40°C
Temp Ramp Period	125s
Temp Hold	30s

Temp Rate of Change	
MAX	1.57°C/s
MIN	-1.57°C/s

Clock Drift	
MAX	2.12ppm/s
MIN	-1.35ppm/s

# Clock Requirements – 2

Topic	Value
Total range of frequency adjustment for ClockTarget used for Global Time	$\pm 1000$ ppm over any observation interval of 1 ms
Total range of frequency adjustment for ClockTarget used for Local Clock	$\pm 250$ ppm over any observation interval of 1 ms

- Need to align “Required Values” with comment resolution.

# PTP Protocol Requirements – Sync & pDelay Interval

Topic	Value
Nominal Sync Interval (syncInterval) at the Grandmaster	125 ms
Tsync2sync at the Grandmaster	90% between 112.5 ms and 137.5 ms ( $\pm 10\%$ ) 100% between 87.5 ms and 162.5 ms ( $\pm 30\%$ )
Nominal pDelay Interval (pDelayInterval)	125 ms
Tpdelay2pdelay	120ms to 130ms

- For Tpdelay2pdelay, current simulations use...
  - 90% - 130% of nominal value (112.5 ms to 162.5 ms) or...
  - 95% - 105% of nominal value (118.75 ms to 131.25 ms)

# PTP Protocol Requirements – residenceTime & pDelayTurnaround

Topic	Value
Maximum Residence Time (residenceTime)	10 ms
Residence Time Distribution	95% < 6.5 ms
Sync Follow-up Message (if 2-Step)	<2.5 ms after Sync Message
Maximum pDelay Turnaround (pDelayTurnaround)	10 ms

- Residence Time, 95% < 6.5 ms is from mean 5 ms, standard deviation 0.8333 ms ( $6\sigma = 5$  ms)
- No need for tighter pDelay Turnaround requirement
  - Minimal impact on Mean Link Delay measurement
  - No need for improved timing consistency of pDelayResp messaging if  $t_{1out}$  TLV is implemented

# Correction Field, RR & NRR “Noise” Requirements

Topic	Value
Correction Field Stable Grandmaster (RR in Sync Message) Stable Upstream Node Local Clock (NRR) Stable Temperature (stable Local Clock)	Over X Sync messages, Correction Field... Mean error $\pm 0.1$ ns 90% of errors $\pm Y$ ns
Neighbour Rate Ratio – measured via Rate Ratio Stable Grandmaster (RR in Sync Message) Upstream Node Local Clock drifting at <Clock Drift Limit> (NRR) Stable Temperature (stable Local Clock)	Over X Sync messages, RR Field... Eliminate 90% of expected error?

- Dynamic clock drift ramp? Simulate temp ramp for Upstream Node Local Clock?
- Similar requirement for Rate Ratio drift if we need Rate Ratio drift compensation to achieve goal?

# New TLV

- Sent after Sync message
- Contains  $t_{1out}$  timestamp (transmit time of Sync message)
- Contains Grandmaster ID
- Same timing requirement as Follow-up message?



# Informative Text

# Informative Text

(not a comprehensive list; mainly to identify what isn't normative)

- Timestamp Granularity & Dynamic Time Stamp Error
- meanLinkDelay Error Correction
- mNRRsmoothing
  - Using  $N^{\text{th}}$  previous pDelayResp / TLV information; taking an average of previous A calculations
- NRR drift measurement & compensation
  - Using  $N^{\text{th}}$  previous pDelayResp / TLV information; taking an average of previous A calculations; going back P messages and doing it again; assuming linearity between two measurements and compensating
- RR drift measurement & compensation

# What Else?

# Additional Contribution Areas?

- ClockMaster / ClockSlave & ClockSource / ClockTarget?
- Error model? Dynamic time error vs. Constant time error?

# Thank you!