

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Corrections to Figure 87	
Date Submitted	2004-06-25	
Source(s)	Lei Wang, Adam Newham Cygnus Multimedia Communications, Inc.	Voice (760)448-1984 Fax: (760)448-1989 Email: lwang@cygnuscom.com
Re:	This is a contribution to IEEE 802.16 Cor1.	
Abstract	For the OFDMA PHY CDMA-based initial ranging, the timer T9 shall be started at BS after sending RNG-RSP (success).	
Purpose	To correct Figure 87.	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	<p>The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) <http://ieee802.org/16/ipr/patents/policy.html>, including the statement "IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard."</p> <p>Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair <mailto:r.b.marks@ieee.org> as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site <http://ieee802.org/16/ipr/patents/notices>.</p>	

Corrections to Figure 87

Lei Wang, Adam Newham
Cygnus Multimedia Communications, Inc.

1. Introduction

The timer T9 shall be started at BS after sending RNG-RSP (success) to the SS during initial ranging. However, in Figure 87 of IEEE Std 802.16-2004 for the OFDMA PHY CDMA-based initial ranging, the timer T9 was not started at all. This contribution provides a modified Figure 87 to correct this problem.

2. References

- [802.16-2004] IEEE Std 802.16-2004
[cor1/D3] IEEE P802.16-2004/Cor1/D3

3. Proposed Changes

In Cor1/D3, page 57, line 32, insert the following:

Replace Figure 87 with the following figure:

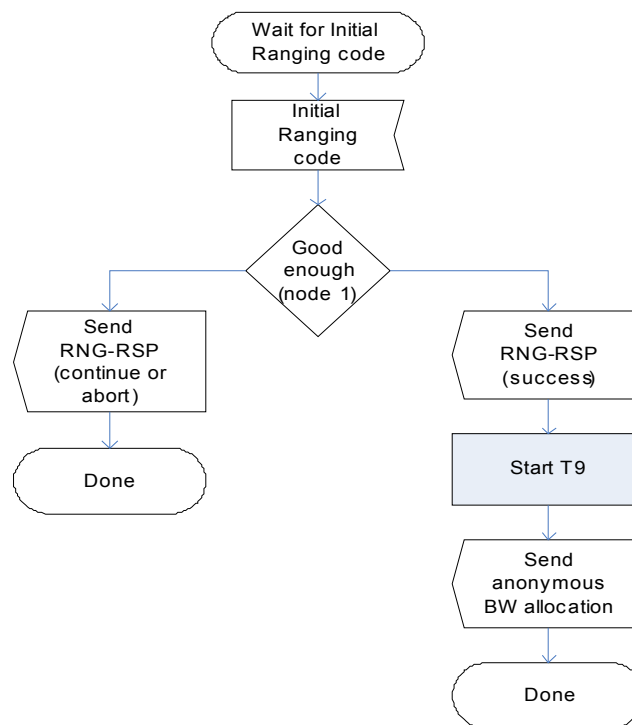


Figure 87 CDMA Initial Ranging -- BS