

Project	IEEE 802.16 Broadband Wireless Access Working Group < http://ieee802.org/16 >	
Title	Forcing all SSs to be reset at once	
Date Submitted	2005-07-09	
Source(s)	Yeongmoon Son, Jungje Son, Panyuh Joo Samsung Electronics Co. Ltd.	Voice: +82-31-279-5845 FAX: : +82-31-279-5130 ym1004.son@samsung.com
Re:	IEEE P802.16-2004/Cor1/D3	
Abstract	This contribution proposes the scheme for forcing all SSs to be reset at once	
Purpose	Discuss and adopt this contribution	
Notice	This document has been prepared to assist IEEE 802.16. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.	
Release	The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.16.	
Patent Policy and Procedures	The contributor is familiar with the IEEE 802.16 Patent Policy and Procedures (Version 1.0) < http://ieee802.org/16/ipr/patents/policy.html >, including the statement "IEEE standards may include the known use of patent(s), including patent applications, if there is technical justification in the opinion of the standards-developing committee and provided the IEEE receives assurance from the patent holder that it will license applicants under reasonable terms and conditions for the purpose of implementing the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair < mailto:r.b.marks@ieee.org > as early as possible, in written or electronic form, of any patents (granted or under application) that may cover technology that is under consideration by or has been approved by IEEE 802.16. The Chair will disclose this notification via the IEEE 802.16 web site < http://ieee802.org/16/ipr/patents/notices >.	

The way for forcing all SSs to be reset

Yeongmoon Son, Jungje Son, Panyuh Joo,

Samsung Electronics Co. Ltd

1 Introduction

1.1 Problem Statement

When BS restarts due to some critical problem, SSs should be notified that BS restarts and SS has to perform the Network Entry for the information consistency between SSs and BS. After BS restarts, it doesn't know any information about SSs. Unfortunately, SSs also still try to send or receive a data because they don't know when BS restarted. Therefore, the restart of BS requires the Network Entry of all SSs for information synchronization between SSs and BS.

In current IEEE802.16d and 16e, there is a way for BS to force SS to perform the Network Entry. That is a RES-CMD message. But, this message is sent to SS by BS in unicast manner. Therefore, if BS wants all SSs to perform the Network Entry for clearing the some problem, BS has to send RES-CMD message to each SS in 'n' times as the number of SSs which belong to BS.

We propose to introduce restart count as the number of times in which BS restarts in order make SSs recognize the BS restart.

1.2 Proposed Solution

We propose the restart count TLV encoding which is included in DCD message.

- Restart Count sent by BS :

The restart count means the number of times in which BS restarts. This restart count is incremented by one whenever BS restarts. The restart count as TLV encoding is included in DCD message

- Restart Count saved in SS :

The restart count, which BS sent via DCD message, is saved in SS in order to recognize whether BS restarts or not. Whenever SS receives DCD message from BS, it compare the restart count in DCD message with the old one saved in it. As a result, if SS detects the restart count in DCD message is different from the old one, SS decides to perform the Network Entry. Therefore, SS updates the old restart count with the restart count in DCD message and performs the Network Entry

BS may intentionally increment the restart count to be included in DCD message for the purpose of forcing all SSs to perform the Network Entry due to BS's some problem.

Because the restart count is periodically broadcasted, the restart count scheme is available regardless of SS's state (i.e. normal state, sleep, idle mode)

Figure 1 shows the operation by BS Restart Count TLV encoding in DCD message

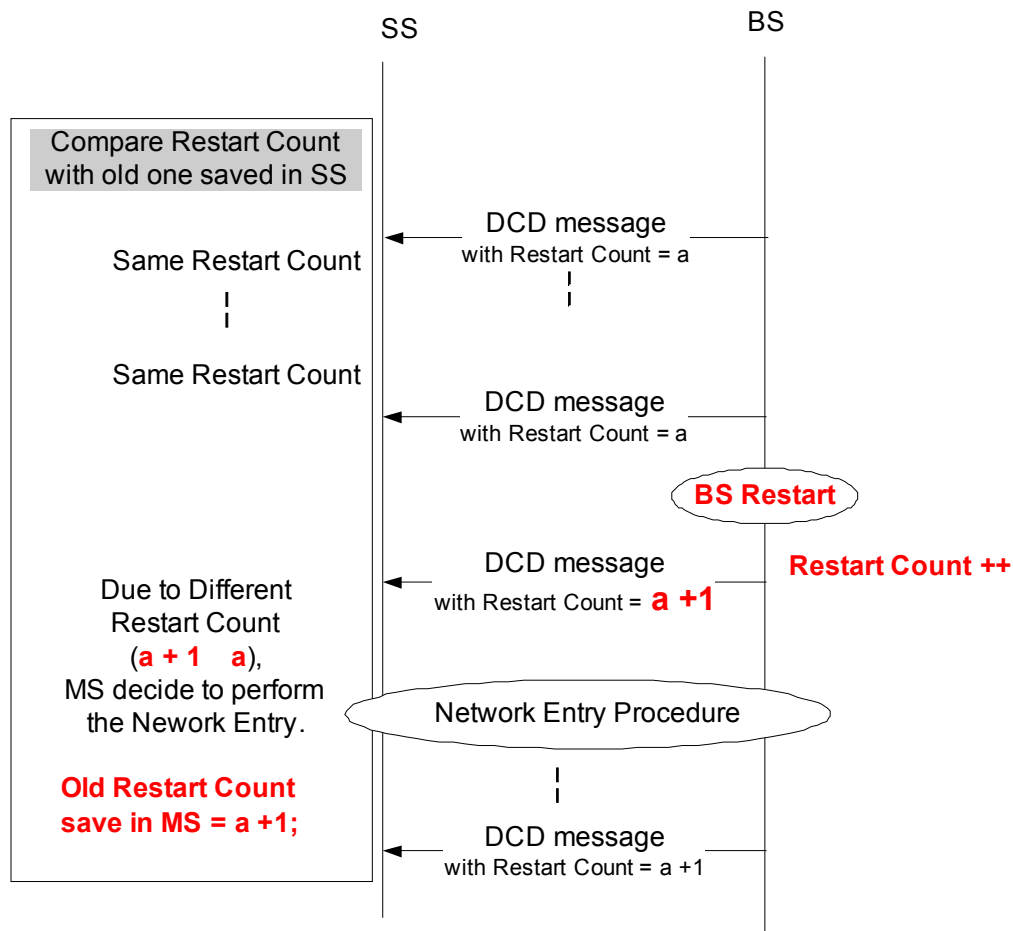


Figure 1 – The Operation by Restart Count TLV encoding in DCD message

2 Proposed Text Change

[Add the following text to Table 47 in Line 41, Page 185 of IEEE P802.16-2004/Cor1/D3 document]

Table 358— DCD channel encoding — WirelessMAN-OFDMA

Name	Type (1 byte)	Length	Value (Variable-length)	PHY scope
..
Maximum retransmission	20	1	Maximum number of retransmission in DL HARQ. Default value shall be 4 retransmissions.	OFDMA
<u>BS Restart Count</u>	<u>xx</u>	<u>1</u>	<u>The number of times in which BS restarts (see 6.3.9.11)</u>	<u>All</u>

[Insert the section 6.3.9.9 Forcing SSs to perform Network Entry at once in Line 404, Page 48 of P802.16-2004/Cor1/D3 document as follows]

6.3.9.9 Forcing SSs to perform Network Entry at once

BS may restart due to a critical error or an operator's intention. BS has the restart count as the number of times in which BS restarts. This restart count is incremented by one whenever BS restarts. The restart count as TLV encoding is included in DCD message (refer to table 358). BS may intentionally increment the restart count to be included in DCD message for the purpose of forcing all SSs to perform the Network Entry due to BS's some problem or an operator's purpose.

After BS restarts, BS shall inform SSs of its restart through the incremented restart count in DCD message. The restart count, which BS sent via DCD message, is saved in SS in order to recognize whether BS restarts or not. Restart count is updated by every BS Restart Count TLV encoding in DCD message sent by BS. In other words, whenever SS receives DCD message, it shall compare the restart count in DCD message with the old one saved in it. If SS detects the restart count in DCD message different from old one save in SS, it shall perform Network Entry.